REPORT NUMBER: 111SB-MGA-2009-003

SAFETY COMPLIANCE TESTING FOR FMVSS NO. 111SB SCHOOL BUS REARVIEW MIRRORS

COLLINS BUS CORPORATION 2008 COLLINS GRAND BANTAM SCHOOL BUS NHTSA NO.: C80900

> PREPARED BY: MGA RESEARCH CORPORATION 5000 WARREN ROAD BURLINGTON, WI 53105



**TEST DATES: JANUARY 5, 2009 - JANUARY 12, 2009** 

FINAL REPORT DATE: FEBRUARY 2, 2009

**FINAL REPORT** 

PREPARED FOR: U.S. DEPARTMENT OF TRANSPORTATION NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION ENFORCEMENT OFFICE OF VEHICLE SAFETY COMPLIANCE MAIL CODE: NVS-220 1200 NEW JERSEY AVENUE, S.E. WASHINGTON, D.C. 20590 This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Eric Peschman, Project Engineer Date: February 2, 2009

Reviewed by: Michael Janovicz, Program Manager

Date: February 2, 2009

Final report accepted by:

February 2, 2009 Date of Acceptance

Technical Report Documentation Page				
1. Report No. 111SB-MGA-2009-003	2. Government Accession No.	3. Recipient's Ca	talog No.	
<i>4. Title and Subtitle</i> Final Report of FMVSS 111 2008 Collins Grand Bantam NHTSA No.: C80900	5. Report Date February 2, 20			
NHTSA NO.: C80900		6. Performing Or MGA	ganization Code	
7. Author(s) Eric Peschman, Project Eng Michael Janovicz, Program		8. Performing Or No. 111SB-MGA-2	ganization Report 009-003	
9. Performing Organization MGA Research Corporation 5000 Warren Road		10. Work Unit No		
Burlington, WI 53105		11. Contract or G DTNH22-08-D	-00075	
12. Sponsoring Agency Nan U.S. Department of Transpo National Highway Traffic Sa Enforcement Office of Vehicle Safety Con	rtation fety Administration	13. Type of Repo Covered Final Report 1/5/09 – 1/12/0	9	
Mail Code: (NVS-220) 1200 New Jersey Avenue, S Washington, D.C. 20590	э.Е.	14. Sponsoring A NVS-220	Igency Code	
15. Supplementary Notes				
NHTSA No.: C80900 in acco	lucted on the subject 2008 Col ordance with the specifications No. TP-111SB-00 for the dete as follows: None	of the Office of Ve rmination of FMVS	hicle Safety S 111 compliance.	
17. Key Words Compliance Testing	<ul><li>18. Distribution Statement</li><li>Copies of this report are available from:</li></ul>			
Safety Engineering FMVSS 111	NHTSA, Technic Services (TIS) Mail Code: NPO- 1200 New Jersey Washington, D.C Telephone No.: ( E-mail: <u>tis@dot.c</u>	411 / Avenue, S.E. . 20590 202) 493-2833 <u>/0v</u>		
19. Security Classif. (of this report)	20. Security Classif. (of this page)	21. No. of Pages	22. Price	
Unclassified	Unclassified	45		

Form DOT F1700.7 (8-72)

# TABLE OF CONTENTS

Section		Page No
1	Purpose of Compliance Test	1
2	Test Data Summary	2
3	Compliance Test Data	5
	Data Sheet 1 - School Bus Inspection and Identification	6
	Data Sheet 2 - Mirror Location and Field of View	7
	Data Sheet 3 - Field of View Test	10
	Data Sheet 4 - Mounting Adequacy Test	11
	Data Sheet 5 - Reflectance Test	12
	Data Sheet 6 - Unit Magnification/Convex Mirror Test – All Mirrors	13
	Data Sheet 7 - Mirror Reflective Surface Area Test	17
4	Instrumentation and Equipment List	18
5	Photographs	19

# SECTION 1 PURPOSE OF COMPLIANCE TEST

Tests were conducted on a 2008 Collins Grand Bantam School Bus, NHTSA No.: C80900, in accordance with the specifications of the Office of Vehicle Safety Compliance (OVSC) Test Procedure TP-111SB-00 to determine compliance to the requirements of Federal Motor Vehicle Safety Standard (FMVSS) 111SB, "School Bus Rearview Mirrors."

This program is sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-08-D-00075.

# SECTION 2 TEST DATA SUMMARY

Based on the tests performed, the 2008 Collins Grand Bantam School Bus, NHTSA No.: C80900, appears to meet all of the requirements of FMVSS 111SB. See Test Summary Data Sheets on the following pages.

# FMVSS 111SB - SCHOOL BUS REARVIEW MIRRORS TEST SUMMARY DATA SHEET

Test Vehicle:2008 Collins Grand Bantam School BusNHTSA No.:C80900Test Lab:MGA Research CorporationTest Date:1/5/2009 - 1/12/2009

#### System A Mirrors

A. Driver Side Mirror #3 - Unit Magnification

	Pass/Fail	Comments
Mounting	Pass	
Field of View	Pass	
Surface Area	Pass	
Reflectance	Pass	
Unit Magnification	Pass	

#### B. Passenger Side Mirror #4 - Unit Magnification

	Pass/Fail	Comments
Mounting	Pass	
Field of View	Pass	
Surface Area	Pass	
Reflectance	Pass	
Unit Magnification	Pass	

C. Driver Side Mirror #5 - Convex

	Pass/Fail	Comments
Mounting	Pass	
Field of View	Pass	
Reflectance	Pass	

D. Passenger Side Mirror #6 - Convex

	Pass/Fail	Comments
Mounting	Pass	
Field of View	Pass	
Reflectance	Pass	

# FMVSS 111SB - SCHOOL BUS REARVIEW MIRRORS TEST SUMMARY DATA SHEET...continued

Test Vehicle:2008 Collins Grand Bantam School BusNHTSA No.:C80900Test Lab:MGA Research CorporationTest Date:1/5/2009 - 1/12/2009

#### System B Mirrors

E. Driver Side Front Mirror #1 - Cross View

	Pass/Fail	Comments
Mounting	Pass	
Field of View	Pass	
Overlap with System A	Pass	
Distance to Eye Point	Pass	
No Surface Discontinuities	Pass	
Surface Area	Pass	
If Convex – Radius of Curvature	Pass	
Radius of Curvature Label	Pass	
Arc Separation	Pass	
Reflectance	Pass	

F. Passenger Side Front Mirror #2 - Cross View

	Pass/Fail	Comments
Mounting	Pass	
Field of View	Pass	
Overlap with System A	Pass	
Distance to Eye Point	Pass	
No Surface Discontinuities	Pass	
Surface Area	Pass	
If Convex – Radius of Curvature	Pass	
Radius of Curvature Label	Pass	
Arc Separation	Pass	
Reflectance	Pass	

# SECTION 3 COMPLIANCE TEST DATA

#### FMVSS 111SB - DATA SHEET 1

#### SCHOOL BUS INSPECTION AND IDENTIFICATION

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

#### **GENERAL VEHICLE IDENTIFICATION**

Final Stage Manufacturer	Collins Bus Corporation	Date of Mfg.	06/2008	
Incomplete Vehicle	General Motors		02/2008	
Manufacturer	Corporation	Date of Mfg.	03/2008	
GVWR (kg)	5,579	GAWR Front (kg)	1,950	
VIN	1GDJG31K981197124	GAWR Rear (kg)	3,901	

#### **DESCRIPTION OF MIRRORS**

		Туре			
Mirror No.	Unit Mag	Convex	Cross View	Description	Manufacturer
1		Х	Х	Driver Side	
2		Х	Х	Passenger Side	
3	Х			Driver Side	Rosco Mirror
4	Х			Passenger Side	
5		Х		Driver Side	
6		X		Passenger Side	

Recorded By: Brian Road


Date: January 5, 2009

#### FMVSS 111SB - DATA SHEET 2

#### MIRROR LOCATION AND FIELD OF VIEW

Test Vehicle:2008 Collins Grand Bantam School BusNHTSA No.:C80900Test Lab:MGA Research CorporationTest Date:1/5/2009 - 1/12/2009

## **MIRROR DIAGRAM**

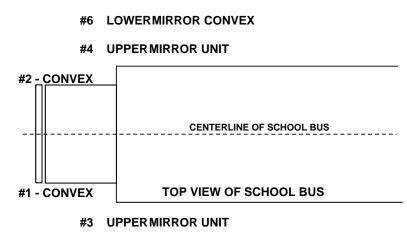

**#5 LOWERMIRROR CONVEX** 


MIRROR NO.	TYPE	MIRROR SYSTEM	CYLINDERS VIEWED (ENTIRE TOP SURFACE)
1	CROSS VIEW/CONVEX	В	E, F, H, I, J, L, M
2	CROSS VIEW/CONVEX	В	D, E, G, H, I, K, N, O, P
3	UNIT MAGNIFICATION	А	61 Meter INDICATOR
4	UNIT MAGNIFICATION	A	61 Meter INDICATOR
5	CONVEX	А	L, M
6	CONVEX	A	N, O, P

Cylinders visible by direct view: A, B, C

SEE FIGURE ON NEXT PAGE

# FMVSS 111SB - DATA SHEET 2...continued MIRROR LOCATION AND FIELD OF VIEW

Test Vehicle:2008 Collins Grand Bantam School BusNHTSA No.:C80900Test Lab:MGA Research CorporationTest Date:1/5/2009 – 1/12/2009

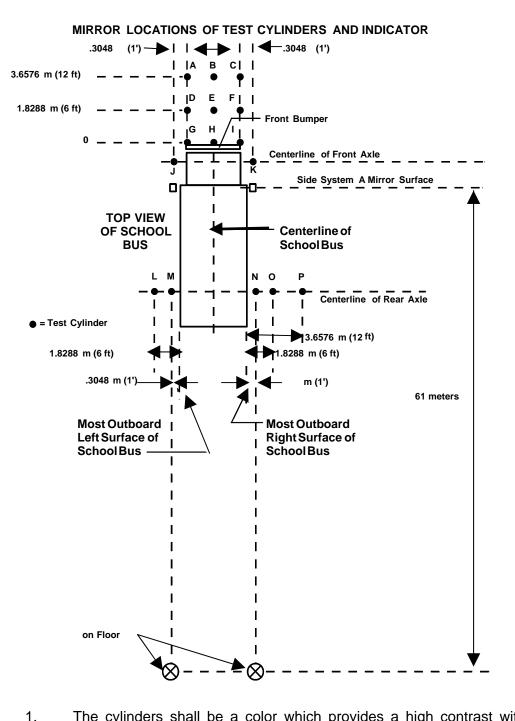

NOTES:

- The cylinders shall be a color which provides a high contrast with the surface on which the bus is parked (S13.1).
- 2. The cylinders are 0.3048 m high and 0.3048 m in diameter, except for cylinder P which is 0.9144 m high and 0.3048 m in diameter.

# FMVSS 111SB - DATA SHEET 2...continued MIRROR LOCATION AND FIELD OF VIEW

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

#### SYSTEM A AND DIRECT VISION

System A Mirrors	Pass/Fail
Entire top surface of cylinder N and the indicator 61 meters (200 feet) rearward of the mirror surface can be viewed in the photograph	Pass
Entire top surface of cylinder M and indicator 61 meters (200 feet) rearward of the mirror surface can be viewed in the photograph	Pass
Which test cylinders A through P can not be photographed directly from the driver's eye location within the semi-circle viewing area using no mirror system:	D, E, F, G, H, I, J, K, L, M, N, O, P

#### SYSTEM B ARC'S AND DISTANCE

Mirror Number (from data sheet 2)	Mirror Location	Distance from the Driver's Eye Point to the Center of the Mirror (cm)	3 Minutes of Arc (cm)	9 Minutes of Arc (cm)
#1	1	215.6	0.19	
#2	2	261.7	0.23	0.69

Distance determined in column 3 multiplied by 0.000873 yield 3 minutes of arc, for column 4, for that mirror as viewed from the driver's eye point; the distances determined in column 3 multiplied by 0.002618 yield 9 minutes of arc, for column 5, for that mirror as viewed from the driver's eye point. The minimum distance for any system B mirror between the driver's eye point and the center of the mirror is more than 95 centimeters (37.5 inches):

	Distance	Pass/Fail
Distance between center of System B mirror #1 and driver's eye point	215.6 cm	Pass
Distance between center of System B mirror #2 and driver's eye point	261.7 cm	Pass

Recorded By:

Brian Road Approved By:

Date: January 5, 2009

# FMVSS 111SB - DATA SHEET 3 FIELD OF VIEW TEST – PHOTOGRAPHS System B

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

		Pass/Fail
All test cylinders with entire top surface not directly visible from the driver's semi-circle eye location are able to be viewed with System B mirrors from the driver's semi-circle location:		Pass
All test cylinders with entire top surface not directly visible from the driver's semi-circle eye location but the image can be viewed with System B mirrors. The image is separated for the edge of the effective mirror surface of the mirror providing that image by a distance of not less than 3 minutes of arc:		Pass
If the entire top surface of test cylinder P is not directly visible from the driver's semi-circle eye location, the image can be viewed with System B mirrors from the driver's semi- circle eye location, where the angular size of the shortest dimension of that cylinder's image is not less than 3 minutes of arc, and the angular size of the longest dimension of that cylinder's image is not less than 9 minutes of arc:		Pass
Shortest arc length dimension0.16 cmLongest arc length dimension0.59 cm		
Longest arc length dimension		
For each of the test cylinders whose entire directly visible from the driver's eye location provides a view of the ground that overlaps the ground provided by System A.	n, System B	Pass

Recorded By: <u>Binan Road</u> Approved By: <u>Hichael Janon</u>

Date: January 6, 2009

# FMVSS 111SB - DATA SHEET 4 MOUNTING ADEQUACY TEST

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

MOUNTING SUPPORT OF ALL MIRRORS				
Mirror No.	Туре	Stat	Stable Support	
(from data sheet 2)	Туре	System	Yes/No	
1	Cross View/Convex	В	Yes	
2	Cross View/Convex	В	Yes	
3	Unit Magnification	A	Yes	
4	Unit Magnification	А	Yes	
5	Convex	А	Yes	
6	Convex	А	Yes	

#### MOUNTING SUBBORT OF ALL MIDDODS

	Pass/Fail
Outside mirrors free of sharp points or edges that could contribute to pedestrian injury	Pass
System B mirrors have no discontinuities in the slope of the surface of the mirror	Pass

Recorded By: Brian Road Approved By: Hichael Janon

Date: January 6, 2009

#### **FMVSS 111SB - DATA SHEET 5**

#### **REFLECTANCE TEST – ALL MIRRORS**

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

Mirror No.	Туре	Light meter reading from calibration (FC)	Light meter reading from light reflected by mirror (FC)	Pass/Fail	Observations
1	Crossview/Convex	33	25	Pass	None
2	Crossview/Convex	33	25	Pass	None
3	Unit Magnification	33	18	Pass	None
4	Unit Magnification	33	18	Pass	None
5	Convex	33	18	Pass	None
6	Convex	33	18	Pass	None

Note: Reflectance % = [Reflectance Reading / Calibration reading] x 100 Minimum Requirement = 35 percent

Mirror No.	Туре	Reflectance	Requirement
1	Crossview/Convex	76.0%	>35%
2	Crossview/Convex	76.0%	>35%
3	Unit Magnification	55.0%	>35%
4	Unit Magnification	55.0%	>35%
5	Convex	55.0%	>35%
6	Convex	55.0%	>35%

Recorded By: <u>Brian Roah</u> Approved By: <u>Hichael Janon</u>

Date: January 9, 2009

#### FMVSS 111SB - DATA SHEET 6

## UNIT MAGNIFICATION/CONVEX MIRROR TEST – ALL MIRRORS

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

#### CONVERSION DATA TABLE FROM SPHEROMETER DIAL READING TO RADIUS OF CURVATURE

## MIRROR NO. 1 (CONVEX)

Test Position	Dial Reading (inches)	Radius of Curvature (mm)	Deviation between the Average Radius of Curvature and the Test Position Radius of Curvature (mm)	Percent Deviation from the Average Radius of Curvature
1	0.05320	135.0	49.1	26.7%
2	0.03615	198.1	-14.0	-7.6%
3	0.02475	289.0	-104.9	-57.0%
4	0.05045	142.2	41.8	22.7%
5	0.05020	142.9	41.1	22.4%
6	0.03575	200.3	-16.2	-8.8%
7	0.04990	143.8	40.3	21.9%
8	0.02790	256.4	-72.3	-39.3%
9	0.05355	134.1	50.0	27.2%
10	0.03595	199.2	-15.1	-8.2%
Avg. Radius of Curvature – The summation of column 3 divided by 10: 184.1 mm		column 3 divided by 10: Curvature, Column 5:		9

## MIRROR NO. 2 (CONVEX)

Test Position	Dial Reading (inches)	Radius of Curvature (mm)	Deviation between the Average Radius of Curvature and the Test Position Radius of Curvature (mm)	Percent Deviation from the Average Radius of Curvature
1	0.05280	136.0	46.8	25.6%
2	0.03615	198.1	-15.3	-8.4%
3	0.02470	289.5	-106.7	-58.4%
4	0.05155	139.2	43.6	23.8%
5	0.05055	142.0	40.8	22.3%
6	0.03585	199.7	-16.9	-9.3%
7	0.05165	139.0	43.8	24.0%
8	0.02845	251.5	-68.7	-37.6%
9	0.05360	134.0	48.8	26.7%
10	0.03595	199.2	-16.4	-9.0%
	Avg. Radius of Curvature – The summation of column 3 divided by 10: 182.8 mm		Greatest Percent Deviation from the Average Radius of Curvature, Column 5: -58.4%	

#### FMVSS 111SB - DATA SHEET 6...continued

#### UNIT MAGNIFICATION/CONVEX MIRROR TEST – ALL MIRRORS

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

## CONVERSION DATA TABLE FROM SPHEROMETER DIAL READING TO RADIUS OF CURVATURE

## MIRROR NO. 3 (UNIT MAGNIFICATION)

Test Position	Dial Reading (inches)	Radius of Curvature (mm)	Deviation between the Average Radius of Curvature and the Test Position Radius of Curvature (mm)	Percent Deviation from the Average Radius of Curvature
1	0.00000	NA	NA	NA
2	0.00000	NA	NA	NA
3	0.00000	NA	NA	NA
4	0.00000	NA	NA	NA
5	0.00000	NA	NA	NA
6	0.00000	NA	NA	NA
7	0.00000	NA	NA	NA
8	0.00000	NA	NA	NA
9	0.00000	NA	NA	NA
10	0.00000	NA	NA	NA
Avg. Radius of Curvature – the Summation of Column 3 divided by 10: N/A			Greatest Percent Deviation from the Average Radius of Curvature, Column 5: N/A	

#### MIRROR NO. 4 (UNIT MAGNIFICATION)

Test Position	Dial Reading (inches)	Radius of Curvature (mm)	Deviation between the Average Radius of Curvature and the Test Position Radius of Curvature (mm)	Percent Deviation from the Average Radius of Curvature
1	0.00000	N/A	N/A	N/A
2	0.00000	N/A	N/A	N/A
3	0.00000	N/A	N/A	N/A
4	0.00000	N/A	N/A	N/A
5	0.00000	N/A	N/A	N/A
6	0.00000	N/A	N/A	N/A
7	0.00000	N/A	N/A	N/A
8	0.00000	N/A	N/A	N/A
9	0.00000	N/A	N/A	N/A
10	0.00000	N/A	N/A	N/A
	Avg. Radius of Curvature – the Summation of Column 3 divided by 10: N/A		Greatest Percent Deviation from the Average Radius of Curvature, Column 5: N/A	

## FMVSS 111SB - DATA SHEET 6...continued

## UNIT MAGNIFICATION/CONVEX MIRROR TEST – ALL MIRRORS

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

#### CONVERSION DATA TABLE FROM SPHEROMETER DIAL READING TO RADIUS OF CURVATURE

## MIRROR NO. 5 (CONVEX)

Test Position	Dial Reading (inches)	Radius of Curvature (mm)	Deviation between the Average Radius of Curvature and the Test Position Radius of Curvature (mm)	Percent Deviation from the Average Radius of Curvature
1	0.01415	505.0	2.5	0.5%
2	0.01505	474.9	32.7	6.4%
3	0.01495	478.0	29.5	5.8%
4	0.01365	523.5	-16.0	-3.1%
5	0.01345	531.3	-23.7	-4.7%
6	0.01370	521.6	-14.0	-2.8%
7	0.01370	521.6	-14.0	-2.8%
8	0.01365	523.5	-16.0	-3.1%
9	0.01415	505.0	2.5	0.5%
10	0.01455	491.2	16.4	3.2%
		of Curvature – the column 3 divided by 10:Greatest Percent Deviation from the Average Radius of Curvature, Column 5: 6.4%		

#### MIRROR NO. 6 (CONVEX)

Test Position	Dial Reading (inches)	Radius of Curvature (mm)	Deviation between the Average Radius of Curvature and the Test Position Radius of Curvature (mm)	Percent Deviation from the Average Radius of Curvature
1	0.01360	525.4	-21.2	-4.2%
2	0.01425	501.5	2.7	0.5%
3	0.01355	527.4	-23.2	-4.6%
4	0.01360	525.4	-21.2	-4.2%
5	0.01415	505.0	-0.8	-0.2%
6	0.01465	487.8	16.4	3.3%
7	0.01470	486.2	18.1	3.6%
8	0.01485	481.2	23.0	4.6%
9	0.01385	516.0	-11.8	-2.3%
10	0.01470	486.2	18.1	3.6%
	Avg. Radius of Curvature – the Summation of Column 3 divided by 10: 504.2 mm		Greatest Percent Deviation from the Average Radius o Curvature, Column 5: 4.6%	

# FMVSS 111SB - DATA SHEET 6...continued

# UNIT MAGNIFICATION/CONVEX MIRROR TEST – ALL MIRRORS

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

#### UNIT MAGNIFICATION IN SYSTEM A

	Pass/Fail
At least one System A Mirror on the left and right sides of the bus is unit magnification - (0 Radius of Curvature)	Pass

#### AVERAGE RADIUS OF CURVATURE OF CONVEX MIRRORS USED IN SYSTEM B

Mirror No.	Radius of Curvature	If needed, wording printed properly* Pass/Fail
1	184.1 mm	Pass
2	182.8 mm	Pass

\* If any of the Convex Mirrors in System B have an average radius of curvature less than 889 mm, then the following words must be printed on a label in type face and color that are clear and conspicuous to the driver:

"USE CROSS VIEW MIRRORS TO VIEW PEDESTRIANS WHILE BUS IS STOPPED. DO NOT USE THESE MIRRORS TO VIEW TRAFFIC WHILE BUS IS MOVING, IMAGES IN SUCH MIRRORS DO NOT ACCURATELY SHOW ANOTHER VEHICLE'S LOCATION."

Binan Road Recorded By:

Michael Janon	
$\cdot$	
	Hichael Janon

Date: January 10, 2009

# FMVSS 111SB - DATA SHEET 7 MIRROR REFLECTIVE SURFACE AREA TEST

#### SYSTEM A & B

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

### DATA TABLE FOR SURFACE AREA

System A Mirrors Mirror No.			Pass/Fail					
3	390 cm <sup>2</sup>	323 cm <sup>2</sup>	Pass					
4	4 $390 \text{ cm}^2$ $323 \text{ cm}^2$		Pass					
System B Mirrors Mirror No.			Pass/Fail					
1	1 716 cm <sup>2</sup> 258 cm <sup>2</sup>		Pass					
2	716 cm <sup>2</sup>	258 cm <sup>2</sup>	Pass					

Recorded By: <u>Brian Road</u> Approved By: <u>Hichael Janon</u>

Date: January 12, 2009

## **SECTION 4**

## INSTRUMENTATION AND EQUIPMENT LIST

Test Vehicle:	2008 Collins Grand Bantam School Bus	NHTSA No.:	C80900
Test Lab:	MGA Research Corporation	Test Date:	1/5/2009 – 1/12/2009

	Digital Caliper	Light Meter	Tape Measure	Spherometer	
Make	Starrett	AEMC	Stanley	MGA	
Model	F2730-0	CA813	Powerlock 3M	001	
Serial # (s)	021484579	04L1017Y	519	001	
Range	0-50.8 mm	2000fc, 2000lux	0 to 8 m	2.25 x 10 <sup>13</sup> (cm * Hz <sup>1/2</sup> ) ÷ W	
Accuracy	.001 mm	0.0 fc or 0.01 lux	1 mm	1.1 x 10 <sup>-13</sup> W/H <sup>1/2</sup>	
Cal. Date	09/02/08	04/30/08	09/30/08	Daily when used	
Cal. Due Date	09/02/09	04/30/09	03/30/09	N/A	

# SECTION 5 PHOTOGRAPHS

## TABLE OF PHOTOGRAPHS

<u>No.</u>		Page No.
1	Three-Quarter Left Front View of School Bus	20
2	Three-Quarter Left Rear View of School Bus	21
3	Vehicle Certification Label	22
4	Vehicle Information Label	23
5	Vehicle Tire Placard	24
6	Right Front Cross View Mirror and Mounting	25
7	Passenger Side Rearview Mirror and Mounting	26
8	Inside Rearview Mirror and Mounting	27
9	Left Front Cross View Mirror and Mounting	28
10	Driver Side Rearview Mirror and Mounting	29
11	Field of View Instrument Setup	30
12	Mirror #2 System B Field of View	31
13	Mirror #1 System B Field of View	32
14	Mirror #3 and #5 System A Field of View	33
15	Mirror #4 and #6 System A Field of View	34
16	View of Cylinder Setup from Front	35
17	Three-Quarter Left Front View of Cylinder Setup	36
18	Three-Quarter Right Front View of Cylinder Setup	37
19	Front View Looking Thru the Windshield View of Cylinder Setup	38
20	Reflectance Test Set-up	39
21	Label for Cross View Mirror Warning	40
22	Cross View Mirror Label Location	41








1/5/09 - 1/12/09 **INFORMATION** 06/2008 MANUFACTURER'S IVD WHERE APPLICABLE. THIS VEHICLE HAS BEEN COMPLETED IN **APPLICABLE FEDERAL MOTOR VEHICLE** SAFETY STANDARDS IN EFFECT ON THE THIS VEHICLE CONFORMS TO ALL ACCORDANCE WITH THE PRIOR LT225/75R16D TIRES 16 X 6.5J RIMS AT: 448 KPA ( 65 PSI) COLD 3,901 KG ( 8,600 LBS) DUAL NCOMPLETE VEHICLE MANUFACTURER: GENERAL MOTORS CORPORATION Test Dates: DATE OF MANUFACTURE: NCOMPLETE VEHICLE DATE OF MANUFACTURE: 03/2008 NA REAR GAWR: WITH: VIN: 1GDJG31K981197124 41175 CGB6WR-13G 1,950 KG ( 4,300 LBS) LT225/75R16D TIRES 16 X 6.5J RIMS AT: 448 KPA ( 65 PSI) COLD 5,579 KG (12,300 LBS) MGA RESEARCH CORPORATION COLLINS BUS CORPORATION HUTCHINSON, KS 67504-2946 VEHICLE TYPE: SCHOOL BUS MANUFACTURED BY: P.O. BOX 2946 620-662-9000 NIA UNIT NUMBER: SPARE GVWR: WITH: GAWR: FRONT 41175 Test Lab:

C80900

NHTSA No.:

2008 COLLINS GRAND BANTAM SCHOOL BUS

Test Vehicle:

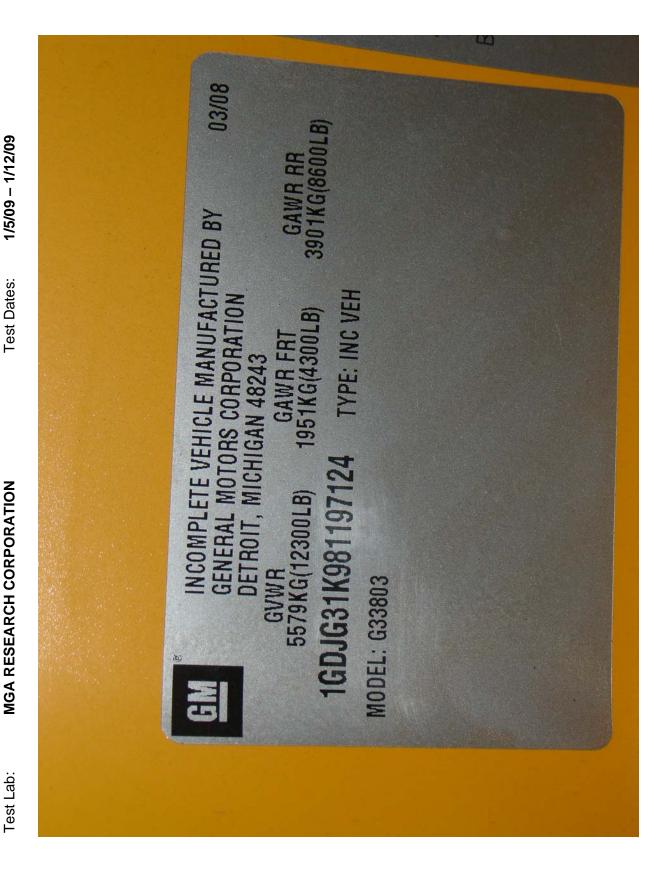

C80900

NHTSA No.:

2008 COLLINS GRAND BANTAM SCHOOL BUS

Test Vehicle:


	en e									
C80900 1/5/09 – 1/12/09			REAR 22	1,369 kg or 3,018 lbs.	SEE OWNER'S	MANUAL FOR	ADDITIONAL	INFORMATION		OMPLETED IN IE PRIOR E APPLICABLE.
NHTSA No.: Test Dates:			FKUNI 1	never exceed				I		THIS VEHICLE HAS BEEN COMPLETED IN ACCORDANCE WITH THE PRIOR ANLIFACTURER'S IVD WHERE APPLICABLI
SCHOOL BUS N			IUIAL 23	nd cargo should	COLD TIRE PRESSURE	448 KPA, 65 PSI	448 KPA, 65 PSI	N/A		THIS VEHICLE HAS BEEN COMPLETED IN ACCORDANCE WITH THE PRIOR MANUFACTURER'S IVD WHERE APPLICABLE.
COLLINS GRAND BANTAM SCHOOL BUS RESEARCH CORPORATION		SEATING CABACIEV	SEALING CAPACILY	The combined weight of occupants and cargo should never exceed 3,018 3,018	SIZE	LT225/75R16D	LT225/75R16D	N/A		COLLINS
2008 COLLI MGA RESE				e combine	TIRE	FRONT	REAR	SPARE	41175	0
Test Vehicle: Test Lab:		-	-7	F					41	










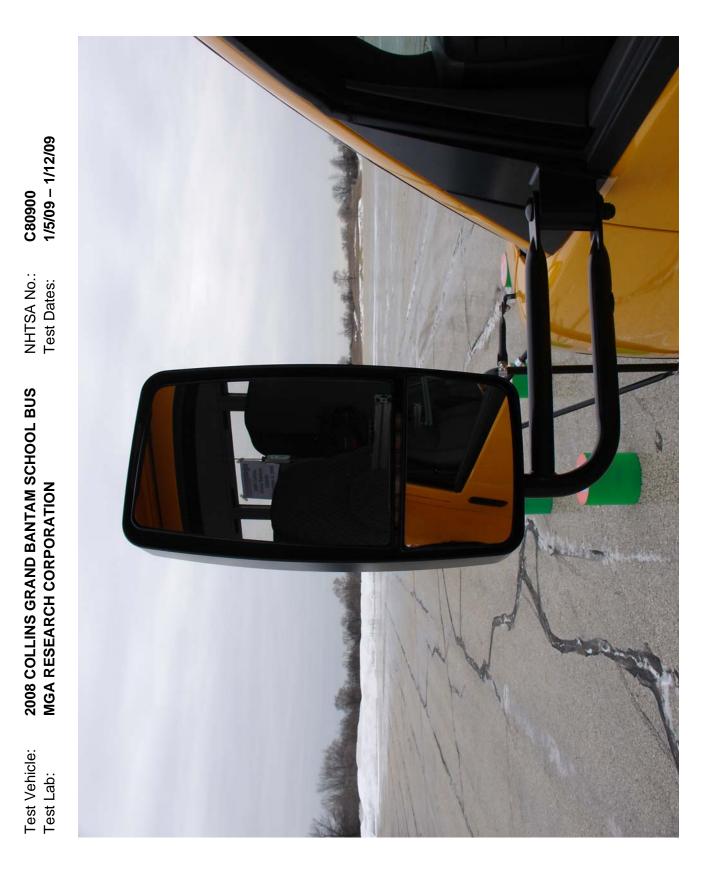





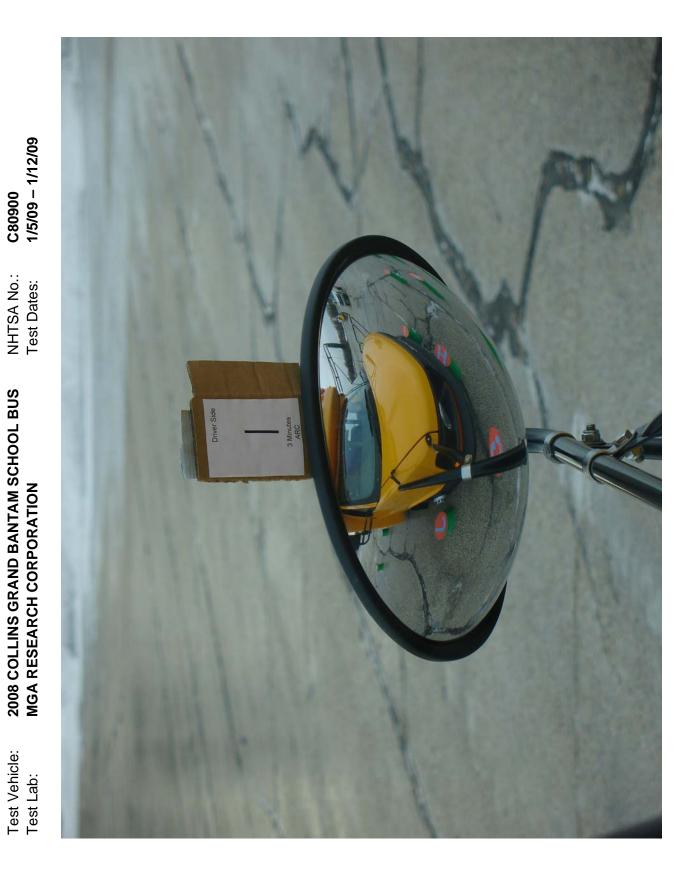











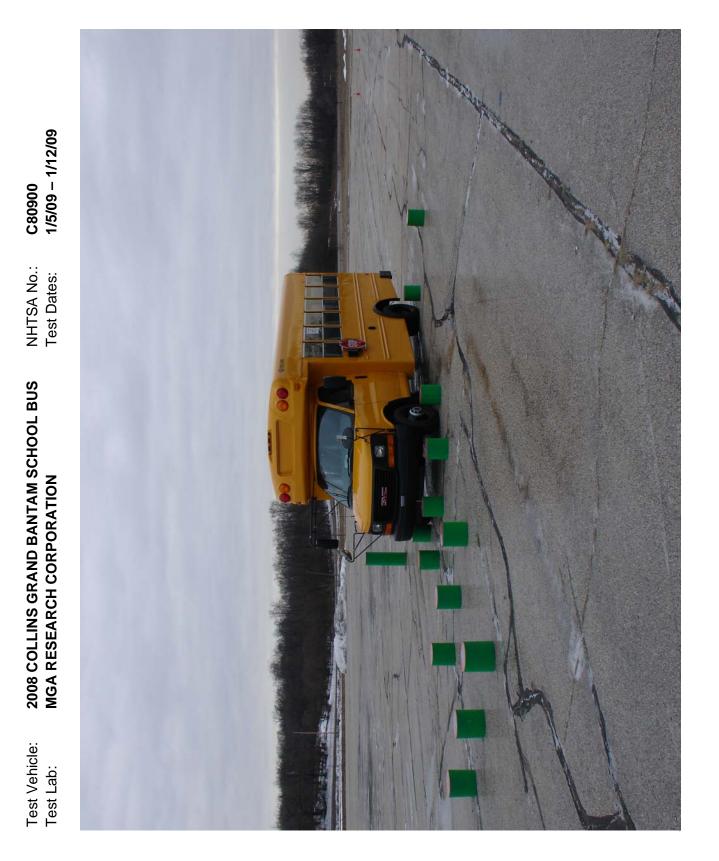






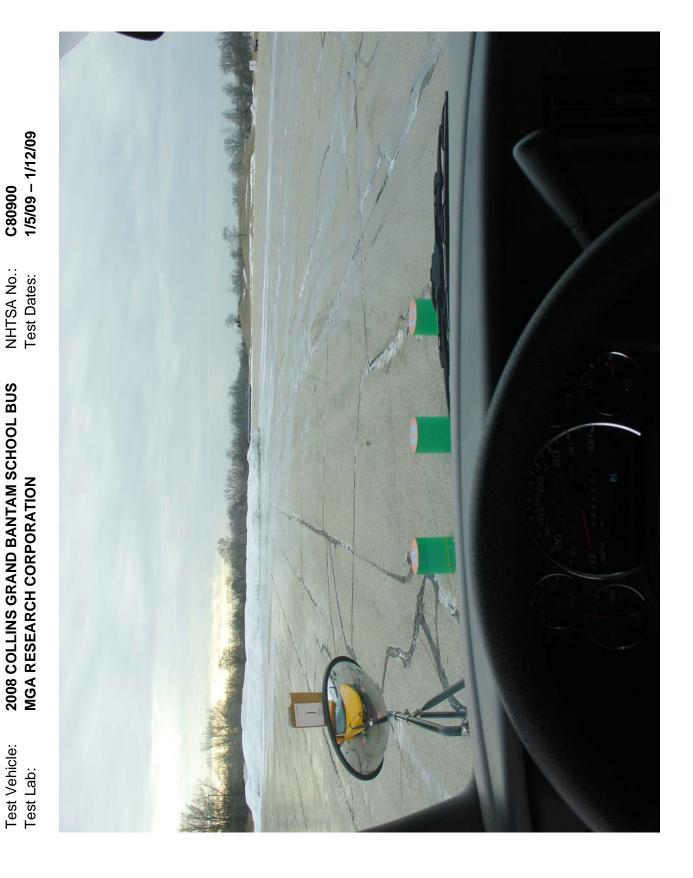

NHTSA No.: Test Dates: 2008 COLLINS GRAND BANTAM SCHOOL BUS MGA RESEARCH CORPORATION Test Vehicle: Test Lab:

C80900 1/5/09 – 1/12/09

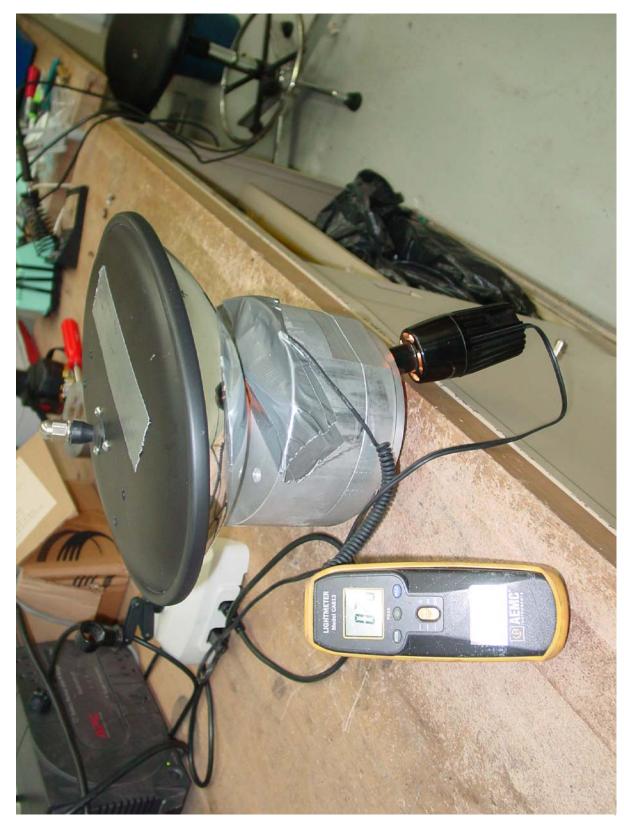



C80900

NHTSA No.:

2008 COLLINS GRAND BANTAM SCHOOL BUS

Test Vehicle:

