REPORT NUMBER: 131SB-MGA-2009-004

SAFETY COMPLIANCE TESTING FOR FMVSS NO. 131SB SCHOOL BUS PEDESTRIAN SAFETY DEVICES

BLUE BIRD BODY COMPANY 2009 BLUE BIRD MICRO BIRD SCHOOL BUS NHTSA NO.: C90902

> PREPARED BY: MGA RESEARCH CORPORATION 5000 WARREN ROAD BURLINGTON, WI 53105



TEST DATE: JANUARY 14, 2009

FINAL REPORT DATE: JANUARY 29, 2009

FINAL REPORT

PREPARED FOR: U.S. DEPARTMENT OF TRANSPORTATION NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION ENFORCEMENT OFFICE OF VEHICLE SAFETY COMPLIANCE MAIL CODE: NVS-220 1200 NEW JERSEY AVENUE, S.E. WASHINGTON, D.C. 20590

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by: Eric Peschman, Project Engineer Date: January 29, 2009

Mike Janovicz, Program Manager Reviewed by:

Date: January 29, 2009

Final report accepted by:

January 29, 2009 Date of Acceptance

Т	echnical Report Documenta		
<i>1. Report No.</i> 131SB-MGA-2009-004	2. Government Accession No.	3. Recipient's Ca	italog No.
<i>4. Title and Subtitle</i> Final Report of FMVSS 131 Compliance Testing of 2009 Blue Bird Micro Bird School Bus NHTSA No.: C90902		5. Report Date January 29, 20 6. Performing Or MGA	
7. Author(s) Eric Peschman, Project Engineer Mike Janovicz, Program Manager 9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105		8. Performing Or No. 131SB-MGA-2 10. Work Unit No 11. Contract or G	Grant No.
 12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance Mail Code: (NVS-220) 1200 New Jersey Avenue, S.E. Washington, D.C. 20590 		DTNH22-08-D-00075 13. Type of Report and Period Covered Final Report 1/14/09 – 1/28/09 14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes			
 16. Abstract Compliance tests were conducted on the subject, 2009 Blue Bird Micro Bird School Bus, NHTSA No.: C90902, in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-131SB-01 for the determination of FMVSS 131 compliance. Test failures identified were as follows: None 			
Safety Bus Compliance Testing Safety Engineering FMVSS 131 Copies from: NHTSA Services Mail Coo 1200 Ne Washing Telepho		from: NHTSA Technica Services (TIS) Mail Code: NPO- 1200 New Jersey Washington, D.C Telephone No.: (E-mail: <u>tis@dot.c</u>	port are available al Information 411 y Avenue, S.E. 20590 202) 493-2833
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 26	22. Price

. ...

Form DOT F1700.7 (8-72)

TABLE OF CONTENTS

Section		Page No
1	Purpose of Compliance Test	1
2	Test Data Summary	2
3	Compliance Test Data	4
	Data Sheet 1 - Dimensions of Stop Signal Arm (S5.1)	5
	Data Sheet 2 - Surface Content and Labeling (S5.2)	6
	Data Sheet 3 - Conspicuity (S5.3)	7
	Data Sheet 4 - Stop Signal Arm Installation (S5.4)	10
	Data Sheet 5 - Stop Signal Arm Operation (S5.5)	11
4	Instrumentation and Equipment List	12
5	Photographs	13

SECTION 1 PURPOSE OF COMPLIANCE TEST

Tests were conducted by MGA Research Corporation-Wisconsin Operations on a 2009 Blue Bird Micro Bird School Bus, NHTSA No.: C90902, in accordance with the specifications of the Office of Vehicle Safety Compliance (OVSC) Test Procedures TP-131SB-01 to determine compliance to the requirements of Federal Motor Vehicle Safety Standard (FMVSS) 131, "School Bus Pedestrian Safety Devices."

This program is sponsored by the National Highway Traffic Safety Administration (NHTSA), under Contract No. DTNH22-08-D-00075.

SECTION 2 TEST DATA SUMMARY

Based on the tests performed, the 2009 Blue Bird Micro Bird School Bus, NHTSA No.: C90902, appears to meet all of the requirements of FMVSS 131SB. See Test Summary Data Sheets on the following pages.

FMVSS 131SB, SCHOOL BUS PEDESTRIAN SAFETY DEVICES <u>VEHICLE INFORMATION AND TEST SUMMARY</u>

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

VIN	1FDDE35L19DA17396	Chassis Cab	Yes
No. of Stop Signal Arms	1	Rear Engine	No
Pass. Capacity (driver included)	17	Tire Size (on bus)	LT245/75R16
Stop Signal Arm Manufacturer	Specialty Manufacturing Inc.		

DATA FROM CERTIFICATION LABEL

Final Stage Manufacturer	Blue Bird Body Company	Date of Mfg.	12/08
Incomplete Vehicle Manufacturer	Ford Motor Company	Date of Mfg.	10/08
GVWR (kg)	4,356	GAWR Front (kg)	1,838
		GAWR Rear (kg)	2,760

TEST SUMMARY

	Pass/Fail or N/A
Dimensional Requirements (S5.1)	Pass
Surface Content and Labeling (S5.2)	Pass
Conspicuity Requirements (S5.3)	Pass
Location and Position Requirements (S5.4)	Pass
Arm Operation Requirements (S5.5)	Pass

Note: The 2009 Blue Bird Micro Bird School Bus was only equipped with one stop signal arm.

SECTION 3 COMPLIANCE TEST DATA

DIMENSIONS OF STOP SIGNAL ARM (S5.1)

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

"Regular octagon" with diameter of at least 450 mm (point to point).

	Forward Signal Arm (mm)
Diameter 1	495
Diameter 2	495
Diameter 3	496
Diameter 4	495
Range (max. – min.)	1

Requirements	Yes, No, N/A
Are all octagon diameter values ≥ 450 mm?	Yes
Is range of octagon diameter values ≤ 12 mm?	Yes
Are all octagon chord dimensions equal within 6 mm?	Yes

Test Results		Pass/Fail
S5.1	Dimensions of Stop Signal Arm	Pass

Tested By: Bin Road Approved By: Hichal Janon

SURFACE CONTENT AND LABELING (S5.2)

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

Poquiromonto	Forward Signal Arm	
Requirements	Front Side	Aft Side
Color RED except for border & legend (Yes/No)	Yes	Yes
Color of border is WHITE (Yes/No)	Yes	Yes
Color of word "STOP" is WHITE (Yes/No)	Yes	Yes
Word "STOP" is in upper case letters (Yes/No)	Yes	Yes
Width of border (≥ 12 mm)	14 mm	14 mm
Percent of border obscured by mounting brackets, clips, or bolts, or other components* ($\leq 15\%$)	0%	13.2%
Height of letters (≥ 150 mm)	153 mm	153 mm
Stroke width of letters (≥ 20 mm)	25 mm	25 mm

* = In addition to area obscured by 2 optional red lamps, if installed.

NOTE:

1. Front side of rearmost signal arm shall not contain any lettering or border.

Test Results		Pass/Fail
S5.2	Surface content and labeling	Pass

Tested By: Brin Roak Approved By: Hichael Jane

CONSPICUITY (S5.3)

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

The Stop Signal Arm shall comply with either S5.3.1 or S5.3.2, or both.

Requirements	Forward Signal Arm	
Requirements	Front Side	Aft Side
Entire surface of stop signal arm reflectorized except for mounting brackets, clips, bolts, or other necessary components. Front side of rearmost stop signal arm must not be reflectorized. (Yes/No)	Yes	Yes
Percent of entire surface obscured by mounting brackets, clips, bolts or other components necessary for mechanical or electrical operation. (7.5% max. each side)	0%	3.61%

FMVSS 131SB – DATA SHEET 3...continued

CONSPICUITY (S5.3)

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

	Stop Signal Arm
Item	Forward
Does the stop sign(s) have illuminated lettering? If optional illuminated lettering is installed, the following requirements apply in addition to reflectorized surface. (Yes/No)	No

OPTIONAL ILLUMINATED LETTERING (S5.3.1.1)

Requirements		Forward Signal Arm	
		Front Side	Aft Side
Only Red lamps used (Yes/No)		N/A	N/A
Red lamps form the complete shape of each the legend. (Yes/No)	letter of	N/A	N/A
Red lamps centered within stroke of each letter (Yes/No) or Red lamps outline each letter in immediately surrounding area (Yes/No)		N/A	N/A
The shape of each letter remains constant (Y	es/No)	N/A	N/A
	"S"	N/A	N/A
Net stroke width \geq 15 mm (stroke width	"T"	N/A	N/A
minus lamp width)	"O"	N/A	N/A
	"P"	N/A	N/A
flashes/min.)	Lamps on each side of the signal arm flash (60-120 flashes/min.)		N/A
Lamps current "on" time of 30% to 75% of the total flash cycle Total current "on" time for the two terminals shall be between 90-110% of the total flash cycle. If Xenon short-arc lamps – "off" time before each flash of at least 50% of the total flash cycle.		N/A	N/A
		N/A	N/A
		N/A	N/A

FMVSS 131SB – DATA SHEET 3...continued

CONSPICUITY (S5.3)

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

Requirements	Forward Signal Arm		
	Front Side	Aft Side	
Are the Red Lamps centered on the vertical centerline? (At least 2, enter quantity)	Yes - 2	Yes - 2	
Is one lamp at extreme top and another at extreme bottom? (Yes/No)	Yes	Yes	
Do the lamps on each side of the signal arm flash alternately? (60-120 flashes/min.) (Yes/No)	Yes - 80	Yes - 80	
Lamps current "on" time of 30% to 75% of the total flash cycle. (Yes/No)	Yes	Yes	
Total current "on" time for two terminals shall be between 90 and 110% of the total flash cycle. (Yes/No)	Yes	Yes	
If Xenon short-arc lamps-"off" time before each flash of at least 50% of total flash cycle. (Yes/No)	N/A	N/A	
Is there a symbol "DOT" on each lamp lens? (Yes/No) (Not Required)	No	No	
Additional markings on lamp lenses	SAE J1133 FMVSS 131	SAE J1133 FMVSS 131	

RED FLASHING LAMPS (S5.3.2)

MARKINGS ON THE FLASHER

Make	Blue Bird – Weldon Technologies, Inc.	Serial No.	N/A
Model	1656743	Date of Mfg.	N/A

Test Results		Pass/Fail or N/A
S5.3.1	Reflectorized Material	Pass
S5.3.1.1	Optional Illuminated Lettering	N/A
S5.3.2	Red Flashing Lamps	Pass

Tested By: Brian Road Approved By: Hichal Janog

STOP SIGNAL ARM INSTALLATION (S5.4)

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

Dimensions and angles measured with Signal Arm in the extended position.

Requirements	Stop Signal Arm	
	Forward	
Signal arm perpendicular to side of bus (Measure angle between vertical plane of side of bus and vertical plane of the signal arm.) $90 \pm 5^{\circ}$	93.5°	
Top edge of signal arm parallel to horizontal plane (Measure angle between vertical plane of side of bus and the top edge of the signal arm.) $90 \pm 5^{\circ}$	88.7°	
Top edge of signal arm not more than 152.4 mm from a horizontal pl lower edge of frame of passenger window immediately behind the dr	0	
Measure top corner closest to the school bus to the bottom edge of the window.	24 mm	
Measure top corner furthest from school bus to the bottom edge of the window.	24 mm	
Vertical centerline of signal arm not less than 228.6 mm away from side of bus	371 mm	
Stop signal arm(s) installed on left side of bus (Yes, No, or Not Applicable)	Yes	

	Test Results	Pass/Fail or N/A
S5.4	Stop Signal Arm Installation	Pass

Tested By: Brian Road Approved By: Hichal Janon

STOP SIGNAL ARM OPERATION (S5.5)

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

Stop Signal Arm(s) shall be automatically extended, at a minimum, whenever the red signal lamps on the bus required by FMVSS 108 are activated; except that a manual override device may be installed that prevents automatic extension.

Doguiromente	Stop Signal Arm	
Requirements	Forward	
Signal Arm(s) automatically extended when red lights are activated and override device is not activated. (Yes, No, or Not Applicable)	Yes	
If a MANUAL OVERRIDE DEVICE is installed, enter applicable data below:		
Mechanism for activating the override device is within reach of the school bus driver (Yes/No)	N/A	
While the override device is activated; there is a continuous or intermittent signal audible to the driver unless equipped with optional cut-off timing device (Measure duration \geq 10 min.) (Yes/No)	N/A	
If audible signal is equipped with optional cut-off timing device, it sounds for at least 60 seconds while the manual override is activated. (Measure 3 times, duration \geq 60 sec.)	N/A	
If audible signal is equipped with optional cut-off timing device, it automatically recycles every time the service entry door is opened while the engine is running and the manual override is engaged. (Recycle 3 times, Yes/No each cycle)	N/A	

Describe location and mode of operation of the manual override control, if installed:

No manual override device, which allowed overhead lights to flash and stop signal arm <u>NOT</u> to extend, was installed on this vehicle.

	Test Results	Pass/Fail or N/A
S5.5	Stop Signal Arm Operation	Pass

Brian Road Approved By: Tested By:

Hichal)

SECTION 4

INSTRUMENTATION AND EQUIPMENT LIST

Test Vehicle:	2009 Blue Bird Micro Bird School Bus	NHTSA No.:	C90902
Test Lab:	MGA Research Corporation	Test Date:	1/14/09

Identify the instruments used during this test and record their make, model, serial number, range, accuracy, and calibration date.

	Digital Caliper	Inclinometer	Tape Measure
Make	Mitutoyo	Digital Protractor	Stanley
Model	CD-6"6X	Pro 360	Powerlock 3M
Serial # (s)	06398228	002	549
Range	0 to 150 mm	0 to 360 degrees	0 to 8 m
Accuracy	0.01 mm	0.1 degree	1 mm
Cal. Date	09/11/08	Daily	09/30/08
Cal. Due	09/11/09	N/A	03/30/09

SECTION 5 PHOTOGRAPHS

TABLE OF PHOTOGRAPHS

Photo No.		<u>Page No.</u>
1	3/4 Frontal View from Left Side of Vehicle with Stop Signal Arm(s) Extended	14
2	Vehicle Certification Label	15
3	Manufacturer Information Label	16
4	Vehicle Tire Placard	17
5	Front Close Up View of Stop Signal Arm	18
6	Back Close Up View of Stop Signal Arm	19
7	Close Up View of the Switches That Allow Extension of the Stop Signal Arm(s)	20
8	Switch Console Relative to the Driver Seating Position	21
9	Flasher Unit	22

 Test Vehicle:
 2009 BLUE BIRD MICRO BIRD SCHOOL BUS

 Test Lab:
 MGA RESEARCH CORPORATION

NHTSA No.: **C90902** Test Date: **1/14/09**



V.I.N. 1FDDE35L19DA17396 TYPE CLASSIFICATION SCHOOL BUS

APPLICABLE FEDERAL MOTOR VEHICLE SAFETY STANDARDS, (AND BUMBER AND MANUFACTURERS 'IVD, WHERE APPLICABLE. THIS VEHICLE CONFORMS TO ALL THEFT PREVENTION STANDARDS, IF APPLICABLE) IN EFFECT IN 10/08 THIS VEHICLE HAS BEEN COMPLETED IN ACCORDANCE WITH THE PRIOR

TIRES TIRES RIMS. AT 379 KPA (55 PSI) COLD SINGLE RIMS. AT 551 KPA (80 PSI) COLD SINGLE GAWR: REAR 2760 KG (6084 LB) WITH LT245/75R16E GAWR : FRONT 1838 KG (4050 LB) WITH LT245/75R16E BLUE BIRD BODY COMPANY GVWR: 4356 KG (9600 LB) SUITABLE TIRE - RIM CHOICE MANUFACTURED BY DATE OF MFR. 12/08 16X7.0K 16X7.0K

C90902

NHTSA No.:

2009 BLUE BIRD MICRO BIRD SCHOOL BUS


Test Vehicle: Test Lab:

MGA RESEARCH CORPORATION

1/14/09

Test Date:

15

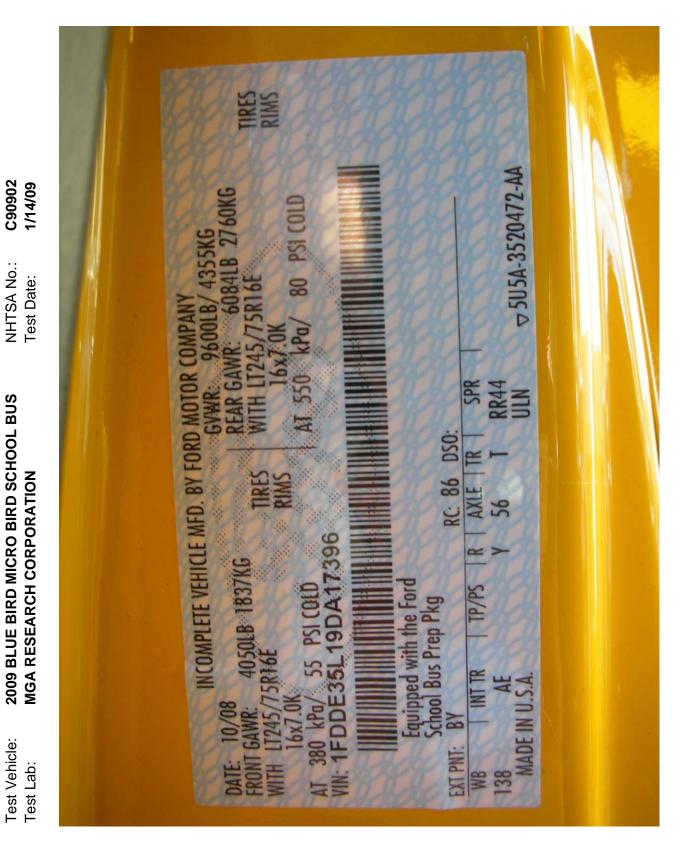


C90902 1/14/09	968	Ibs.	NER'S	MANUAL FOR		INFORMATION D	and the second	and the second		
NHTSA No.: C9 Test Date: 1/1	-ORMATION	REAR 1 D S REAR 1 D S RO	COLD TIRE PRESSURE	055 PSI	080 PSI	055 PŚI			-	
CHOOL BUS N	IC IN	argo should neve	COLD TIRE	379 KPA.	551 KPA.	379 KPA.				
2009 BLUE BIRD MICRO BIRD SCHOOL BUS MGA RESEARCH CORPORATION	TIRE AND	SEATING CAPACITY TOTAL 17 FRONT 1 REAK 15 SEATING CAPACITY TOTAL 47 FRONT 1 REAK 15	TIRE SIZE	LT245/75R16E	LT245/75R16E	LT245/75R16E				
Test Vehicle: Test Lab:			TIRE	FRONT	REAR	SPARE				









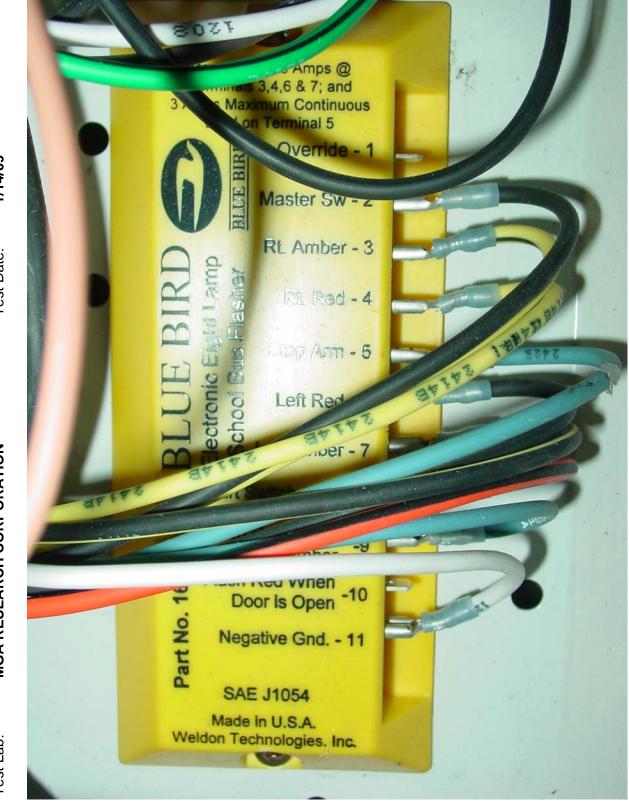

C90902 1/14/09 NHTSA No.: Test Date:

2009 BLUE BIRD MICRO BIRD SCHOOL BUS MGA RESEARCH CORPORATION

Test Vehicle: Test Lab: Flasher Unit