

**SAFETY COMPLIANCE TESTING FOR FMVSS 201  
Occupant Protection In Interior Impact  
Upper Interior Head Impact Protection**

**AUDI AG  
2009 Audi A4 Sedan  
NHTSA No. C95802**

**MGA RESEARCH CORPORATION  
446 Executive Drive  
Troy, Michigan 48083**




Test Dates: May 13-14, 2009  
Report Date: May 15, 2009


**FINAL REPORT**


PREPARED FOR:

**U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
ENFORCEMENT  
OFFICE OF VEHICLE SAFETY COMPLIANCE  
1200 New Jersey Avenue, SE  
West Building  
WASHINGTON, D.C. 20590**

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By:   
\_\_\_\_\_  
Donald J. Whiteside, Project Engineer

  
\_\_\_\_\_  
Helen A. Kaleto, Project Manager

Approved By:   
\_\_\_\_\_

Approval Date: May 15, 2009

FINAL REPORT ACCEPTANCE BY OVSC:

Accepted By: \_\_\_\_\_

Acceptance Date: \_\_\_\_\_

**TECHNICAL REPORT STANDARD TITLE PAGE**

1. Report No. 201UI-MGA-09-05		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 201 Compliance Testing of a 2009 Audi A4 Sedan, NHTSA No. C95802				5. Report Date May 15, 2009	
				6. Performing Organization Code MGA	
7. Author(s) Helen A. Kaleto, Project Manager Donald J. Whiteside, Project Engineer				8. Performing Organization Report No. 201UI-MGA-09-05	
9. Performing Organization Name and Address MGA Research Corporation 446 Executive Drive Troy, Michigan 48083				10. Work Unit No.	
				11. Contract or Grant No. DTNH22-04-C-11027	
12. Sponsoring Agency Name and Address U.S. Department Of Transportation National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance 1200 New Jersey Avenue, SE West Building, 4 <sup>th</sup> Floor Washington, D.C. 20590				13. Type of Report and Period Covered Final Test Report	
				14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes					
16. Abstract A compliance test series was conducted on the subject 2009 Audi A4 Sedan, NHTSA No. C95802, in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-201U-01 for the determination of FMVSS 201 compliance. The testing was conducted at MGA Research Corporation in Troy, Michigan on May 13-14, 2009. Test failures identified were as follows:  None  The data recorded indicates that the 2009 Audi A4 Sedan tested appears to comply with the upper interior requirements of FMVSS 201.					
17. Key Words Compliance Testing Safety Engineering FMVSS 201UI 2009 Audi A4 Sedan				18. Distribution Statement Copies of this report are available from: NHTSA Technical Reference Division, Mail Code: NPO-410 1200 New Jersey Avenue, SE West Building Washington, D.C. 20590	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 168	22. Price N/A

## TABLE OF CONTENTS

<b><u>SECTION</u></b>	<b><u>DESCRIPTION</u></b>	<b><u>PAGE NO.</u></b>
<b>1.0</b>	<b>PURPOSE OF COMPLIANCE TEST</b>	<b>6</b>
<b>2.0</b>	<b>COMPLIANCE TEST DATA SUMMARY</b>	<b>7</b>
<b>3.0</b>	<b>TEST DATA (Including Acceleration and Velocity Plots)</b>	<b>24</b>
<b>4.0</b>	<b>TEST EQUIPMENT LIST AND CALIBRATION INFORMATION</b>	<b>121</b>
	4.1 Pre-Test Calibration FMH #35	
	4.2 Post-Test Calibration FMH #35	
	4.3 Pre-Test Calibration FMH #37	
	4.4 Post-Test Calibration FMH #37	
	4.5 Pre-Test Calibration FMH #38	
	4.6 Post-Test Calibration FMH #38	
<b>5.0</b>	<b>PHOTOGRAPHS</b>	<b>141</b>
	Appendix A - Temperature Trace	150
	Appendix B - Calibration Certificates	151

**LIST OF TABLES**

<b><u>TABLE</u></b>	<b><u>DESCRIPTION</u></b>	<b><u>PAGE NO</u></b>
2-1	SUMMARY TABLE OF TEST RESULTS	8
2-2	GENERAL TEST AND VEHICLE PARAMETER DATA	10
2-3	HORIZONTAL IMPACT ANGLE RANGE FOR A- AND B-PILLARS	14
2-4	VERTICAL IMPACT ANGLE RANGES	15
2-5	TARGET MEASUREMENTS	18
2-6	SUMMARY OF TARGETING RESULTS	21
4-1	LIST OF ITEMS USED	121
4-2	FMH CALIBRATION SUMMARY	122

## **1.0 PURPOSE OF COMPLIANCE TEST**

The purpose of this head impact compliance test was to determine whether the subject vehicle, a 2009 Audi A4 Sedan, met the performance requirements of FMVSS 201, Occupant Protection in Interior Impact - Upper Interior Head Impact Protection.

Tests were conducted on May 13-14, 2009 on a 2009 Audi A4 Sedan, manufactured by Audi AG.

All tests were conducted in accordance with the U. S. Department of Transportation, National Highway Traffic Safety Administration's Laboratory Test Procedure TP-201U-01 dated April 3, 1998 and the corresponding MGA Research Corporation's FMVSS 201U procedure number MGATP201U\_FRAME#2 dated July 1, 2005.

All tests were conducted at MGA Research Corporation in Troy, Michigan and were performed by MGA engineers and technicians. The FMVSS 201U impactor test machine was used to conduct the testing. Target locations were determined by using a Coordinate Measurement Machine in conjunction with the MGA EZ-Target™ program and MGA procedure MGATP201U\_Test Series dated July 1, 2005.

## 2.0 COMPLIANCE TEST DATA SUMMARY

The 2009 Audi A4 Sedan was equipped with A, B, O (Other), and rear-pillars, an adjustable seat belt anchorage on each B-pillar, grab handles located on the side rail above the front and rear driver and passenger doors, a sunroof, and an overhead console located on the front upper roof.

Upon completion of targeting the test vehicle, twelve (12) targets were chosen to be impacted based upon engineering judgment and certification test data provided by the manufacturer. Per NHTSA request, all testing was to be contained to the right side of the vehicle (allowing for viability of future tests). The twelve (12) targets chosen were:

AP1	OP1	SR3-1	UR2@Sunroof Passenger Side
AP3	OP2	RH	UR4@BPR
BP2	FH1	UR1@Sunroof Front	UR5@SR3-2

The 2009 Audi A4 Sedan, tested appears to comply with the upper interior performance criteria for FMVSS 201. The HIC(d) measured using the Part 572L (Free Motion Headform) was below 1000 for each tested component.

TABLE 2-1

SUMMARY TABLE OF TEST RESULTS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Audi A4 Sedan

VEH. NHTSA NO.: C95802 VIN: WAULF78KX9A139146 COLOR: Silver


VEH. BUILD DATE: October, 2008 TEST DATES: May 13-14, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

TARGET	VEHICLE SIDE	HORIZONTAL ANGLE (deg)	VERTICAL ANGLE (deg)	VELOCITY (kph)	HIC(d)	FMH HIC	IMPACT ON FMH (mm)	
							Above	Left/Right
AP1	Right	107	32	19.2	626	609	24	8 Left
AP3	Right	157	40	19.1	350	244	23	7 Left
BP2	Right	90	6	23.4	615	595	16	2 Left
OP1	Right	90	23	23.8	536	490	43	5 Left
OP2	Right	90	4	23.9	594	566	23	4 Left
FH1	Right	180	50	23.9	629	614	6	4 Left
SR3-1	Right	90	48	19.2	313	195	33	7 Left
RH	Right	0	50	23.9	708	717	13	4 Right
UR1@Sunroof Front	Right	180	45	23.9	426	344	13	8 Left
UR2@Sunroof Passenger Side	Right	90	45	23.8	419	334	14	3 Right
UR4@BPR	Right	90	50	24.0	582	551	26	1 Left
UR5@SR3-2	Right	90	50	24.0	553	512	32	2 Right

Above and left/right refers to the position relative to reference pt. 0 where the target made contact with the Free Motion Headform. See the diagram below for details.





POST TEST COMMENTS:

The following description lists any post-test damage or other test observations for each target.

UR1@Sunroof Front Right: Deformation to headliner; large crack to plastic sunroof frame.

UR2@Sunroof Passenger Side Right: Deformation to headliner; slight deformation to the sunroof track.

REMARKS:

The targets listed were impacted in the following order:

Right: AP3, AP1, BP2, UR4@BPR, UR2@Sunroof Passenger Side, FH1,  
UR1@Sunroof Front, OP2, OP1, SR3-1, UR5@SR3-2, RH

The 150 mm rule was observed for targets horizontal to each other and the 200 mm rule was observed for vertical components.

RECORDED BY: Donald J. Whiteside

DATE: May 14, 2009

APPROVED BY: Helen A. Kaletto

TABLE 2-2

GENERAL TEST AND VEHICLE PARAMETER DATA

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Audi A4 Sedan

VEH. NHTSA NO.: C95802 VIN: WAULF78KX9A139146 COLOR: Silver

VEH. BUILD DATE: October, 2008 TEST DATES: May 13-14, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

INTERIOR TRIM INFORMATION: A, B, O (Other), and rear-pillars, an adjustable seat belt anchorage on each B-pillar, grab handles located on the side rail above the front and rear driver and passenger doors, a sunroof, and an overhead console located on the front upper roof.

SUNROOF INFORMATION:

Installed:  Yes  No

Operation:  Electric  Manual

SIDE RAIL CURTAIN AIRBAG INFORMATION:

Installed:  Yes  No

ROLL-BAR INFORMATION:

Installed:  Yes  No

Padded:  Yes  No

Braces:  Yes  No

GENERAL INFORMATION:

Date Received: March 3, 2009; Odometer Reading 18 miles

DATA FROM VEHICLE'S CERTIFICATION LABEL:

Vehicle Manufactured By: Audi AG

Date of Manufacture: October, 2008; VIN: WAULF78KX9A139146

GVWR: 2225 kg; GAWR FRONT: 1125 kg;

GAWR REAR: 1150 kg;

DATA FROM TIRE PLACARD:

Tire Pressure with Maximum Capacity Vehicle Load:

FRONT: 240 kPa REAR: 250 kPa

Recommended Tire Size: 225/50R17

Recommended Cold Tire Pressure:

FRONT: 240 kPa REAR: 250 kPa

Size of Tire on Test Vehicle: 225/50R17

Type of Spare Tire: T125/70R19; Space Saver: X; Standard    

VEHICLE CAPACITY DATA:

Type of Front Seats: Bench    ; Bucket   X; Split Bench    

Number of Occupants: Front   2; Rear   3; TOTAL   5

VEHICLE CAPACITY WEIGHT:

Vehicle Capacity Weight (VCW) =   480 kg

No. of Occupants x 68 kg =   340 kg

Rated Cargo/Luggage Weight (RCLW) =   120 kg (difference)

WEIGHT OF TEST VEHICLE AS DELIVERED AT LABORATORY: (with maximum fluids)

Right Front =   455.0 kg Right Rear =   368.5 kg

Left Front =   470.0 kg Left Rear =   374.5 kg

TOTAL FRONT =   925.0 kg TOTAL REAR =   743.0 kg

% Total Weight =   55.5 % % Total Weight =   44.5 %

TOTAL DELIVERED WEIGHT =  1668.0 kg

CALCULATION OF VEHICLE'S TARGET TEST WEIGHT:

Total Delivered Weight =  1668.0 kg

Max. Test Cargo/Luggage Weight =   120.0 kg

Target Test Weight =  1788.0 kg

WEIGHT OF TEST VEHICLE FULLY LOADED:

Right Front =	<u>449.5</u> kg	Right Rear =	<u>439.5</u> kg
Left Front =	<u>464.0</u> kg	Left Rear =	<u>435.0</u> kg
TOTAL FRONT =	<u>913.5</u> kg	TOTAL REAR =	<u>874.5</u> kg
% Total Weight =	<u>51.1</u> %	% Total Weight =	<u>48.9</u> %

TOTAL TEST WEIGHT = 1788.0 kg

Weight of ballast secured in vehicle's cargo area = 120.0 kg

TEST VEHICLE ATTITUDE:

AS DELIVERED: Right Front 702 mm; Left Front 701 mm;  
Right Rear 702 mm; Left Rear 700 mm;  
Pitch Angle at Right Door Sill = 0.2 Front is higher  
Pitch Angle at Left Door Sill = 0.1 Front is higher  
Roll Angle at Front Bumper = 0.1 Right is higher  
Roll Angle at Rear Bumper = 0.1 Right is higher

FULLY LOADED: Right Front 704 mm; Left Front 702 mm;  
Right Rear 676 mm; Left Rear 676 mm;  
Pitch Angle at Right Door Sill = 0.8 Front is higher  
Pitch Angle at Left Door Sill = 0.7 Front is higher  
Roll Angle at Front Bumper = 0.0  
Roll Angle at Rear Bumper = 0.2 Right is higher

AS TARGETED: Right Front 881 mm; Left Front 881 mm;  
Right Rear 882 mm; Left Rear 881 mm;  
Pitch Angle at Right Door Sill = 0.2 Front is higher  
Pitch Angle at Left Door Sill = 0.2 Front is higher  
Roll Angle at Front Bumper = 0.0  
Roll Angle at Rear Bumper = 0.1 Right is higher

AS TESTED ON RIGHT SIDE:

Pitch Angle at Right Door Sill = 0.2 Front is higher  
Pitch Angle at Left Door Sill = 0.2 Front is higher  
Roll Angle at Front Bumper = 0.1 Right is higher  
Roll Angle at Rear Bumper = 0.1 Right is higher

AS TESTED ON LEFT SIDE:

Pitch Angle at Right Door Sill = N/A  
Pitch Angle at Left Door Sill = N/A  
Roll Angle at Front Bumper = N/A  
Roll Angle at Rear Bumper = N/A

VEHICLE WHEELBASE = 2795 mm

REMARKS: The seat travel distance was measured to be 256 mm for the driver front seat and 256 mm for the passenger front seat.

RECORDED BY: Donald J. Whiteside

DATE: May 5, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-3  
HORIZONTAL IMPACT ANGLE RANGE FOR A AND B PILLARS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Audi A4 Sedan

VEH. NHTSA NO.: C95802 VIN: WAULF78KX9A139146 COLOR: Silver

VEH. BUILD DATE: October, 2008 TEST DATES: May 13-14, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

HORIZONTAL IMPACT ANGLE RANGE FOR A AND B PILLARS

	HORIZONTAL ANGLE SPECIFIED RANGE	MINIMUM HORIZONTAL ANGLE	MAXIMUM HORIZONTAL ANGLE
A-PILLAR	L 195°-255°	L 203.2°	L 252.7°
	R 105°-165°	R 107.1°	R 157.4°
B-PILLAR	L 195°-345°	L 202.2°	L 284.4°
	R 15°-165°	R 76.0°	R 157.9°

AS DETERMINED USING THE PROCEDURES SPECIFIED IN S8.13.4.1

REMARKS:

RECORDED BY: Donald J. Whiteside

DATE: May 5, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-4

VERTICAL IMPACT ANGLE RANGES

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Audi A4 Sedan

VEH. NHTSA NO.: C95802 VIN: WAULF78KX9A139146 COLOR: Silver

VEH. BUILD DATE: October, 2008 TEST DATES: May 13-14, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

VERTICAL IMPACT ANGLE RANGES

		VERTICAL ANGLE SPECIFIED RANGE		MINIMUM VERTICAL ANGLE		MAXIMUM VERTICAL ANGLE	
FRONT HEADER	FH1	L	0°-50°	L	0°	L	50°
		R	0°-50°	R	0°	R	50°
	FH2	L	0°-50°	L	0°	L	50°
		R	0°-50°	R	0°	R	50°
SIDE RAIL	SR1	L	0°-50°	L	0°	L	43°
		R	0°-50°	R	0°	R	42°
	SR2A	L	0°-50°	L	0°	L	48°
		R	0°-50°	R	0°	R	48°
	SR2B	L	0°-50°	L	0°	L	48°
		R	0°-50°	R	0°	R	48°
	SR3-1	L	0°-50°	L	0°	L	48°
		R	0°-50°	R	0°	R	48°
	SR3-2	L	0°-50°	L	0°	L	46°
		R	0°-50°	R	0°	R	46°
	SR3-3	L	0°-50°	L	0°	L	20°
		R	0°-50°	R	0°	R	20°

		VERTICAL ANGLE SPECIFIED RANGE		MINIMUM VERTICAL ANGLE		MAXIMUM VERTICAL ANGLE	
REAR HEADER	RH	L	0°-50°	L	0°	L	50°
		R	0°-50°	R	0°	R	50°
A-PILLAR	AP1	L	-5°-50°	L	-5°	L	32°
		R	-5°-50°	R	-5°	R	32°
	AP2	L	-5°-50°	L	-5°	L	50°
		R	-5°-50°	R	-5°	R	50°
	AP3	L	-5°-50°	L	-5°	L	40°
		R	-5°-50°	R	-5°	R	40°
B-PILLAR	BP1	L	-10°-50°	L	-10°	L	28°
		R	-10°-50°	R	-10°	R	27°
	BP2*	L	0°-50°	L	0°	L	5°
		R	0°-50°	R	0°	R	6°
	BP3*	L	0°-50°	L	0°	L	3°
		R	0°-50°	R	0°	R	3°
	BP4	L	-10°-50°	L	-10°	L	0°
		R	-10°-50°	R	-10°	R	1°
OTHER-PILLAR	OP1	L	-10°-50°	L	-10°	L	22°
		R	-10°-50°	R	-10°	R	23°
	OP2	L	-10°-50°	L	-10°	L	4°
		R	-10°-50°	R	-10°	R	4°
REAR PILLAR	RP1	L	-10°-50°	L	-10°	L	22°
		R	-10°-50°	R	-10°	R	21°
	RP2	L	-10°-50°	L	-10°	L	28°
		R	-10°-50°	R	-10°	R	28°
UPPER ROOF 1		0°-50°		0°		45°	
UPPER ROOF 2		0°-50°		0°		45°	
UPPER ROOF 3		0°-50°		0°		45°	



	<b>VERTICAL ANGLE SPECIFIED RANGE</b>	<b>MINIMUM VERTICAL ANGLE</b>	<b>MAXIMUM VERTICAL ANGLE</b>
UPPER ROOF 4	0°-50°	0°	50°
UPPER ROOF 5	0°-50°	0°	50°
UPPER ROOF 6	0°-50°	0°	45°

As determined using the Procedures specified in S8.13.4.2. \*Targets BP2 and BP3 are seat belt anchorage locations.

RECORDED BY: Donald J. Whiteside

DATE: May 5, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-5

TARGET MEASUREMENTS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Audi A4 Sedan

VEH. NHTSA NO.: C95802 VIN: WAULF78KX9A139146 COLOR: Silver

VEH. BUILD DATE: October, 2008 TEST DATES: May 13-14, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

Measurement	Description	Left Side	Right Side
M	Seat Fore/Aft Travel (Front seats)	256 mm	256 mm
T°	Horizontal < {CG-F1 (Left Seat) to (Right A-Pillar)}	107.3°	--
A1°	360° - T°	252.7°	--
W°	Horizontal < {CG-2 (Left Seat) to (Left A-Pillar)}	203.2°	--
A2°	A2° = W°	203.2°	--
U°	Horizontal < {CG-2 (Left Seat) to (Left B-Pillar)}	284.4°	--
B1°	B1° = U°	284.4°	--
V°	Horizontal < {CG-R (Left Seat) to (Left B-Pillar)}	202.2°	--
B2°	B2° = V°	202.2°	--
W° (right)	Horizontal < {CG-F2 (Right Seat) to (Right A-Pillar)}	--	157.4°
A1° (right)	A1° (right) = W° (right)	--	157.4°
T ° (right)	Horizontal < {CG-F1 (Right Seat) to (Left A-Pillar)}	--	252.9°
A2° (right)	360°-T° (right)	--	107.1°
V ° (right)	Horizontal < {CG-R (Right Seat) to (Right B-Pillar)}	--	157.9°
B1° (right)	B1° (right) = V° (right)	--	157.9°
U ° (right)	Horizontal < {CG-F2 (Right Seat) to (Right B-Pillar)}	--	76.0°
B2° (right)	B2° (right) = U° (right)	--	76.0°
J	A-Pillar {(Plane 3) – (Plane 5)}	322.1 mm	321.1 mm
J/2	J ÷ 2	161.1 mm	160.6 mm
D1	Upper Roof {(Plane A) – (Plane B)}	1626.5 mm	
D1/2	D1 ÷ 2	813.3 mm	

Measurement	Description	Left Side	Right Side
D2	Upper Roof {(Plane C) – (Plane D)}	1164.2 mm	
D2/2	D2 ÷ 2	582.1 mm	
.35D1	.35 x D1	569.3 mm	
.35D2	.35 x D2	407.5 mm	
N	B-Pillar {(BPR) – (lowest point on daylight opening forward of B-Pillar)}	375.4 mm	379.5 mm
N/2	B-Pillar {(BP3) – (lowest point on daylight opening forward of B-Pillar)}	187.7 mm	189.8 mm
N/4	B-Pillar {(BP4) – (lowest point on daylight opening forward of B-Pillar)}	93.9 mm	94.9 mm
Q	O-Pillar (Plane 13-Plane14)	344.3 mm	342.6 mm
Q/2	Q / 2	172.2 mm	171.3 mm
D	R-Pillar (Point 7 – Point M)	710 mm	710 mm
3D/7	3*D / 7	304.3 mm	304.3 mm

As determined using the Procedures specified in S10.1-10.13.

SgRP Locations (world coordinates)						
	Left (mm)			Right (mm)		
	x	y	z	x	y	z
Front	1274.0	-365.0	186.0	1274.0	365.0	186.0
Rear	2093.0	-345.0	191.0	2093.0	345.0	191.0

SgRP Locations (vehicle coordinates)						
	Left (mm)			Right (mm)		
	x	y	z	x	y	z
Front	1274.0	-365.0	186.0	1274.0	365.0	186.0
Rear	2093.0	-345.0	191.0	2093.0	345.0	191.0

<b>CG Locations (world coordinates)</b>						
	Left (mm)			Right (mm)		
	x	y	z	x	y	z
CGF1	1178.0	-365.0	846.0	1178.0	365.0	846.0
CGF2	1434.0	-365.0	846.0	1434.0	365.0	846.0
CGR	2253.0	-345.0	851.0	2253.0	345.0	851.0

REFERENCE FOR VEHICLE COORDINATE SYSTEM (measured in millimeters):

Front passenger seat rear outboard seat anchor hole (x, y, z) = 1316.5, 635.0, -52.3

Front driver seat rear outboard seat anchor hole (x, y, z) = 1316.5, -635.0, -52.3

Front driver seat front outboard seat anchor hole (x, y, z) = 952.9, -635.0, -20.4

REMARKS:

RECORDED BY: Donald J. Whiteside

DATE: May 5, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-6

SUMMARY OF TARGETING RESULTS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Audi A4 Sedan

VEH. NHTSA NO.: C95802 VIN: WAULF78KX9A139146 COLOR: Silver

VEH. BUILD DATE: October, 2008 TEST DATES: May 13-14, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

SUMMARY OF TARGETING RESULTS								
Target	Location (mm)			Horizontal Angle (deg)	Vertical Angle (deg)	Relocation (Yes/No)	Extension (# of 25 mm Spheres)	Impact (Yes/No)
	x	y	z					
<b>A-Pillar Left Side</b>								
AP1	1047.8	-521.3	969.3	--	--	Yes	--	--
REL	1084.9	-544.7	937.4	252	32	--	2	No
AP2	966.7	-575.0	882.0	203	50	No	--	No
AP3	815.0	-605.9	808.5	203	40	No	--	No
<b>A-Pillar Right Side</b>								
AP1	1046.3	523.5	962.3	--	--	Yes	--	--
REL	1078.7	545.7	932.9	107	32	--	2	Yes
AP2	954.1	577.4	874.2	157	50	No	--	No
AP3	810.8	606.7	802.0	157	40	No	--	Yes
<b>B-Pillar Left Side</b>								
BP1	1580.9	-454.4	1009.5	270	28	No	--	No
BP2	1532.3	-603.7	801.8	270	5	No	--	No
BP3	1513.6	-598.6	821.1	284	3	No	--	No
BP4	1605.5	-654.0	727.1	202	0	No	--	No
<b>B-Pillar Right Side</b>								
BP1	1583.7	455.7	1008.7	90	27	No	--	No
BP2	1527.0	605.1	797.5	90	6	No	--	Yes
BP3	1509.8	601.0	818.4	157	3	No	--	No
BP4	1601.2	655.7	723.6	76	1	No	--	No

<b>SUMMARY OF TARGETING RESULTS</b>								
<b>Target</b>	<b>Location (mm)</b>			<b>Horizontal Angle (deg)</b>	<b>Vertical Angle (deg)</b>	<b>Relocation (Yes/No)</b>	<b>Extension (# of 25 mm Spheres)</b>	<b>Impact (Yes/No)</b>
	<b>x</b>	<b>y</b>	<b>z</b>					
<b>Other Pillar Left Side</b>								
OP1	2229.2	-435.6	1010.8	270	22	No	--	No
OP2	2310.8	-592.8	838.5	--	--	Yes	--	--
REL	2296.9	-584.3	824.1	270	4	--	1	No
<b>Other Pillar Right Side</b>								
OP1	2227.2	438.3	1008.8	90	23	No	--	Yes
OP2	2309.7	594.2	837.7	--	--	Yes	--	--
REL	2289.7	589.6	827.3	90	4	--	1	Yes
<b>Rear Pillar Left Side</b>								
RP1	2384.1	-484.7	935.4	305	22	No	--	No
RP2	2511.3	-578.3	785.7	--	--	Yes	--	--
REL	2467.6	-514.1	875.8	285	28	--	5	No
<b>Rear Pillar Right Side</b>								
RP1	2381.3	485.0	939.8	55	21	No	--	No
RP2	2502.1	578.4	790.4	--	--	Yes	--	--
REL	2465.0	517.2	884.0	75	28	--	5	No
<b>Front Header Left Side</b>								
FH1	982.3	-409.6	983.3	180	50	No	--	No
FH2	966.4	-262.9	990.9	180	50	No	--	No
<b>Front Header Right Side</b>								
FH1	982.4	406.1	982.2	180	50	No	--	Yes
FH2	966.6	260.0	989.5	180	50	No	--	No
<b>Side Rail Left Side</b>								
SR1	1196.9	-501.6	999.5	--	--	Yes	--	--
REL	1215.5	-491.5	979.8	270	43	--	1	No
SR2A	1347.2	-495.6	1012.2	--	--	Yes	--	--
REL	1381.9	-472.5	998.0	270	48	--	2	No
SR2B	1280.7	-496.3	1009.2	--	--	Yes	--	--
REL	1286.2	-523.9	972.3	270	48	--	2	No

<b>SUMMARY OF TARGETING RESULTS</b>								
Target	Location (mm)			Horizontal Angle (deg)	Vertical Angle (deg)	Relocation (Yes/No)	Extension (# of 25 mm Spheres)	Impact (Yes/No)
	x	y	z					
SR3-1	1844.3	-459.7	1001.5	270	48	No	--	No
SR3-2	2007.7	-463.9	994.9	270	46	No	--	No
SR3-3	2378.8	-492.9	931.1	270	20	No	--	No
<b>Side Rail Right Side</b>								
SR1	1196.2	501.5	998.2	--	--	Yes	--	--
REL	1211.1	485.7	978.1	90	42	--	1	Yes
SR2A	1346.7	493.3	1011.9	--	--	Yes	--	--
REL	1383.6	466.5	998.2	90	48	--	2	No
SR2B	1284.4	497.1	1004.9	--	--	Yes	--	--
REL	1297.9	521.4	967.0	90	48	--	2	No
SR3-1	1842.9	462.9	998.8	90	48	No	--	Yes
SR3-2	2007.8	466.1	993.0	90	46	No	--	No
SR3-3	2376.6	491.5	931.6	90	20	No	--	No
<b>Rear Header Left Side</b>								
RH	2379.4	-345.8	998.0	0	50	No	--	No
<b>Rear Header Right Side</b>								
RH	2379.8	344.1	998.6	0	50	No	--	Yes
<b>Upper Roof Right Side</b>								
UR1@Sunroof Front	1241.9	258.0	1032.5	180	45	No	--	Yes
UR2@Sunroof Passenger Side	1448.6	339.4	1028.6	90	45	No	--	Yes
UR3@Sunroof Rear	1607.6	236.7	1029.1	0	45	No	--	No
UR4@BPR	1606.9	397.4	1015.7	90	50	No	--	Yes
UR5@SR3-2	2009.6	394.2	1006.2	90	50	No	--	Yes
UR6@RP	2260.2	394.2	1024.5	315	45	No	--	No


As determined using the Procedures specified in S10.1-10.13.

RECORDED BY: Donald J. Whiteside



DATE: May 5, 2009

APPROVED BY: Helen A. Kaletto

### 3.0 TEST DATA (Including Acceleration and Velocity Plots)

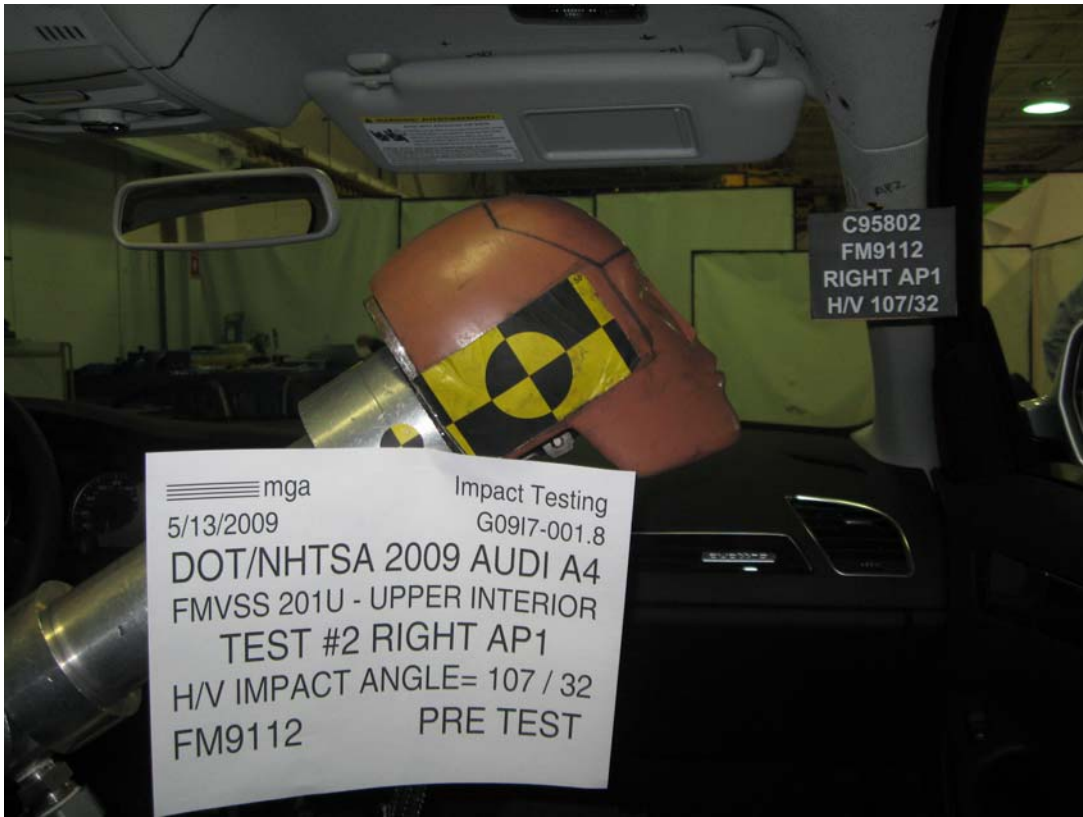



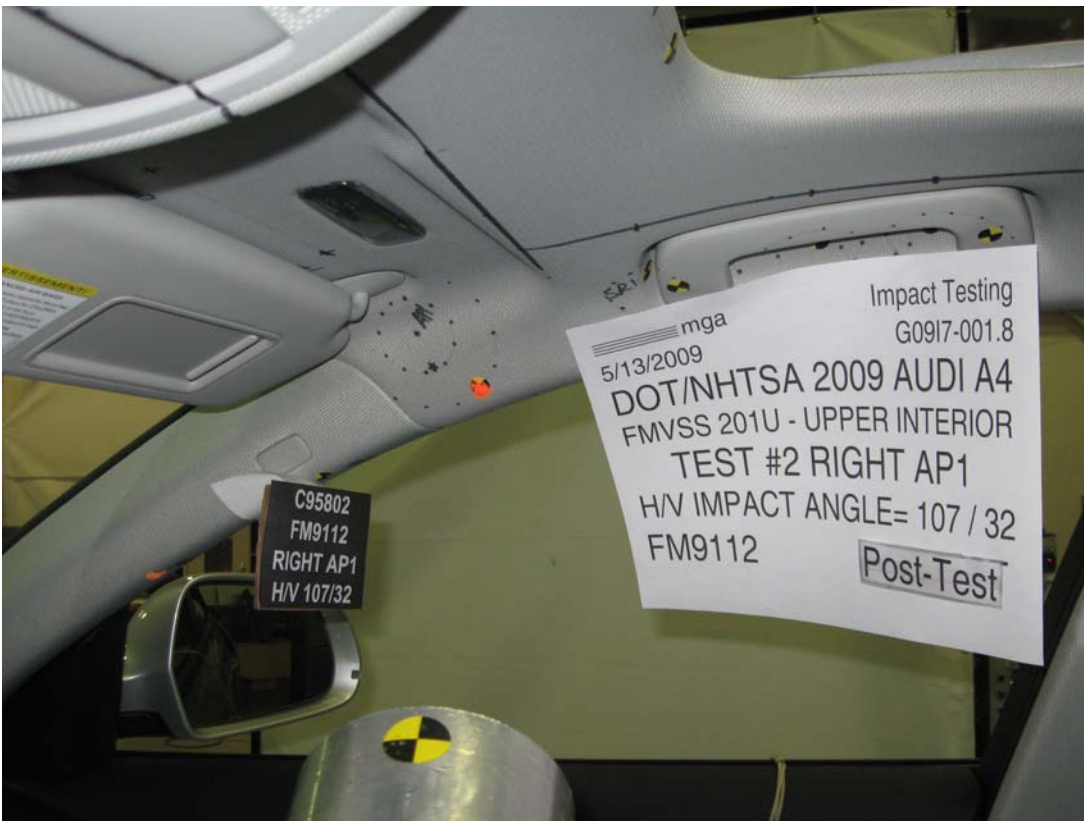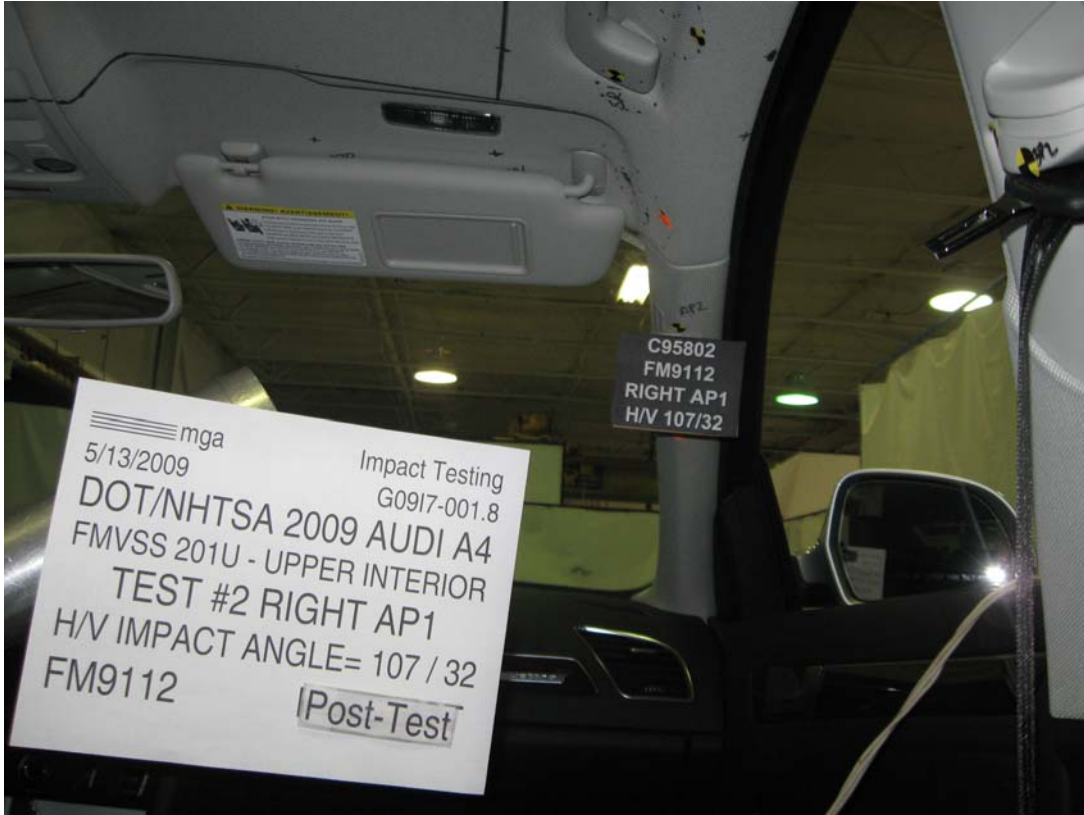



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#2

Target (Vehicle Side): AP1Right

Temperature:20.9C

MGA Test Reference No.:FM9112

Humidity:40.9%

Approach Horizontal Angles:107°

Time of Test:11:28:40 AM

Approach Vertical Angles:32°

FMH Serial No:[037]

Additional Description:Relocation Spheres: 2

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
626	609	3.2	19.2	24	8 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	AHTB2	-115.9	1.06	1.06
Y	6	J14103	93.7	0.85	0.85
Z	7	J35800	97.1	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/13/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9112


Target Location: API, Right Side


Test Date: 5/13/2009

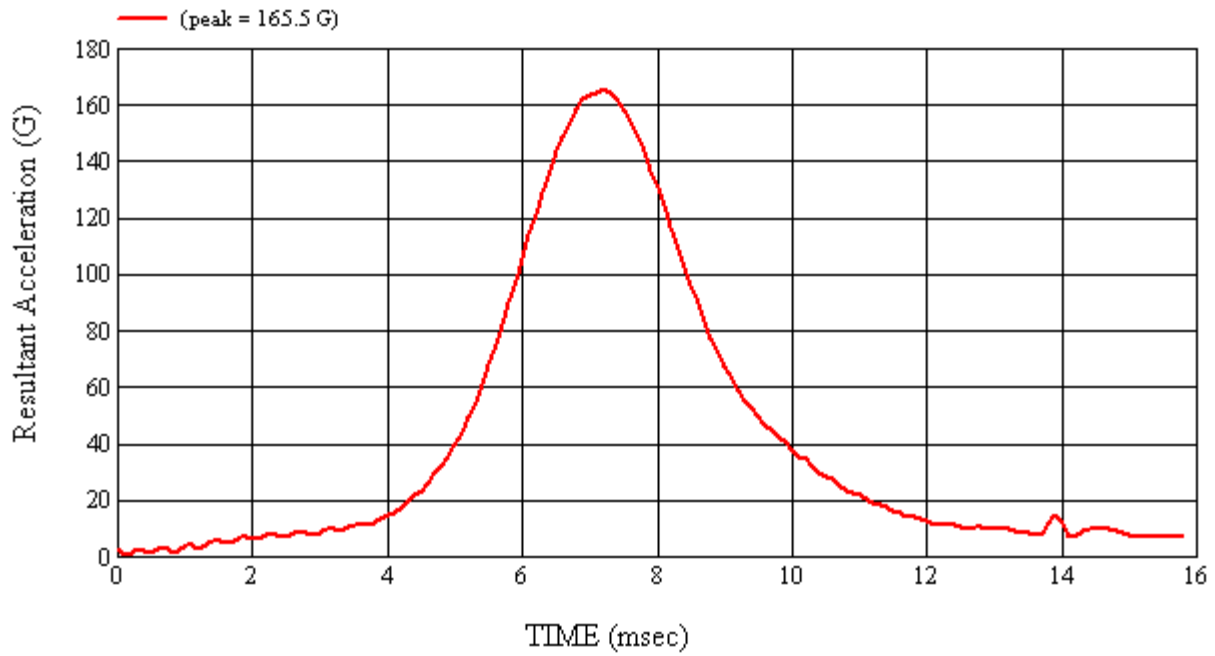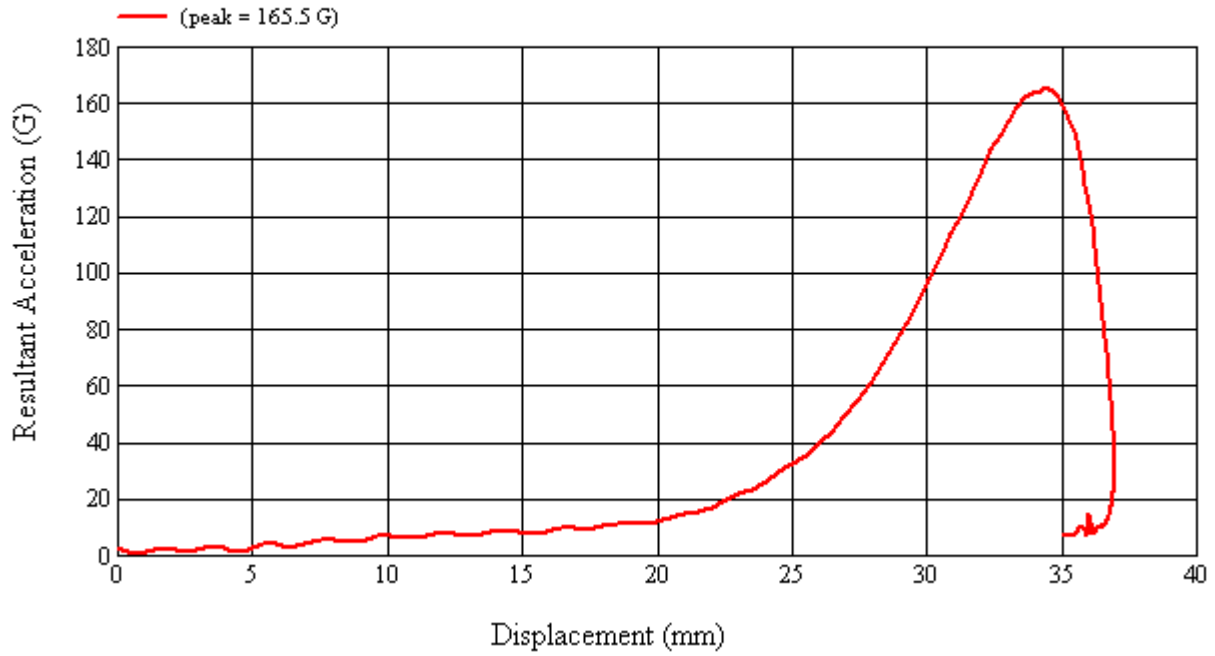

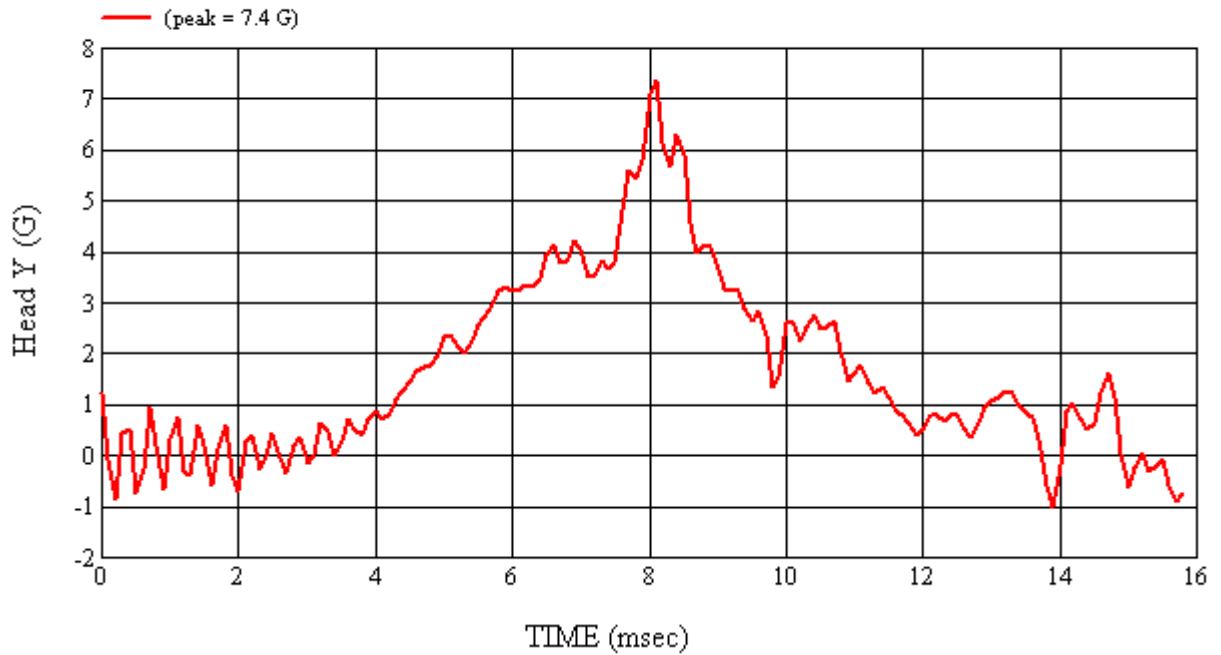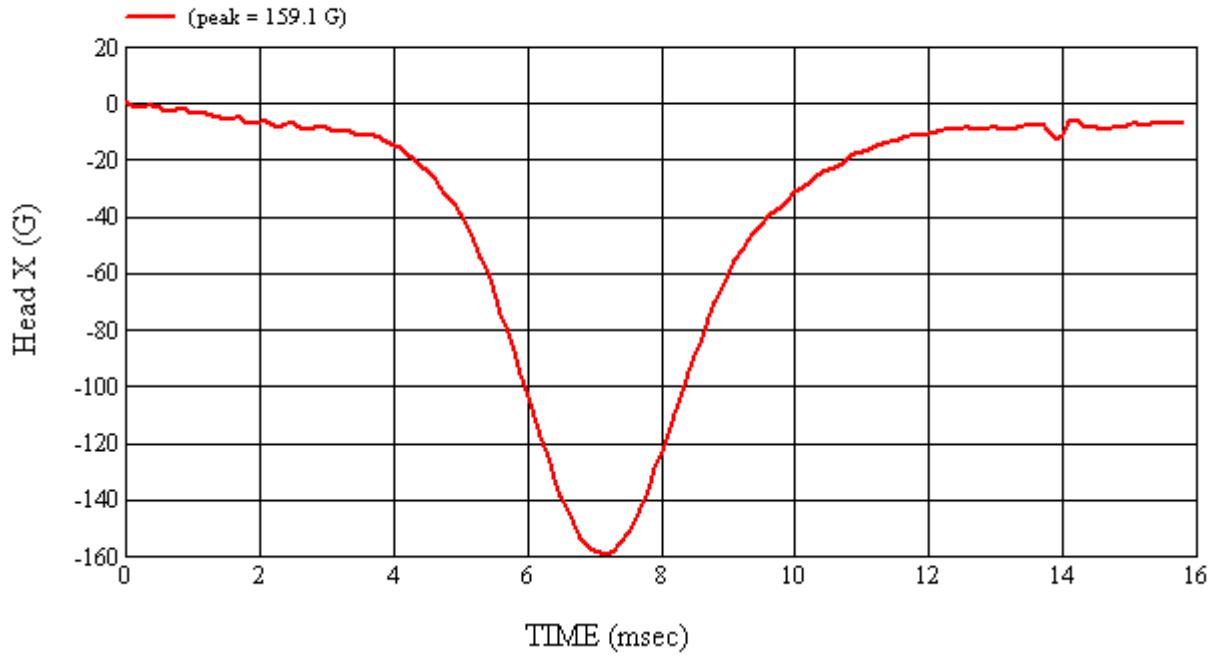


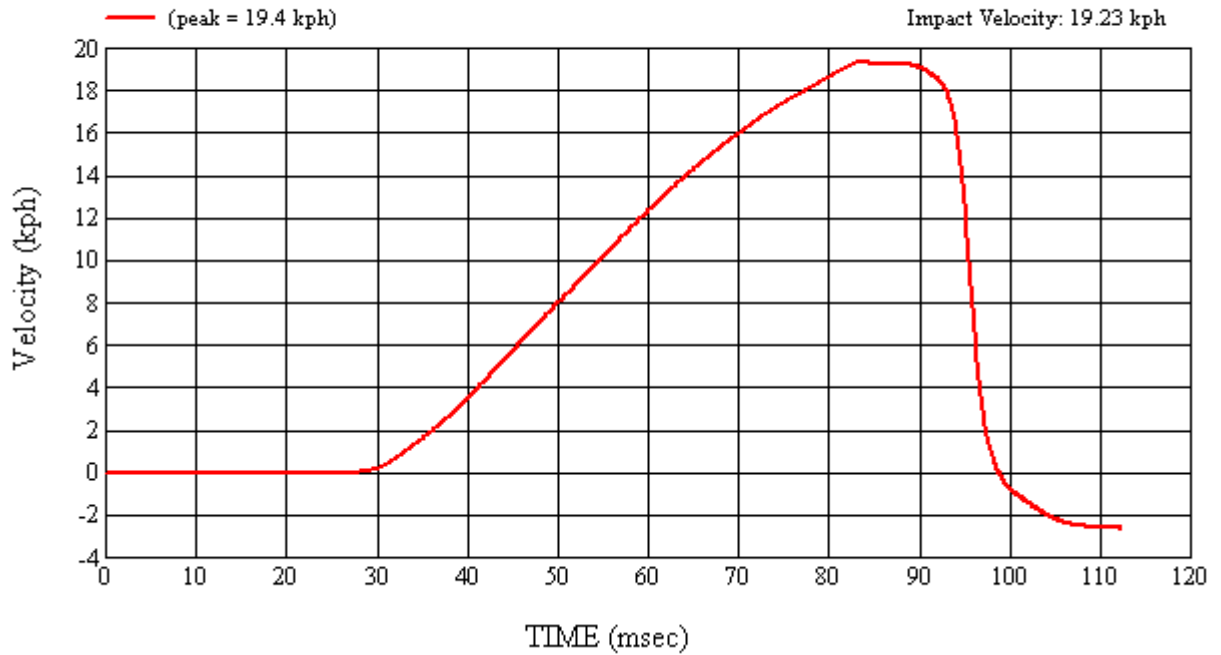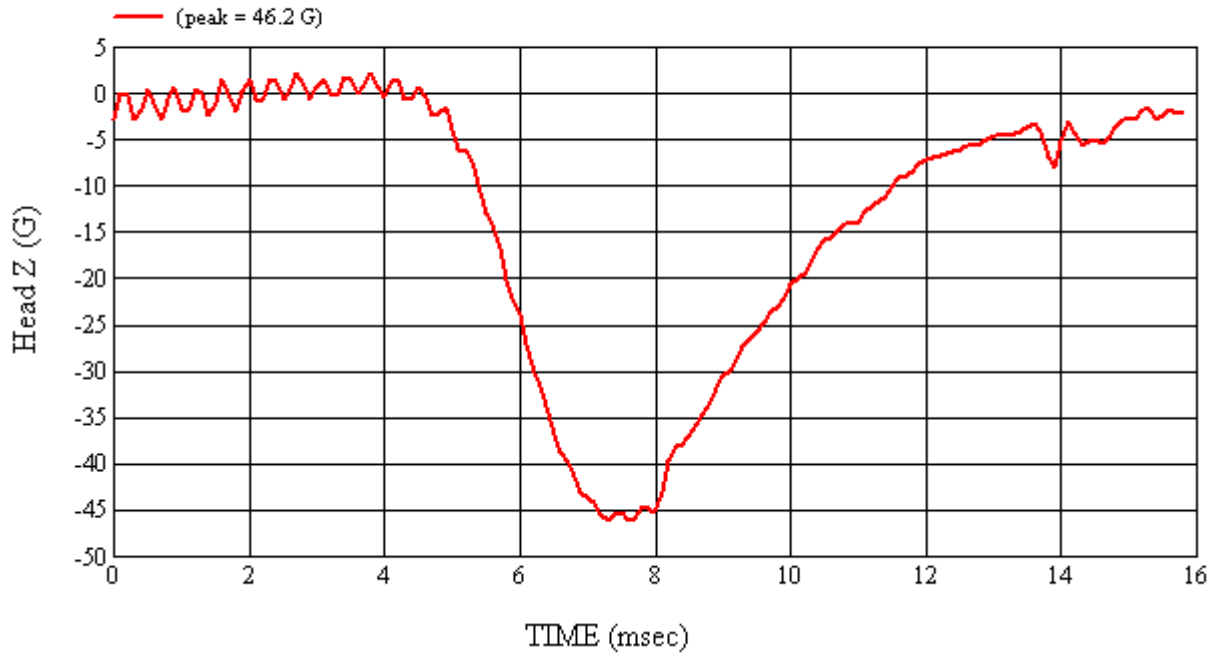

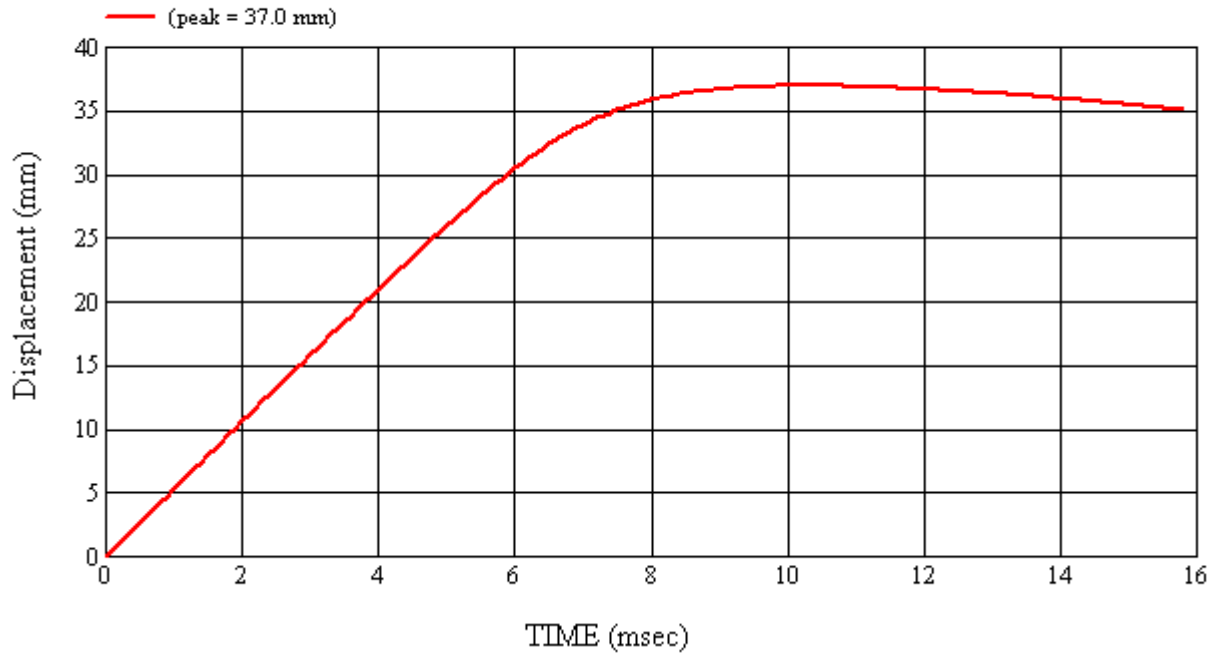

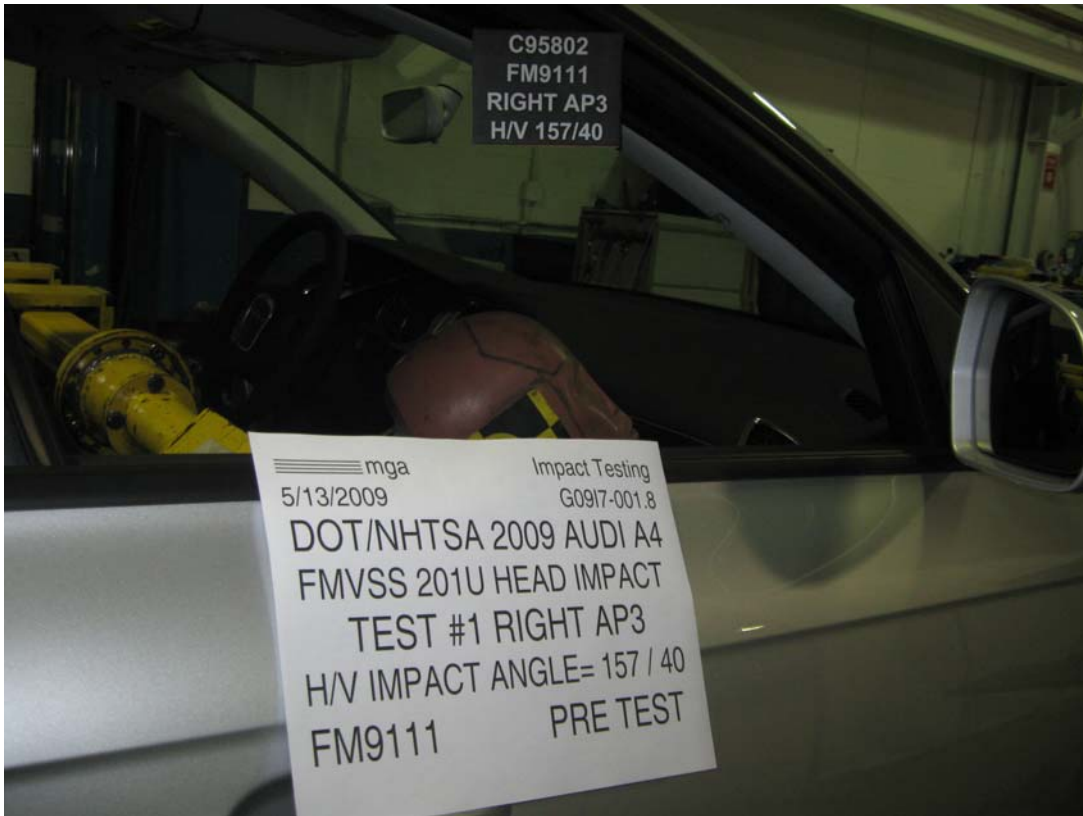



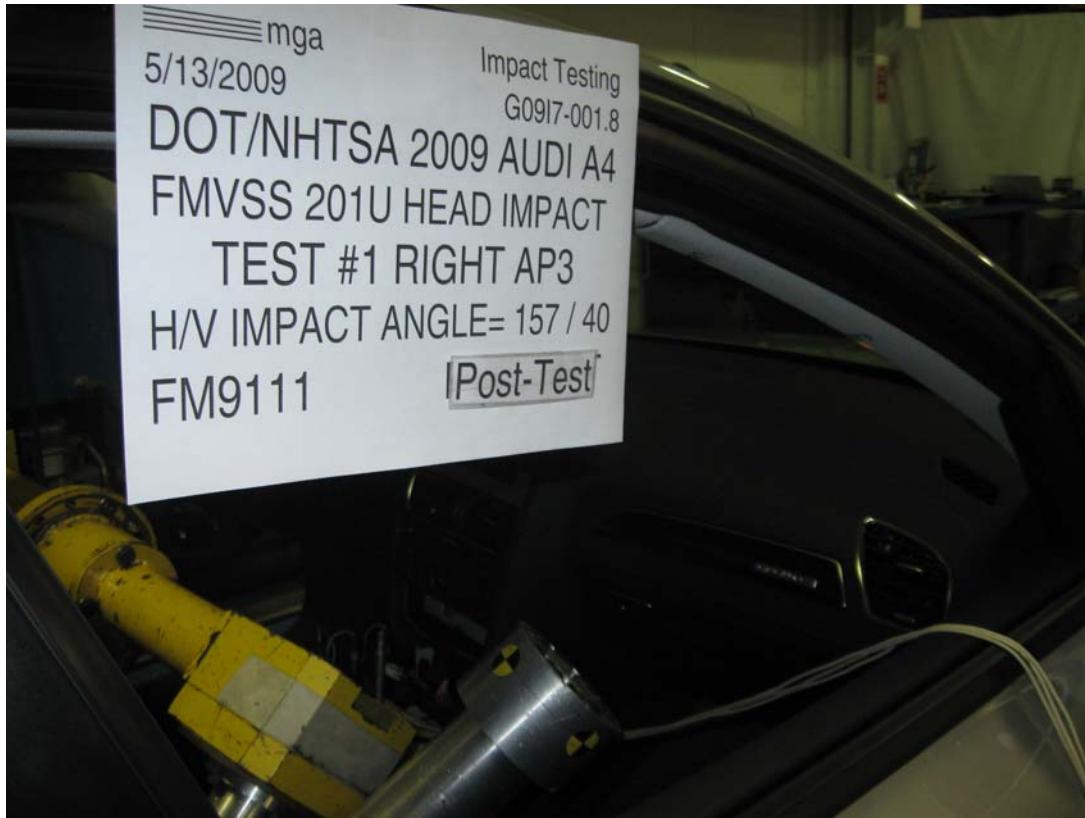



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#1

Target (Vehicle Side): AP3Right

Temperature:20.9C

MGA Test Reference No.:FM9111

Humidity:40.7%

Approach Horizontal Angles:157°

Time of Test:10:33:36 AM

Approach Vertical Angles:40°

FMH Serial No:[035]

Additional Description:

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
350	244	12.7	19.1	23	7 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J35919	-95.6	1.06	1.06
Y	6	J22664	94.3	0.85	0.85
Z	7	J35924	92.8	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/13/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9111


Target Location: AP3, Right Side


Test Date: 5/13/2009

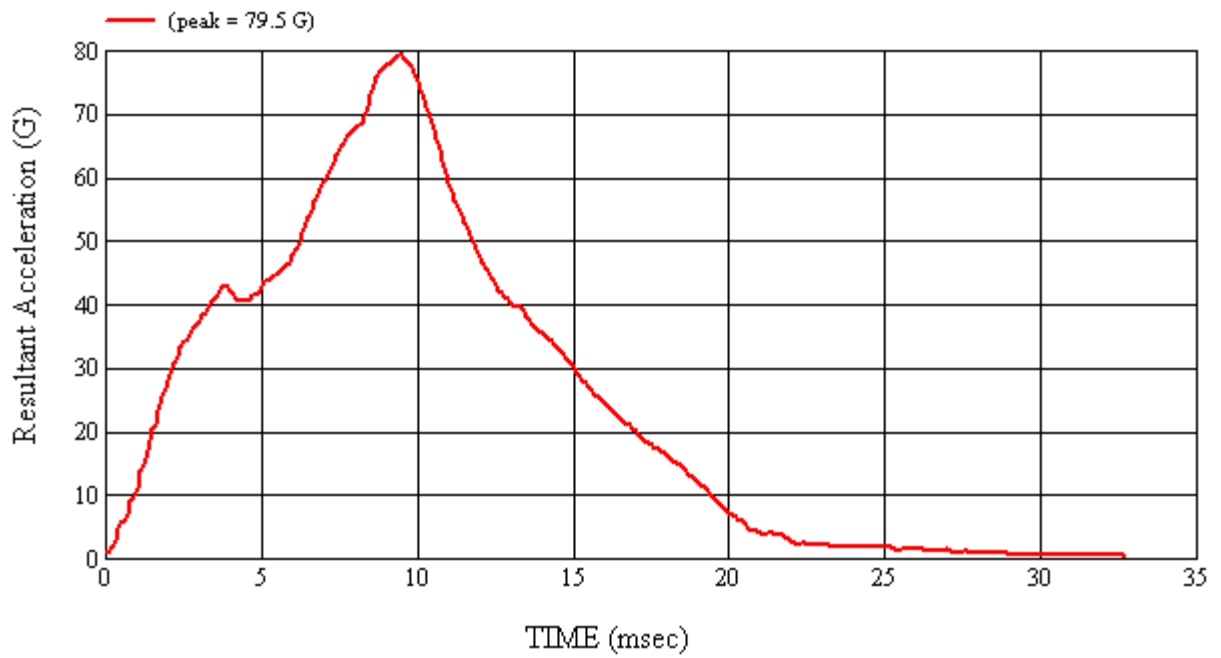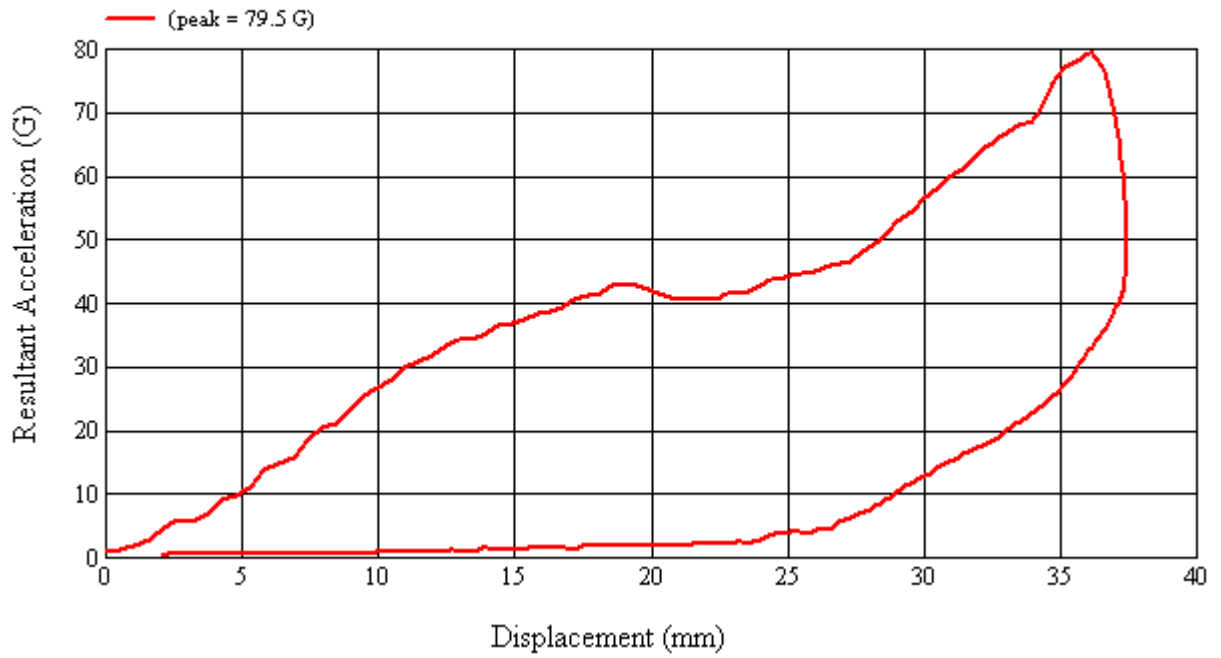

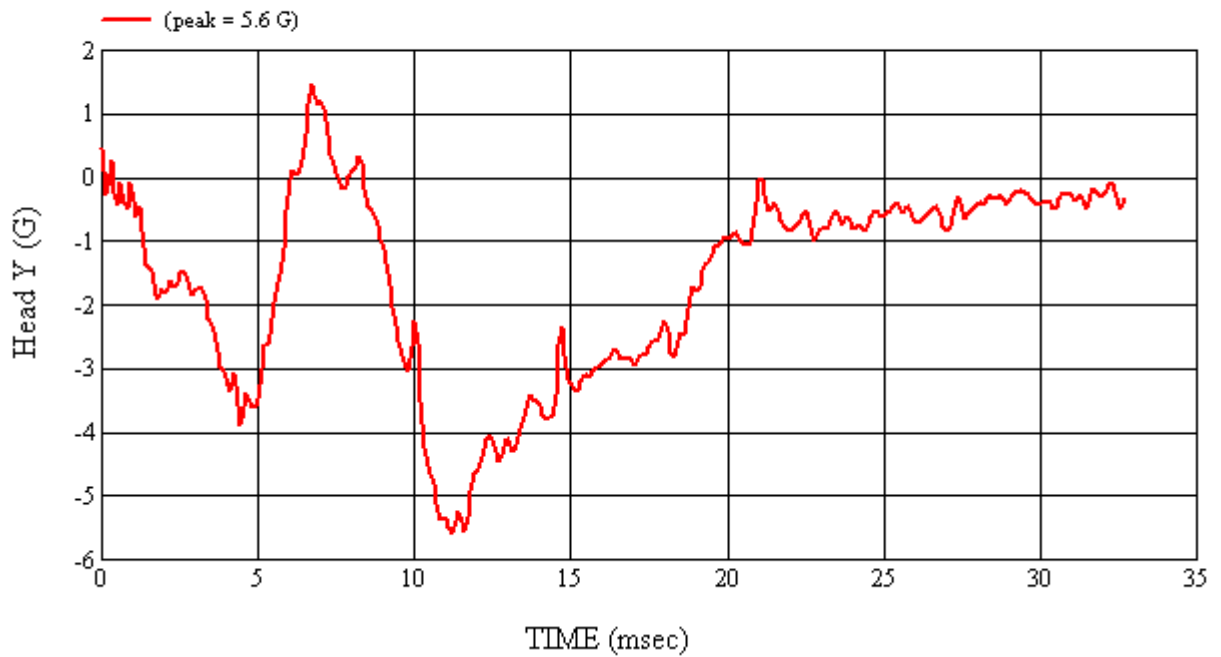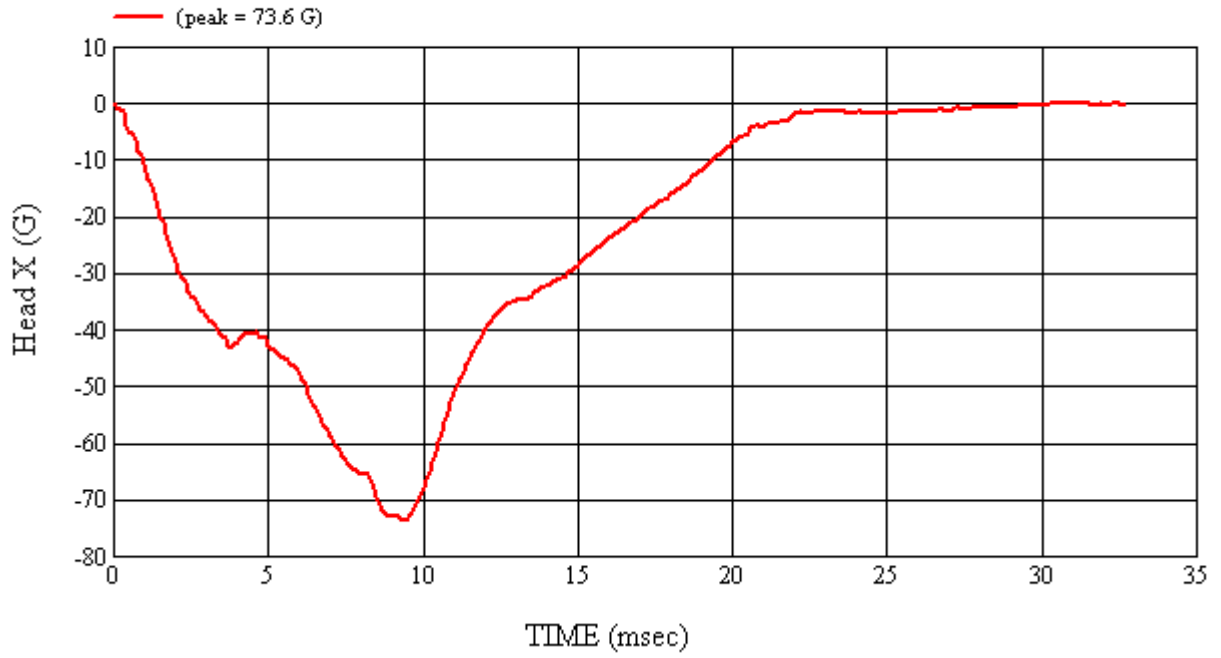


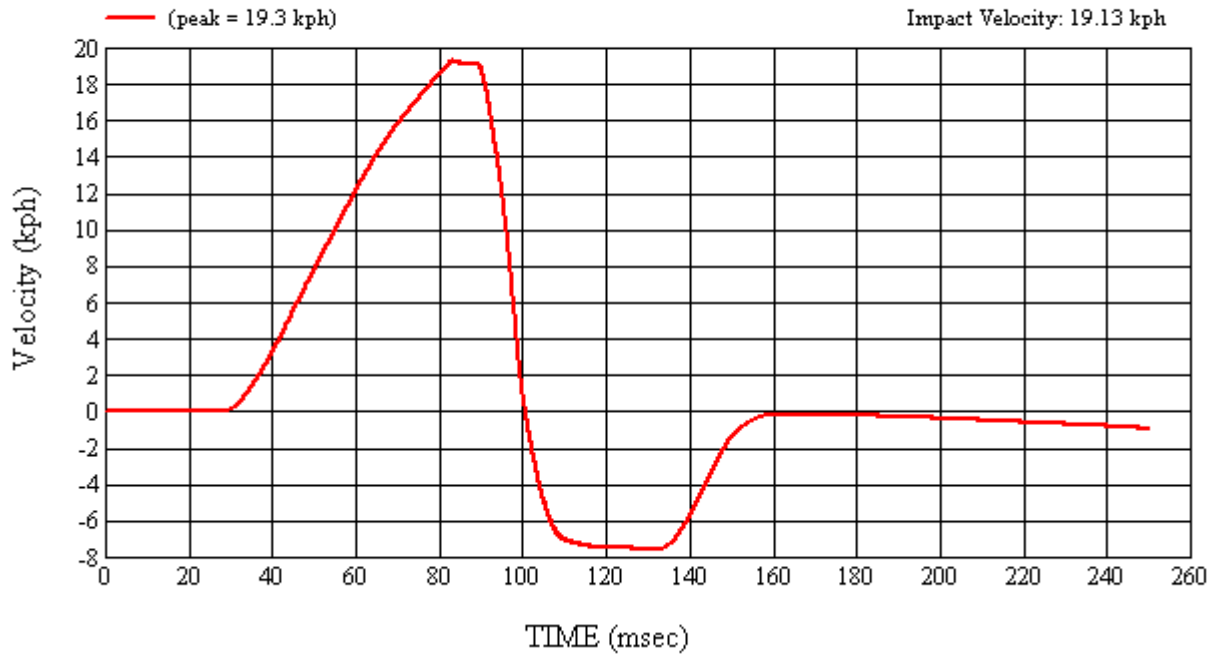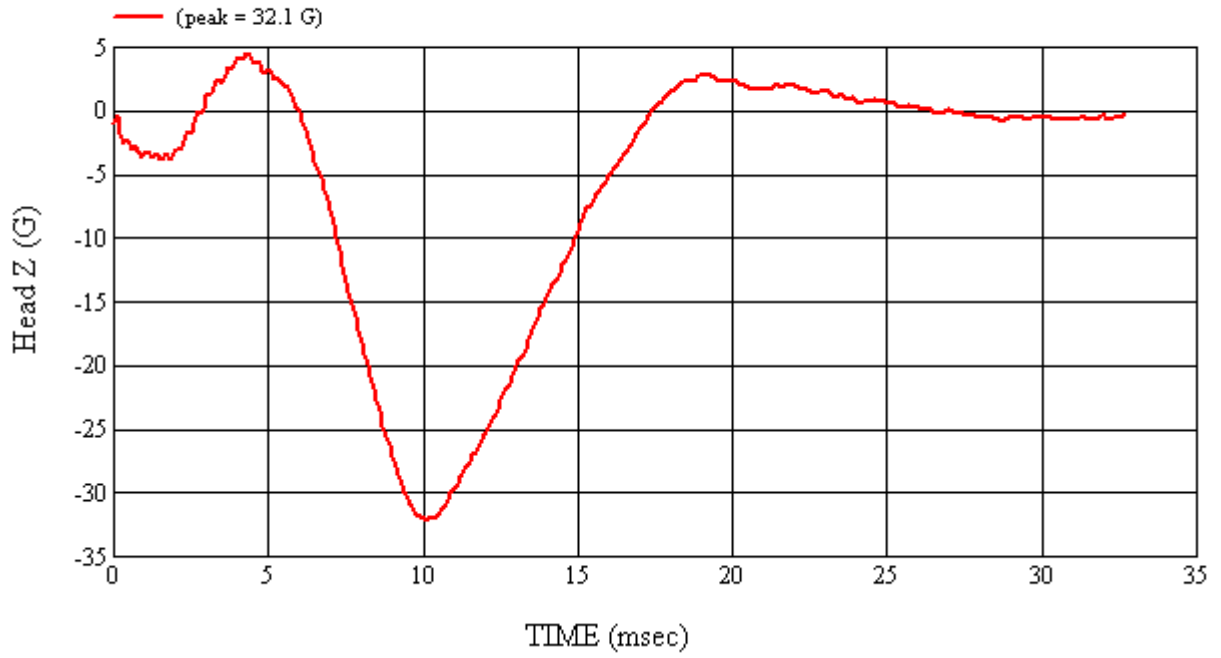


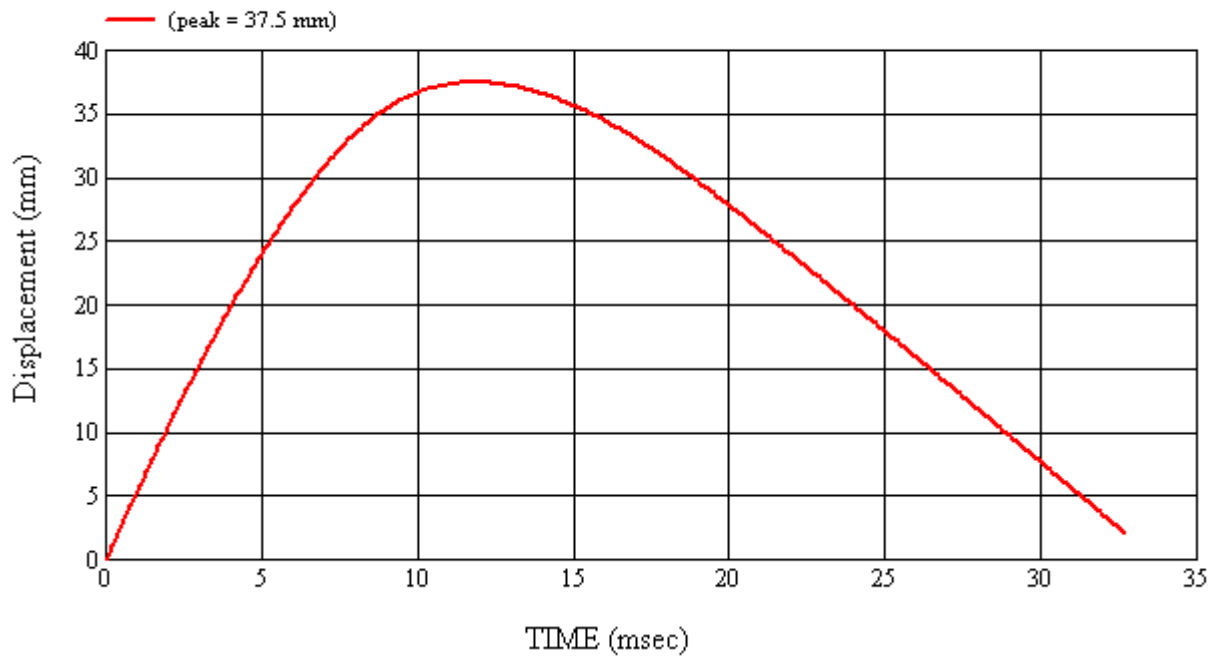

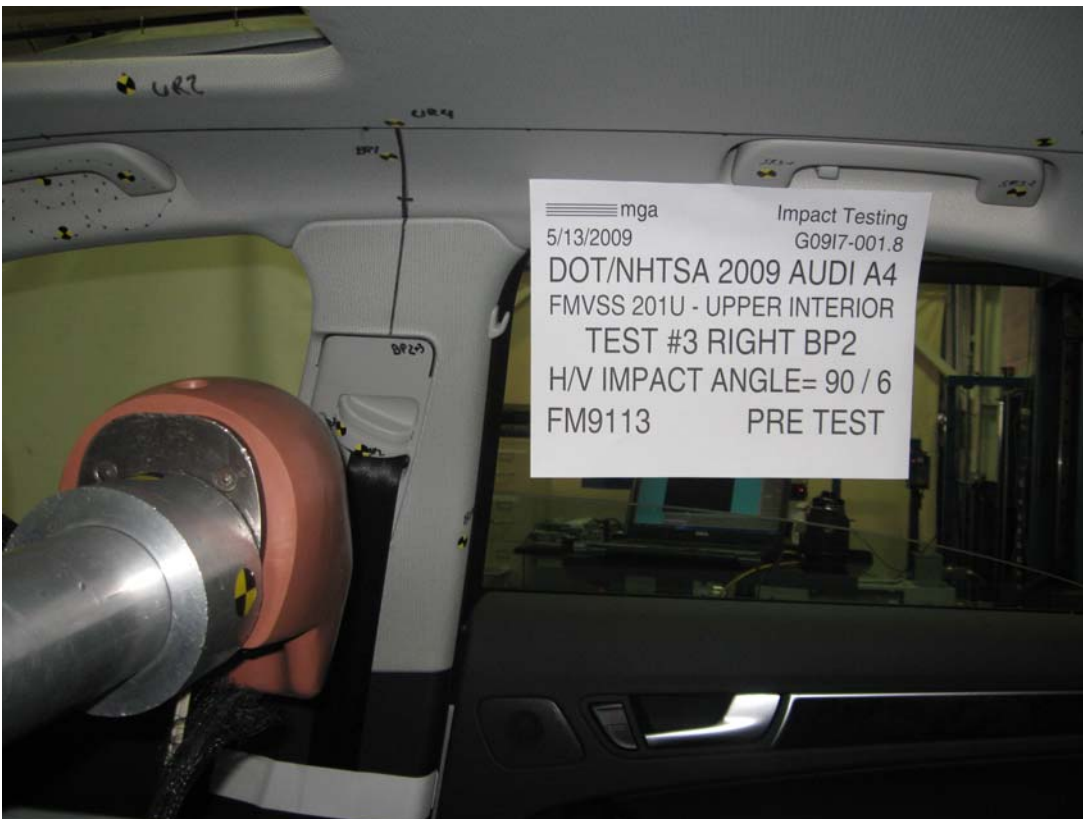



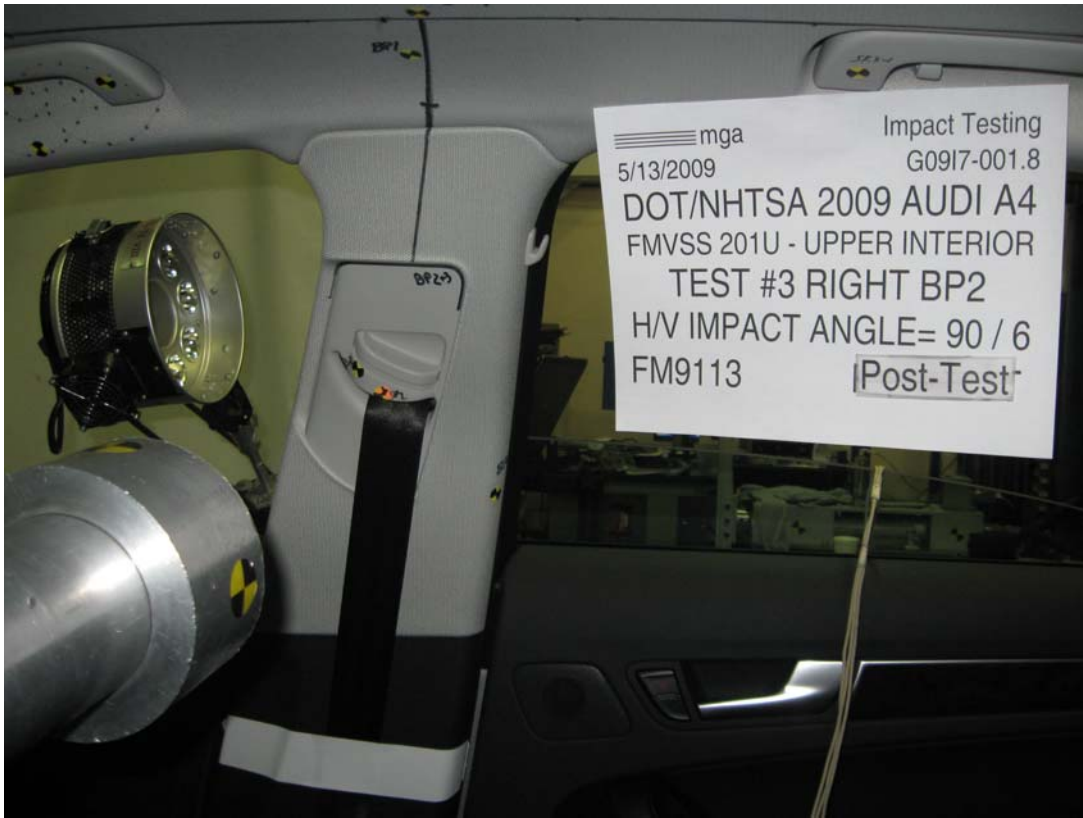

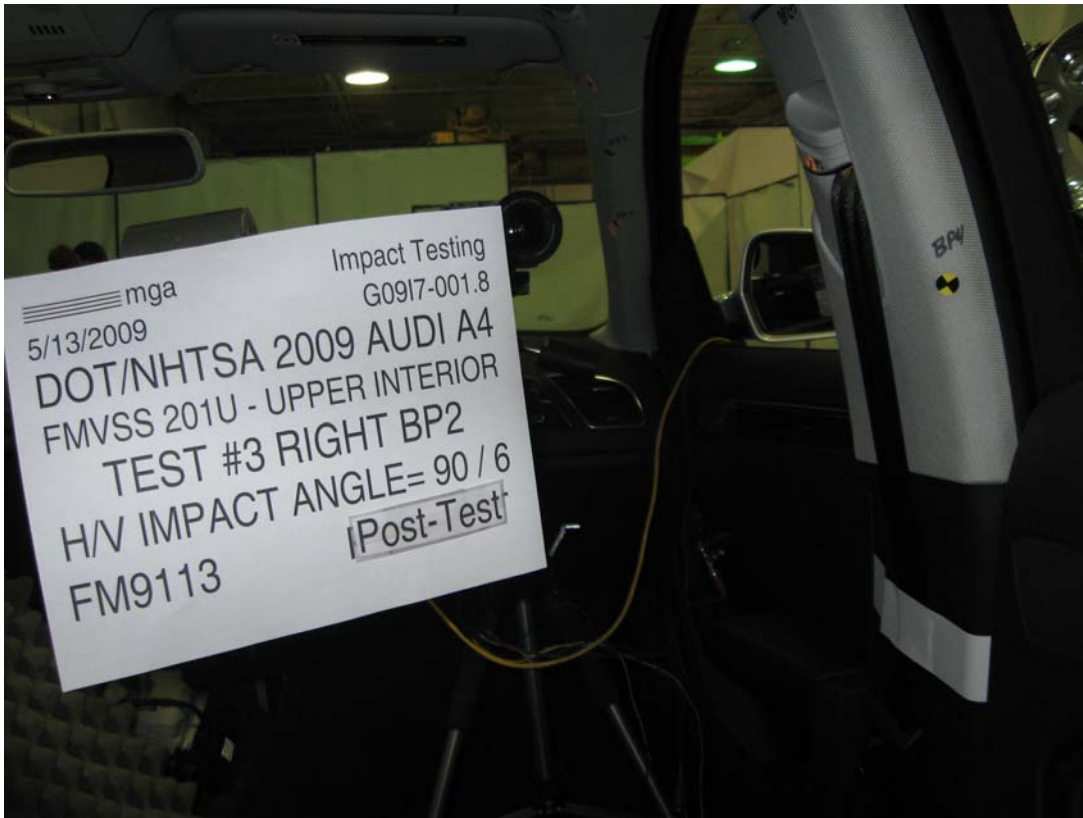

**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Target (Vehicle Side): BP2Right

MGA Test Reference No.:FM9113

Approach Horizontal Angles:90°

Approach Vertical Angles:6°

Additional Description: Anchorage Position: 1 adjustment above mid-position (4 adjustment positions possible).

Test Number:#3

Temperature:21.1C

Humidity:42.1%

Time of Test:12:54:30 PM

FMH Serial No:[038]

**TEST RESULTS:**



HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
615	595	7.5	23.4	16	2 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J22700	-94	1.06	1.06
Y	6	J36197	106.3	0.85	0.85
Z	7	J36353	97.5	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/13/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9113


Target Location: BP2, Right Side

Test Date: 5/13/2009

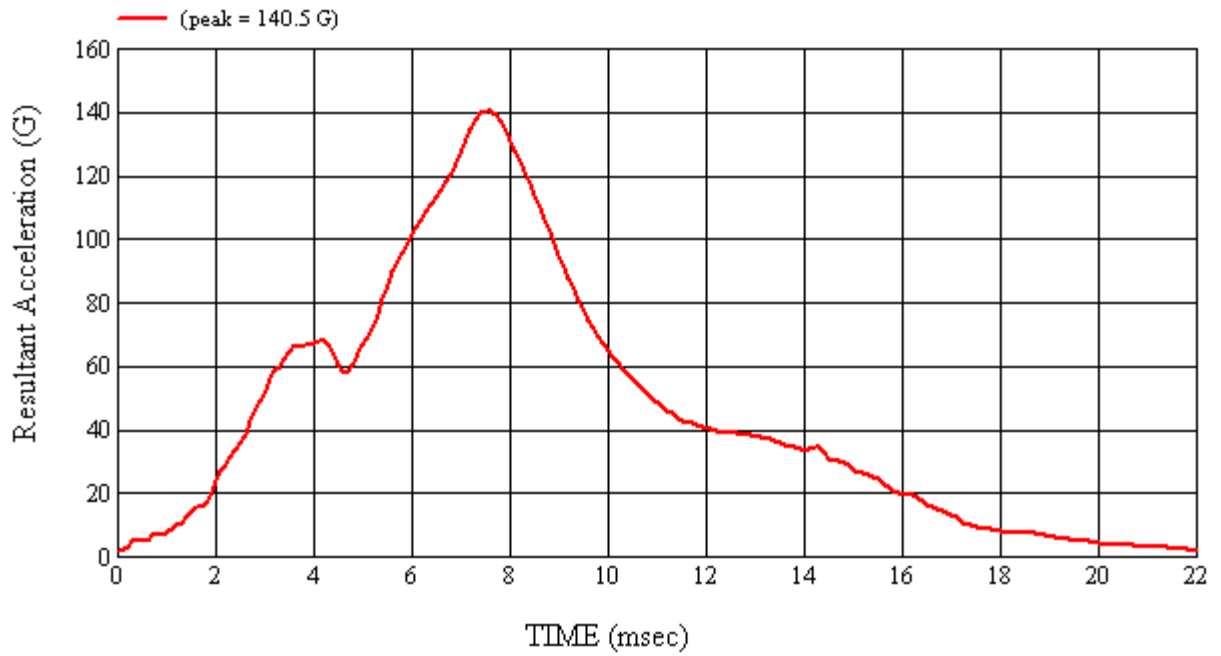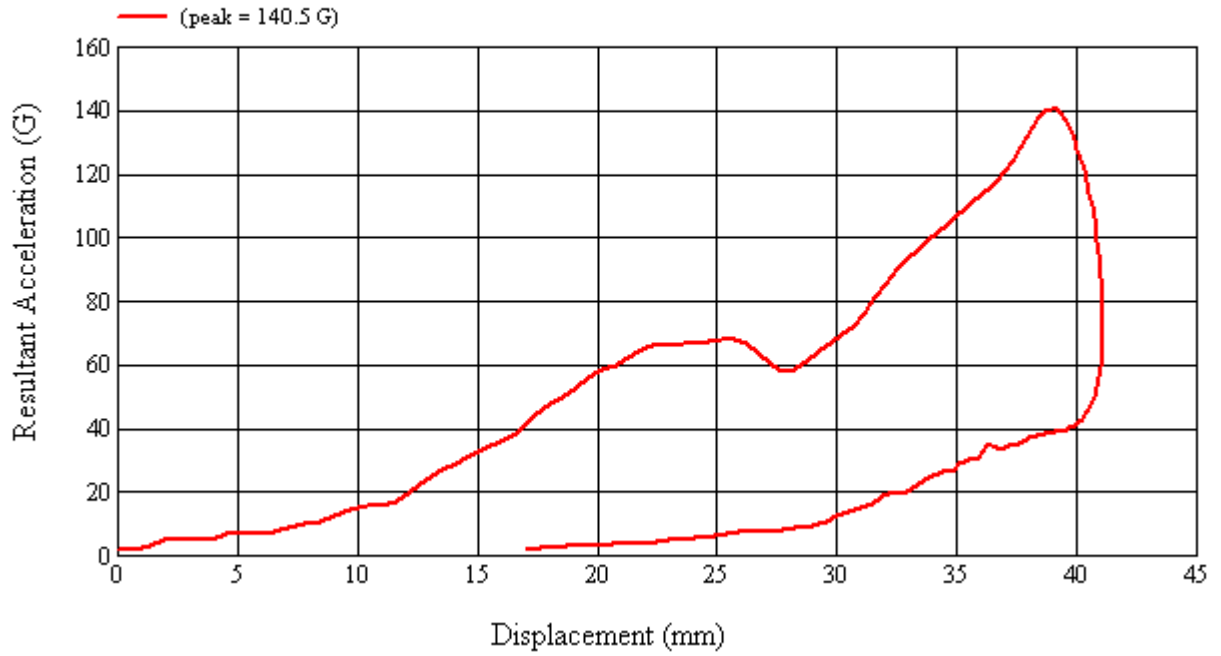

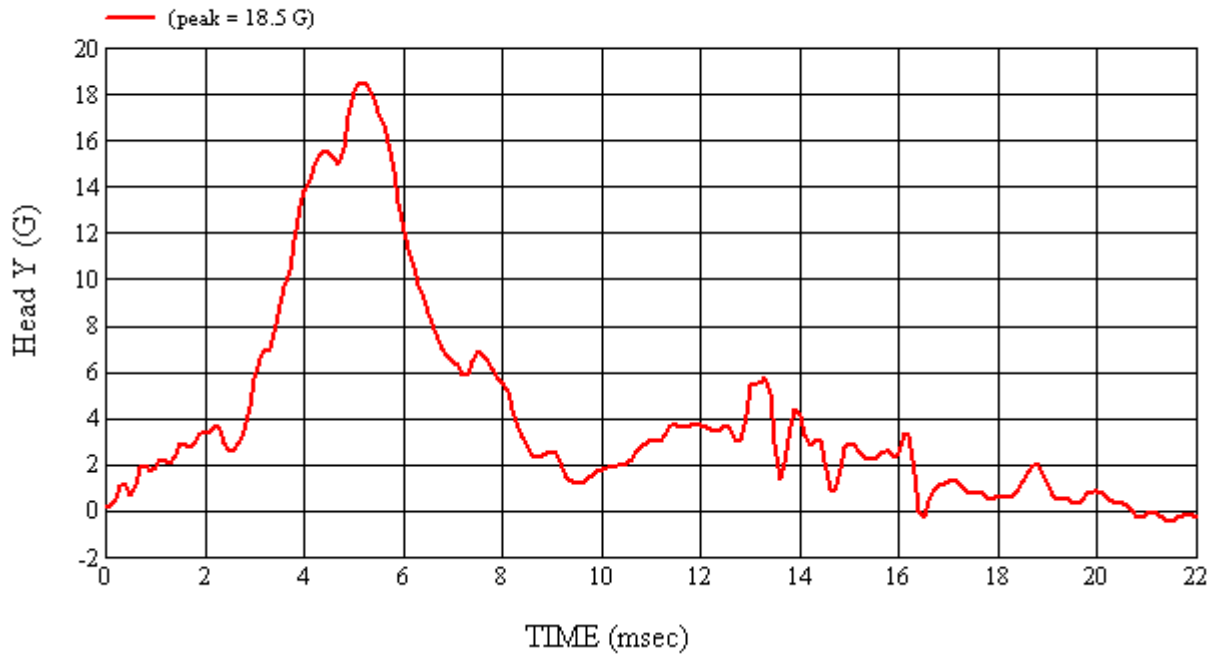
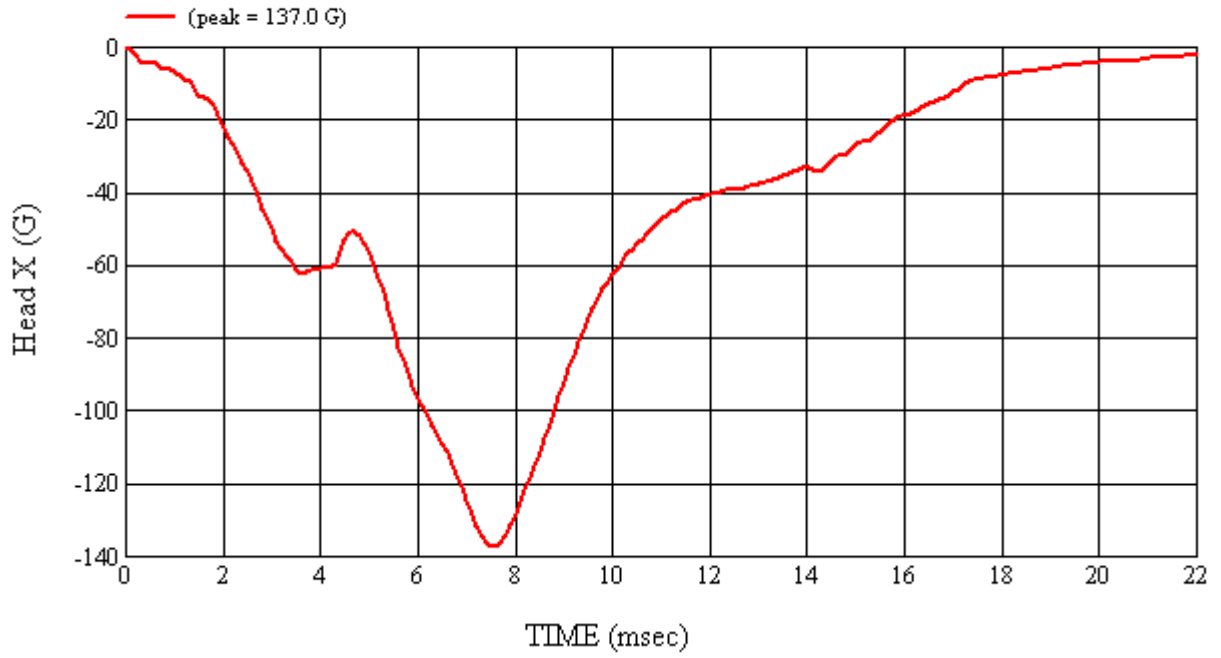


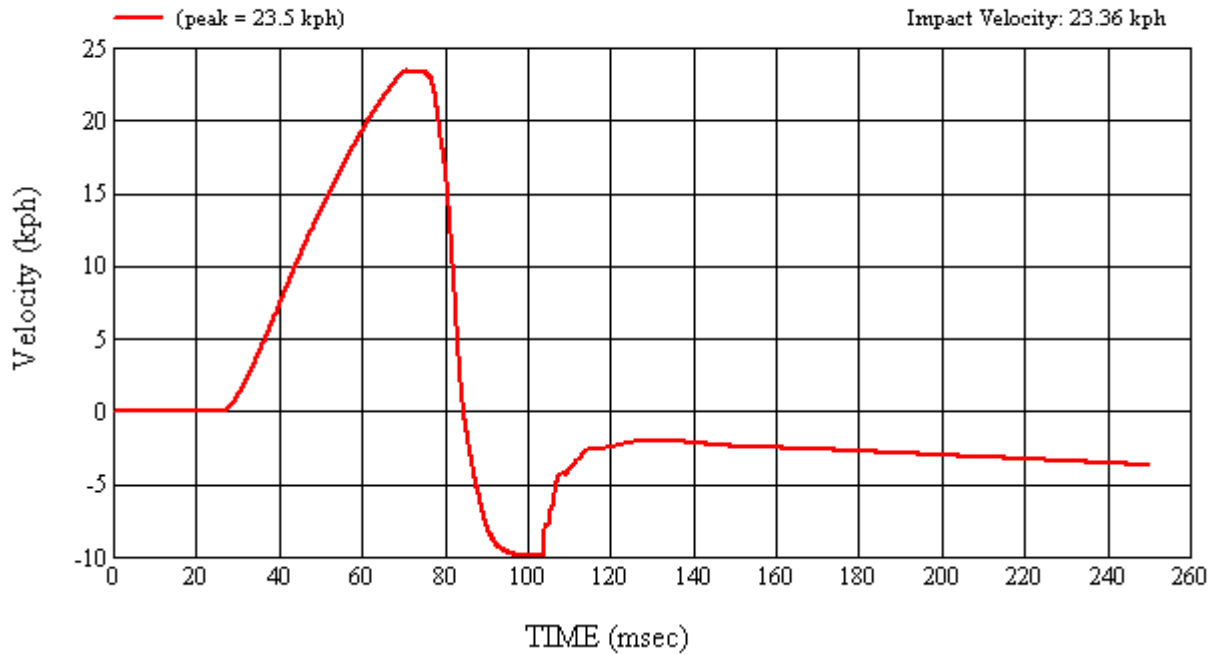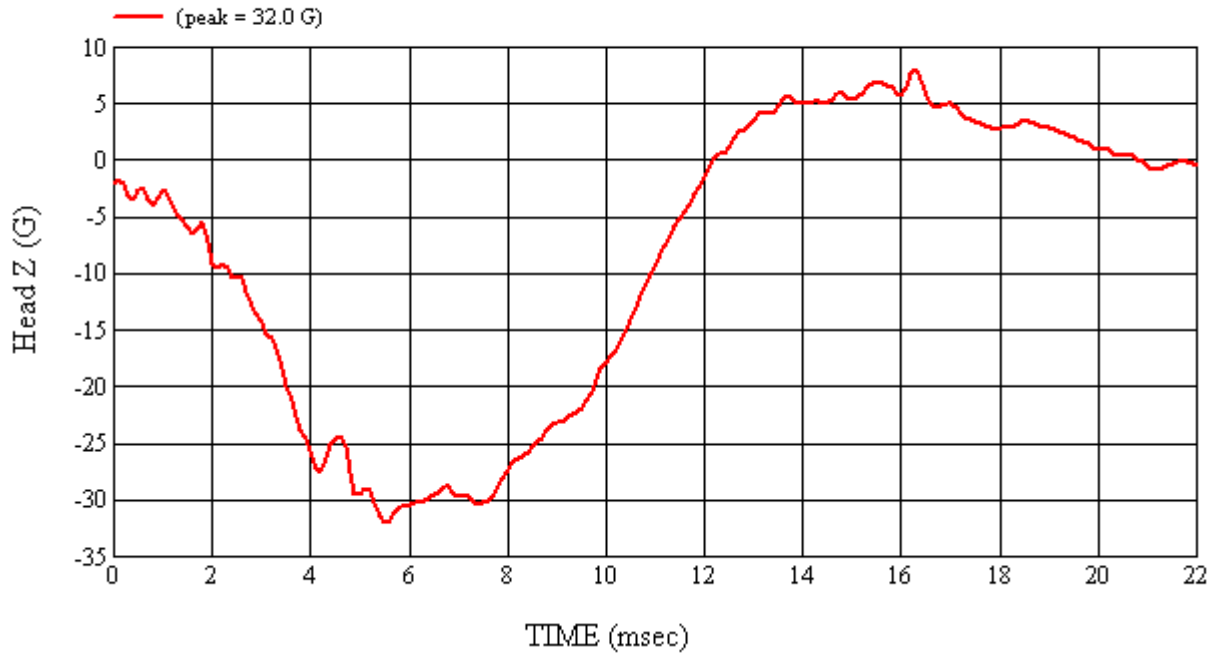

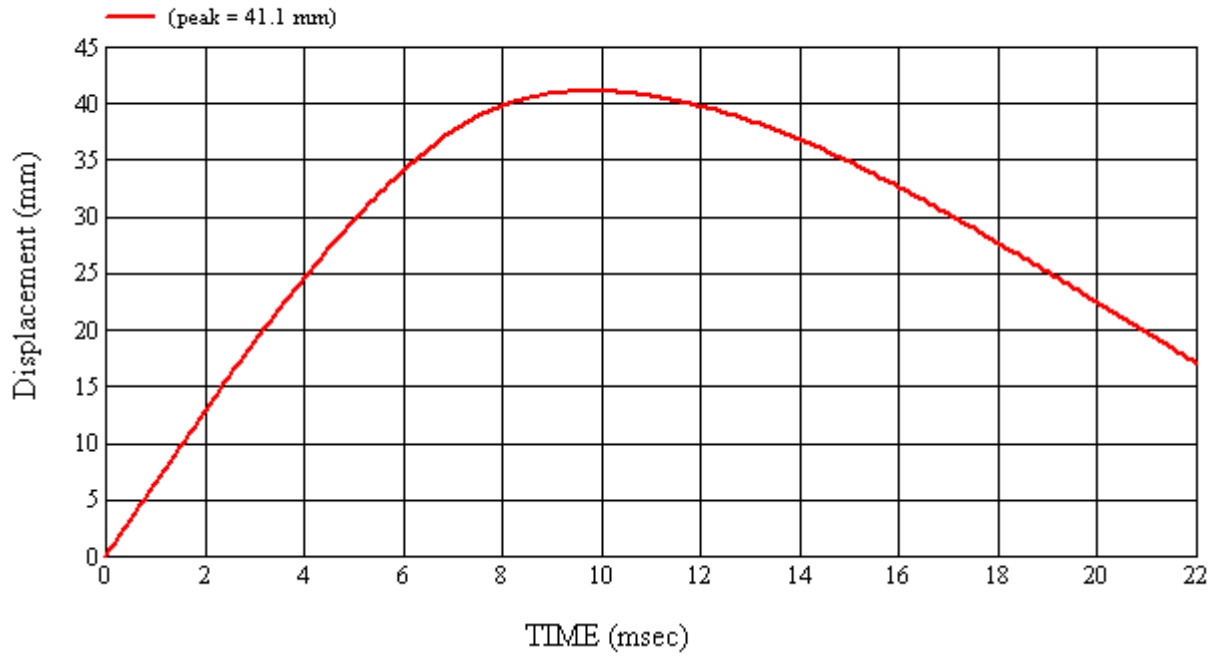





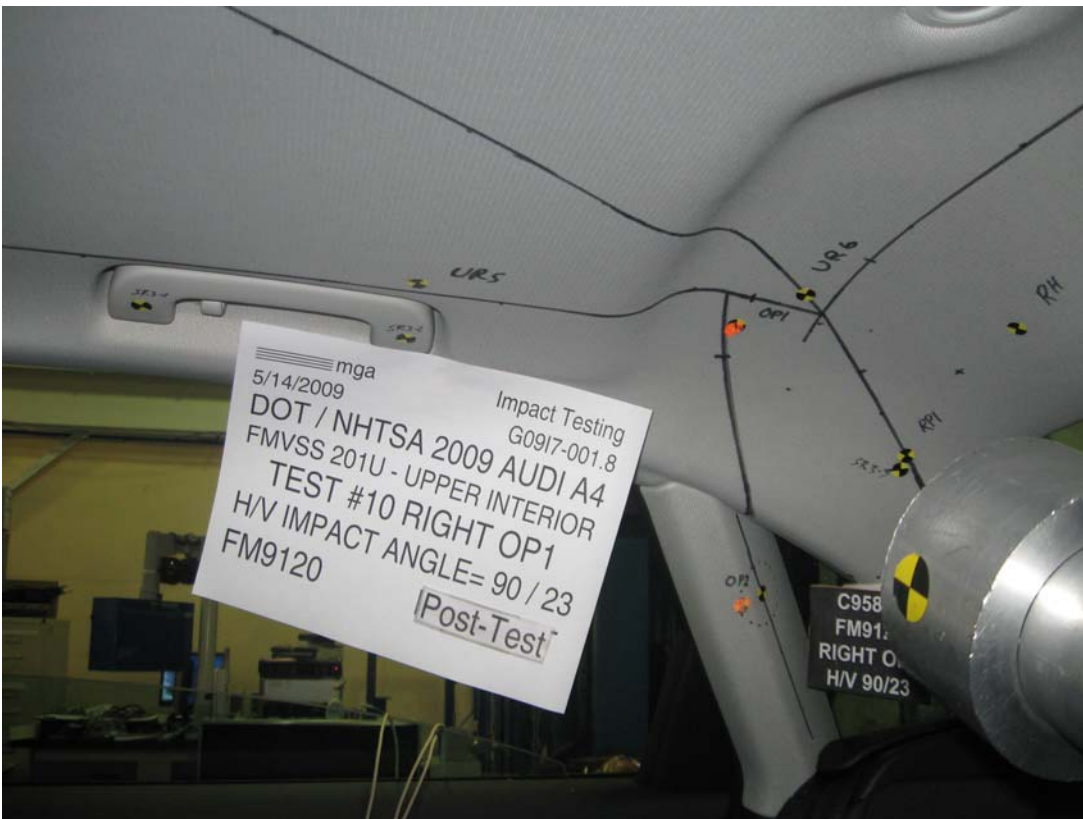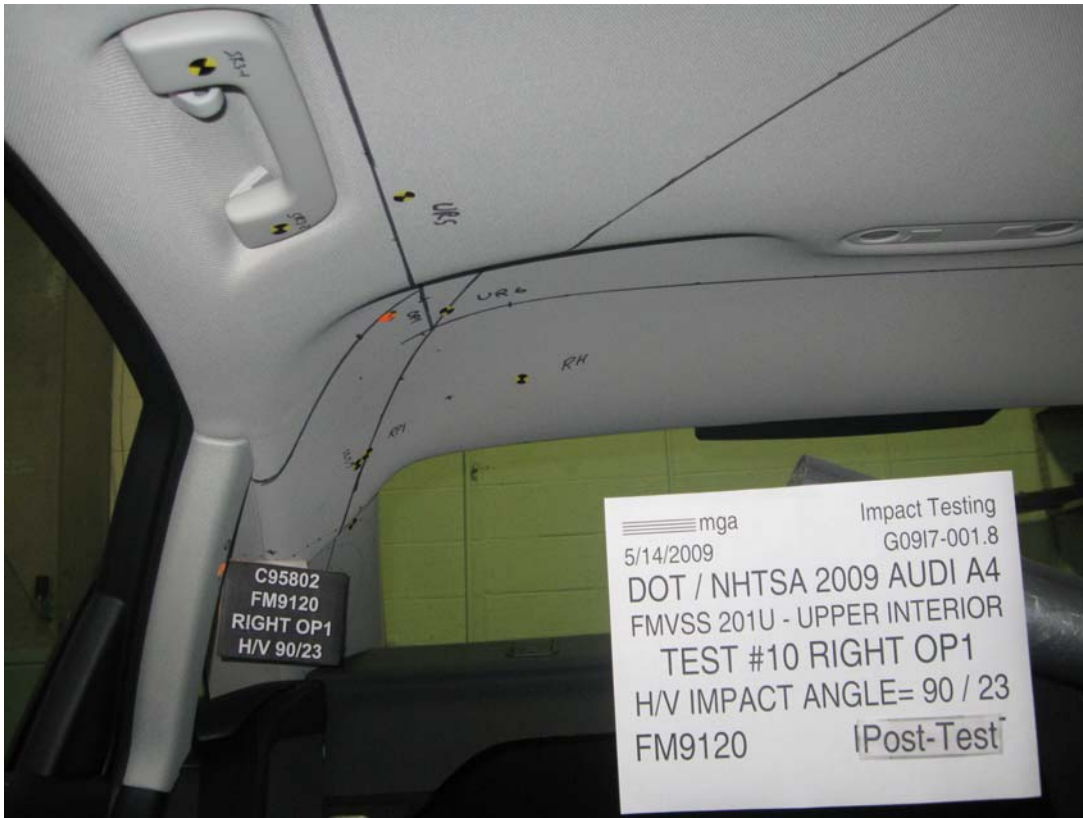



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Target (Vehicle Side): OP1Right

MGA Test Reference No.:FM9120

Approach Horizontal Angles:90°

Approach Vertical Angles:23°

Additional Description:

Test Number:#10

Temperature:20.9C

Humidity:57.9%

Time of Test:11:19:08 AM

FMH Serial No:[038]

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
536	490	11.2	23.8	43	5 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J22700	-94	1.06	1.06
Y	6	J36197	106.3	0.85	0.85
Z	7	J36353	97.5	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/14/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9120


Target Location: OPI, Right Side



Test Date: 5/14/2009

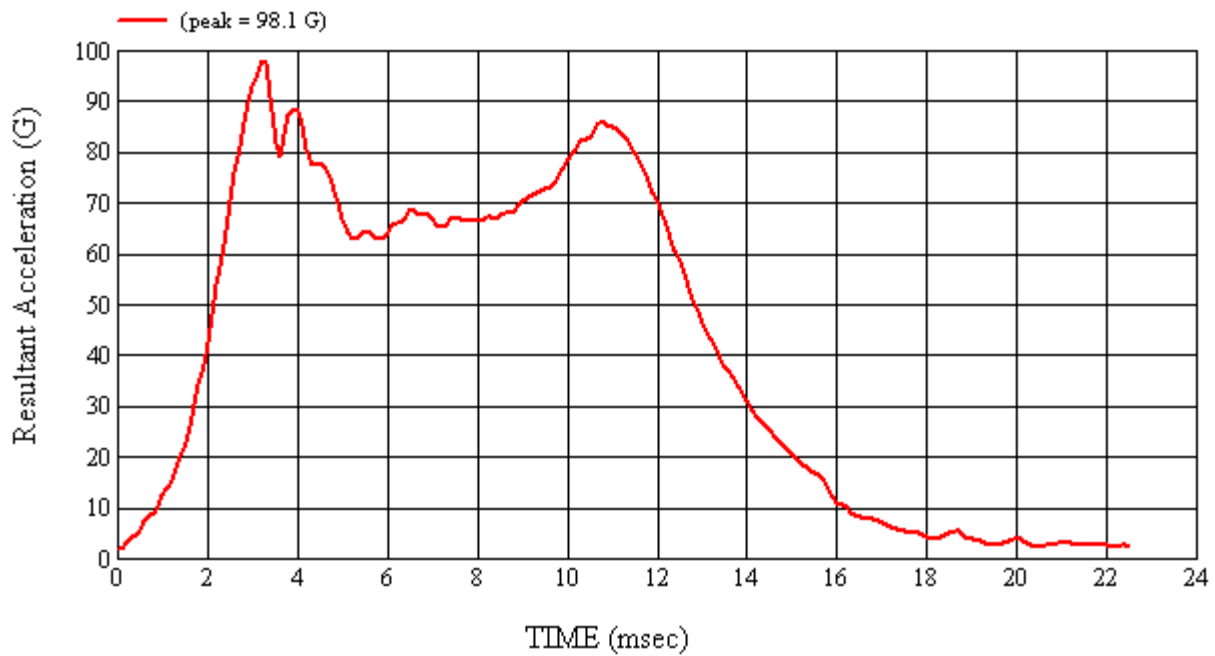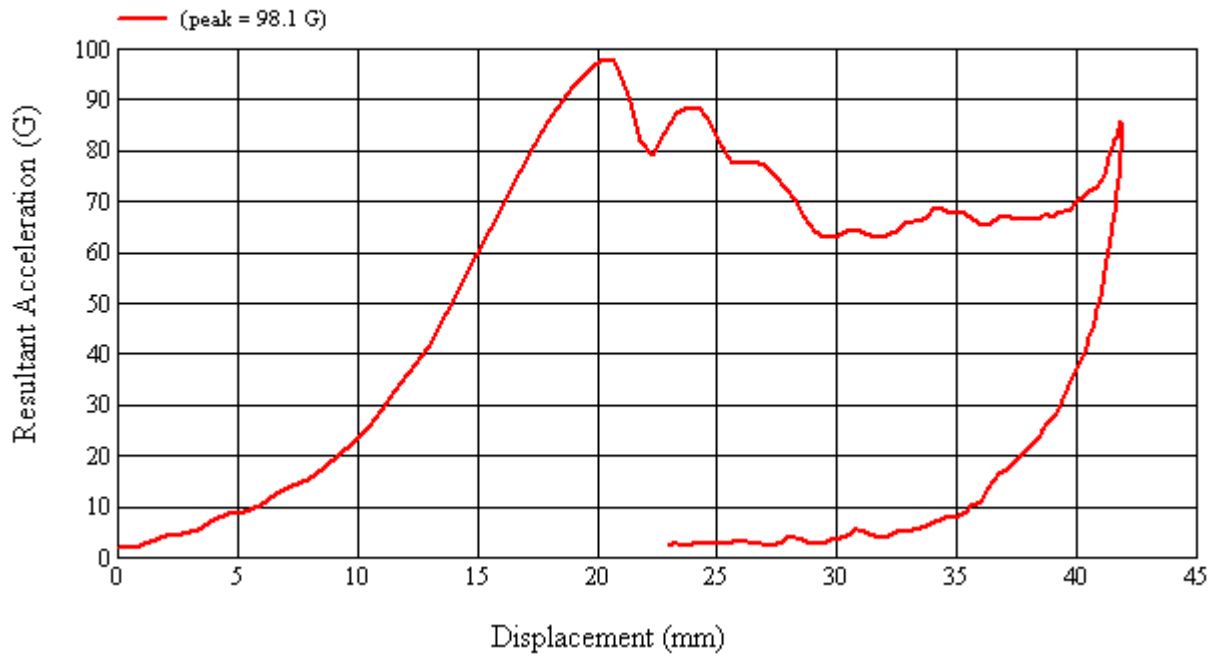

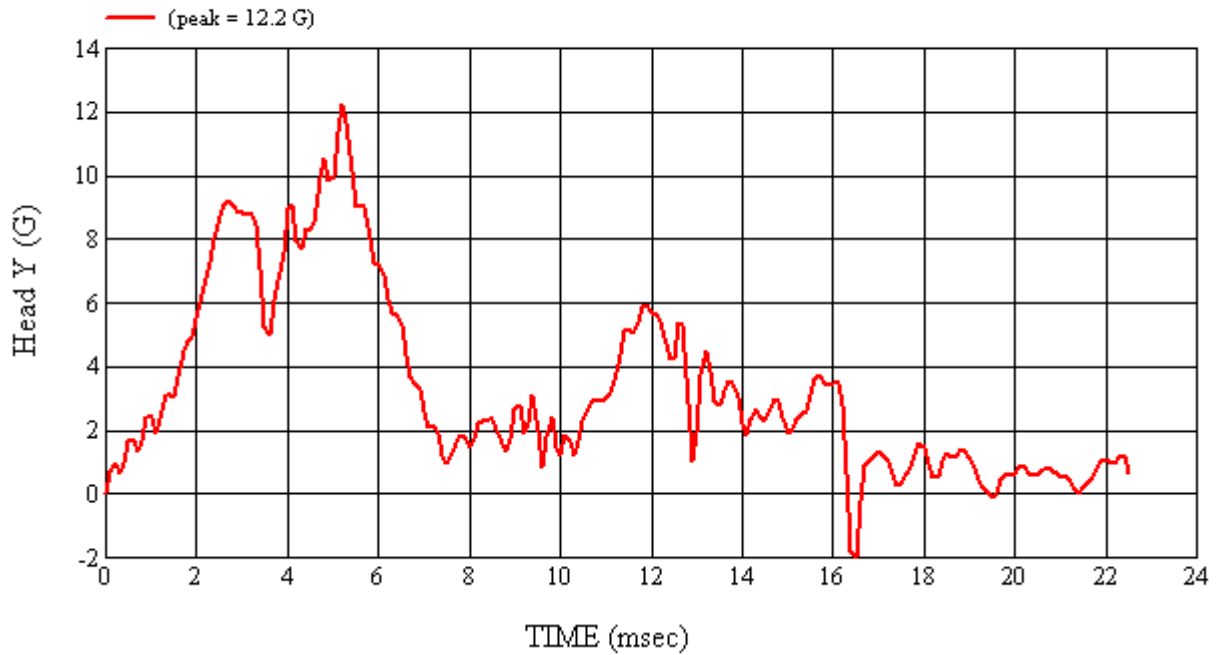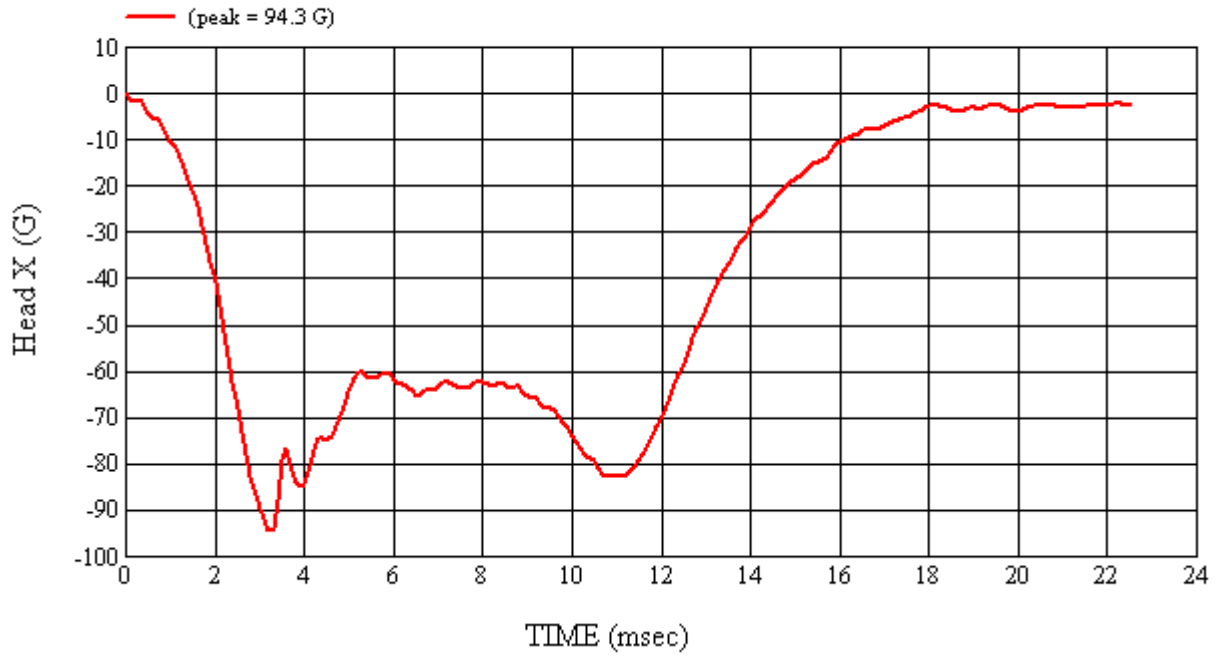


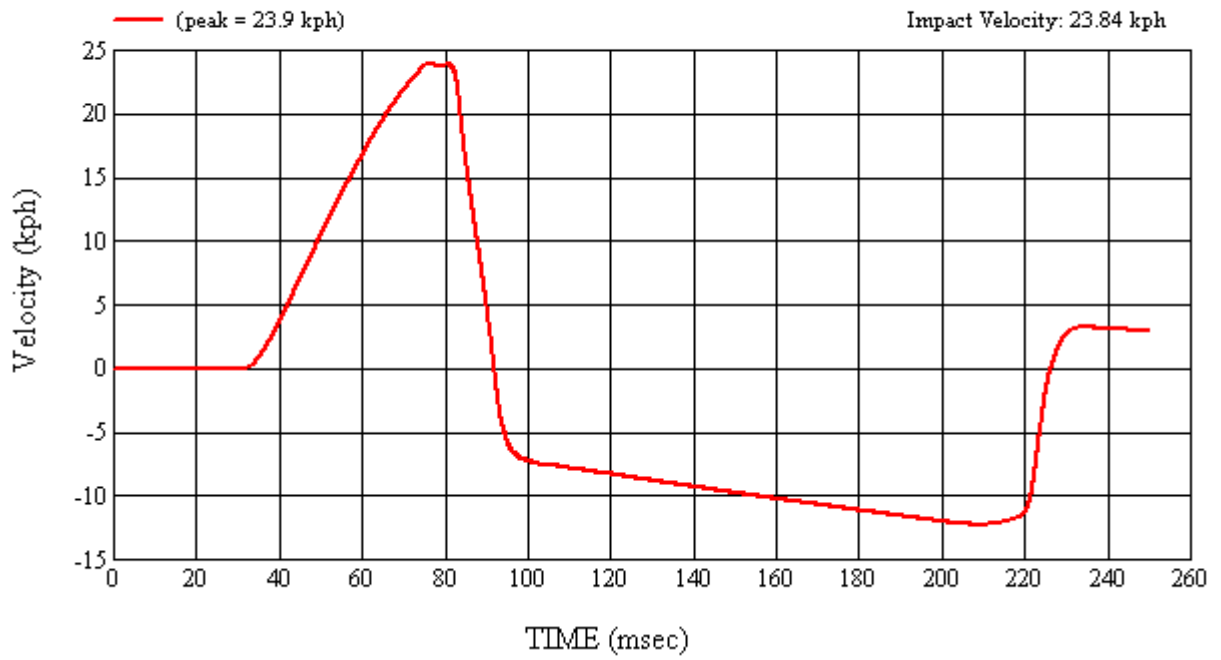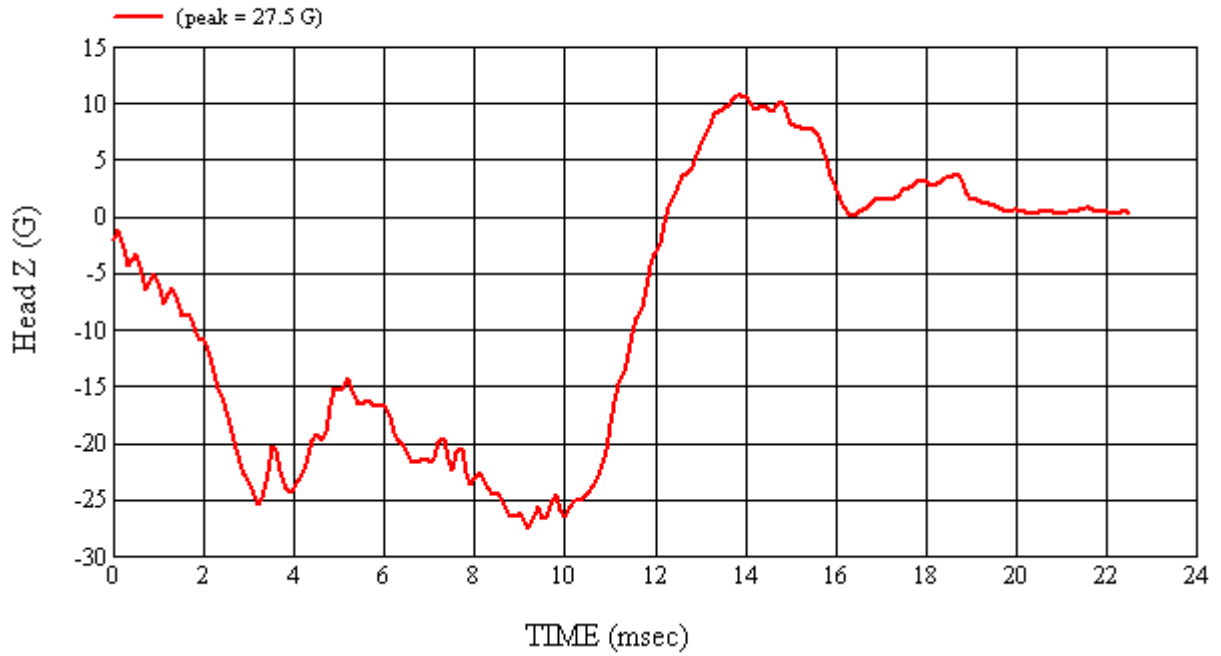

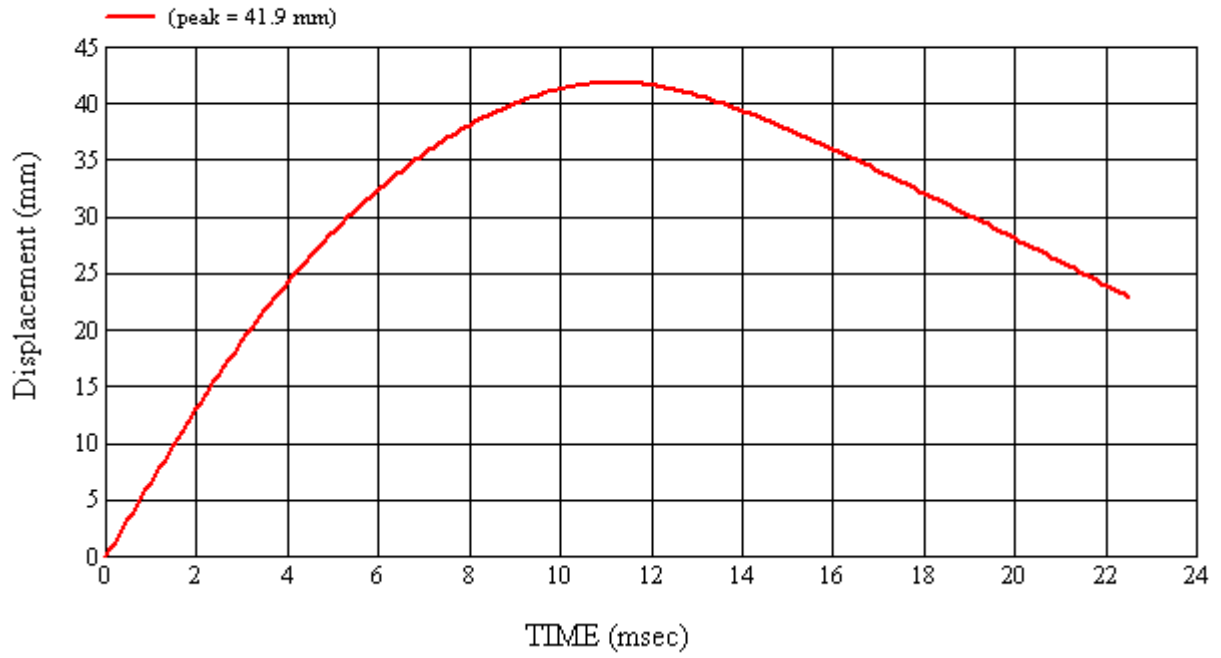

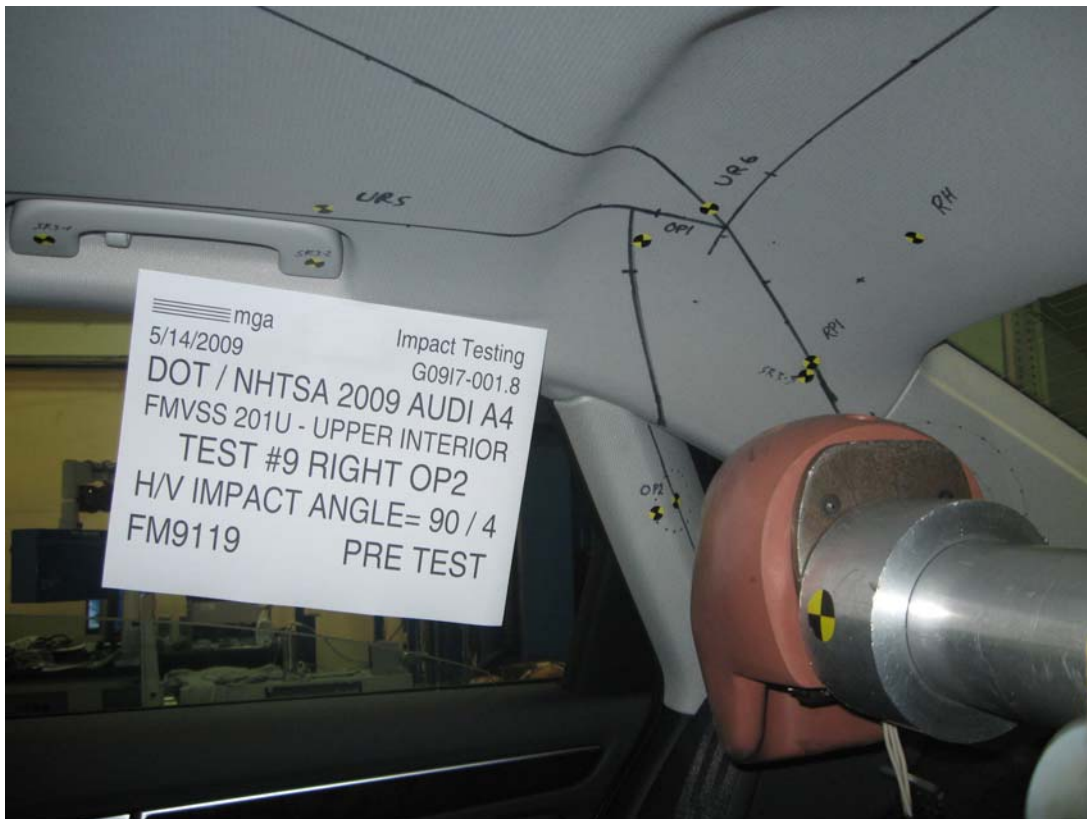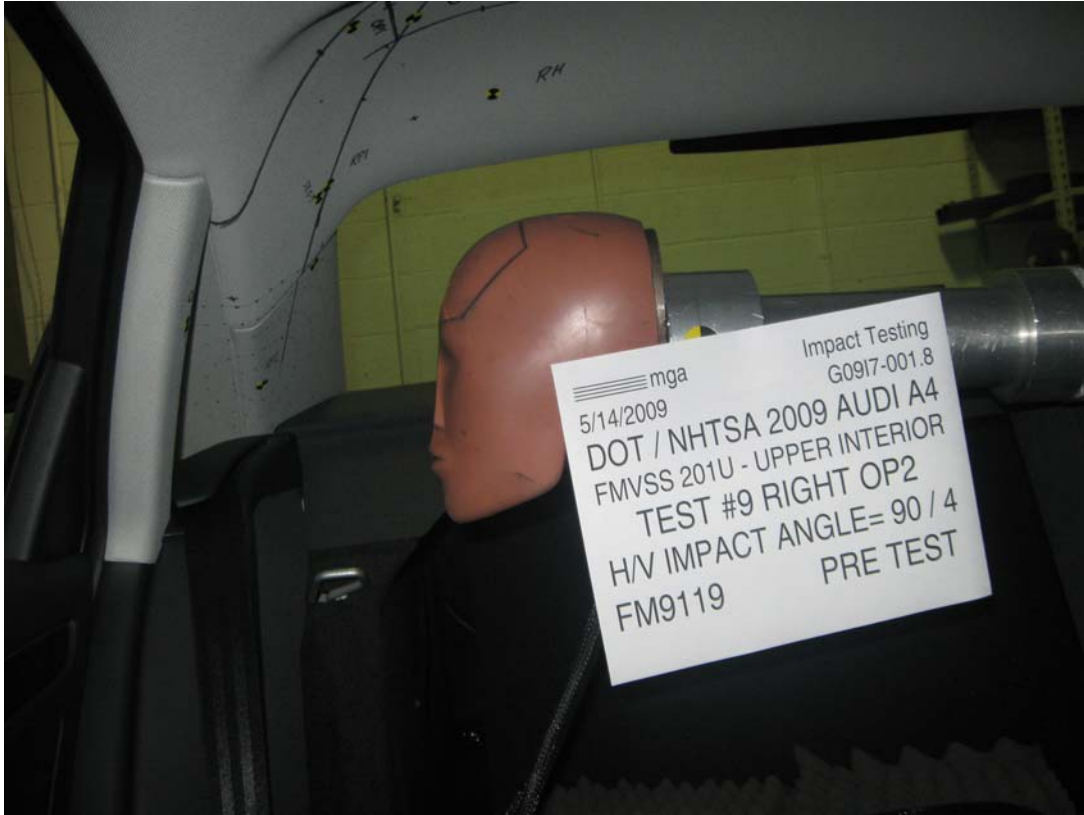



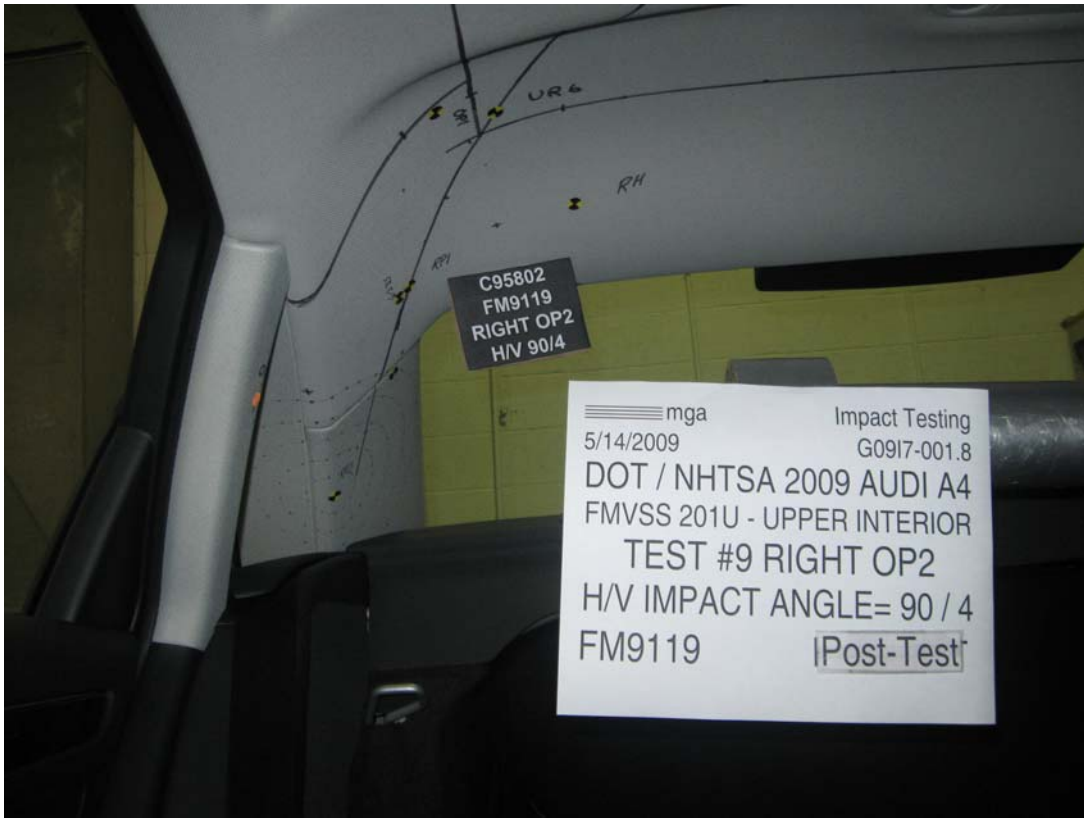



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Target (Vehicle Side): OP2Right

MGA Test Reference No.:FM9119

Approach Horizontal Angles:90°

Approach Vertical Angles:4°

Additional Description:Relocation Spheres: 1

Test Number:#9

Temperature:20.9C

Humidity:62.7%

Time of Test:10:12:41 AM

FMH Serial No:[037]

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
594	566	9.3	23.9	23	4 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	AHTB2	-115.9	1.06	1.06
Y	6	J14103	93.7	0.85	0.85
Z	7	J35800	97.1	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/14/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9119


Target Location: OP2, Right Side


Test Date: 5/14/2009

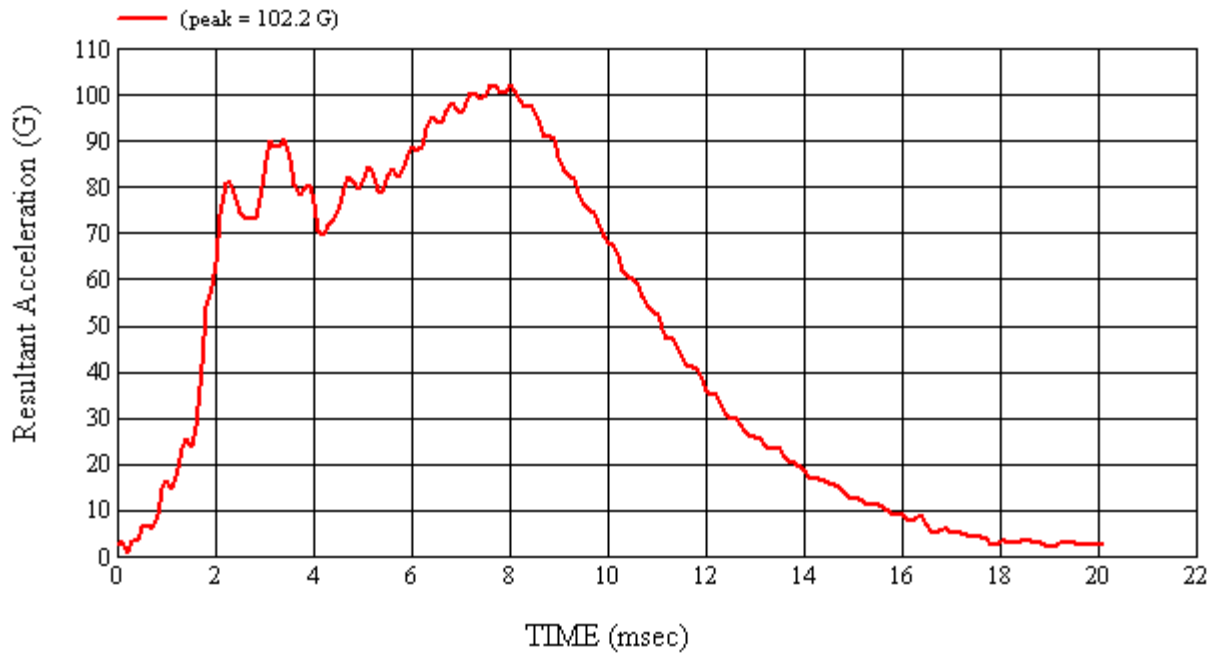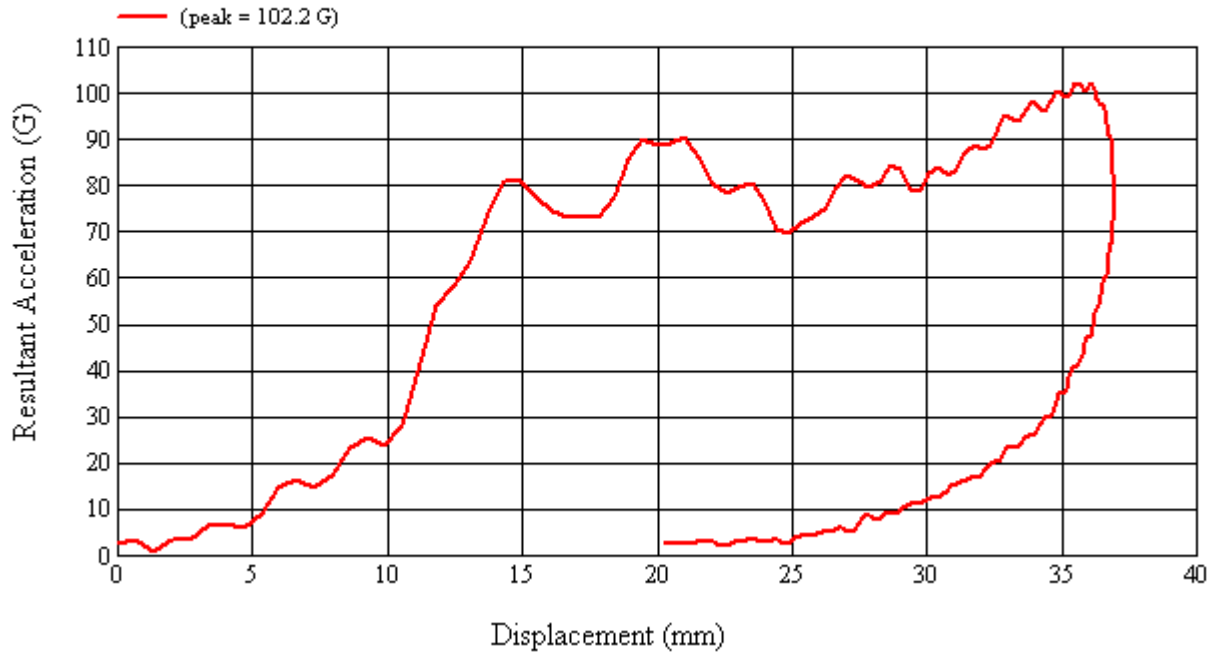

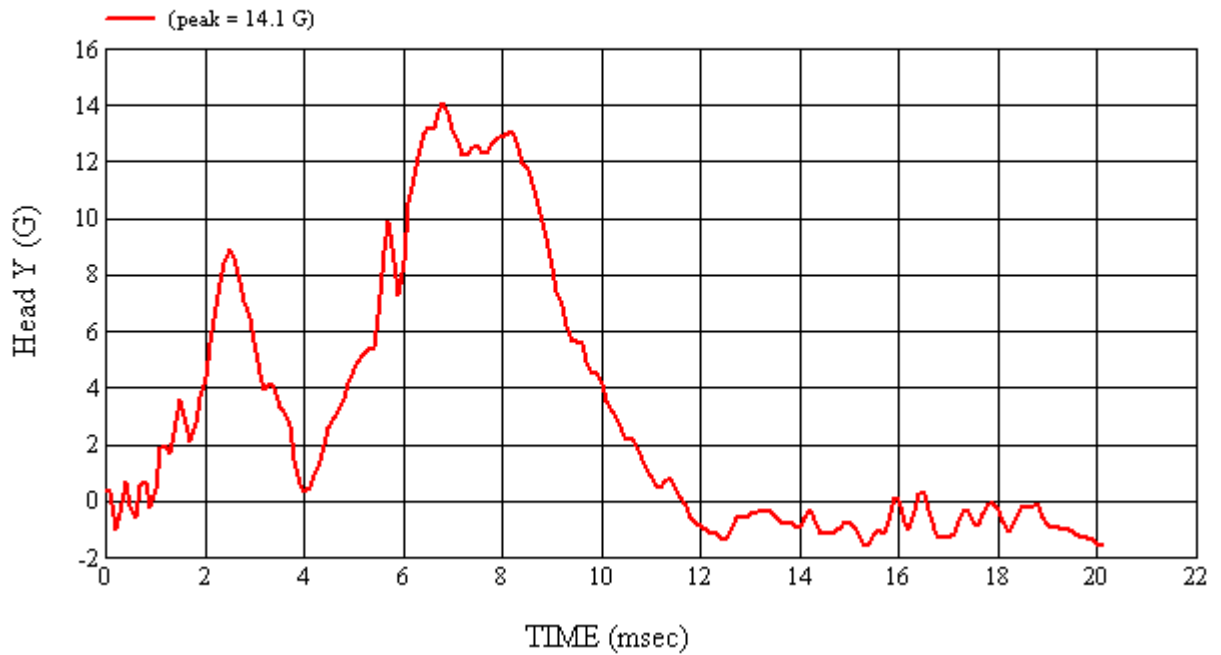
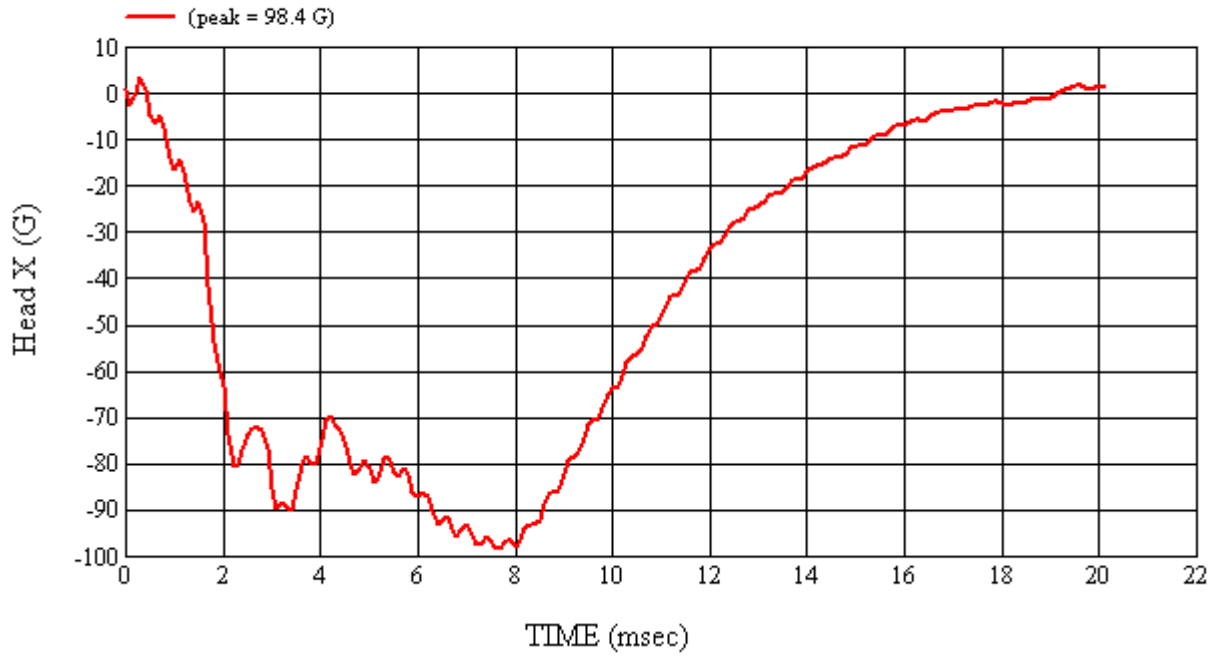


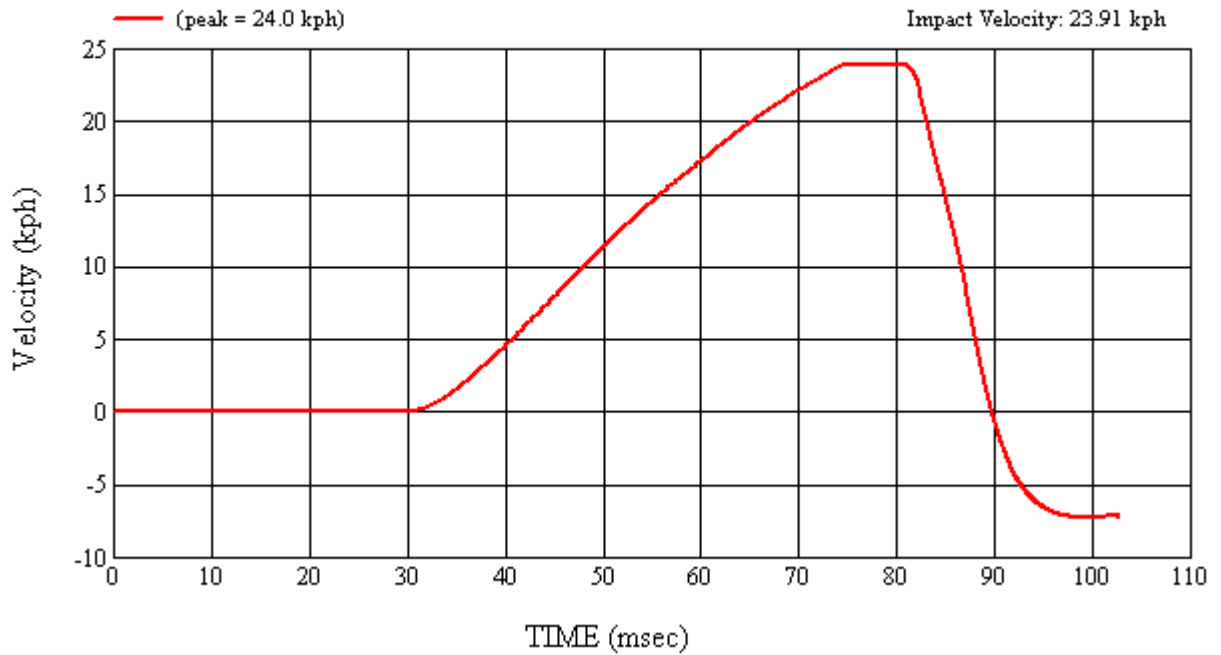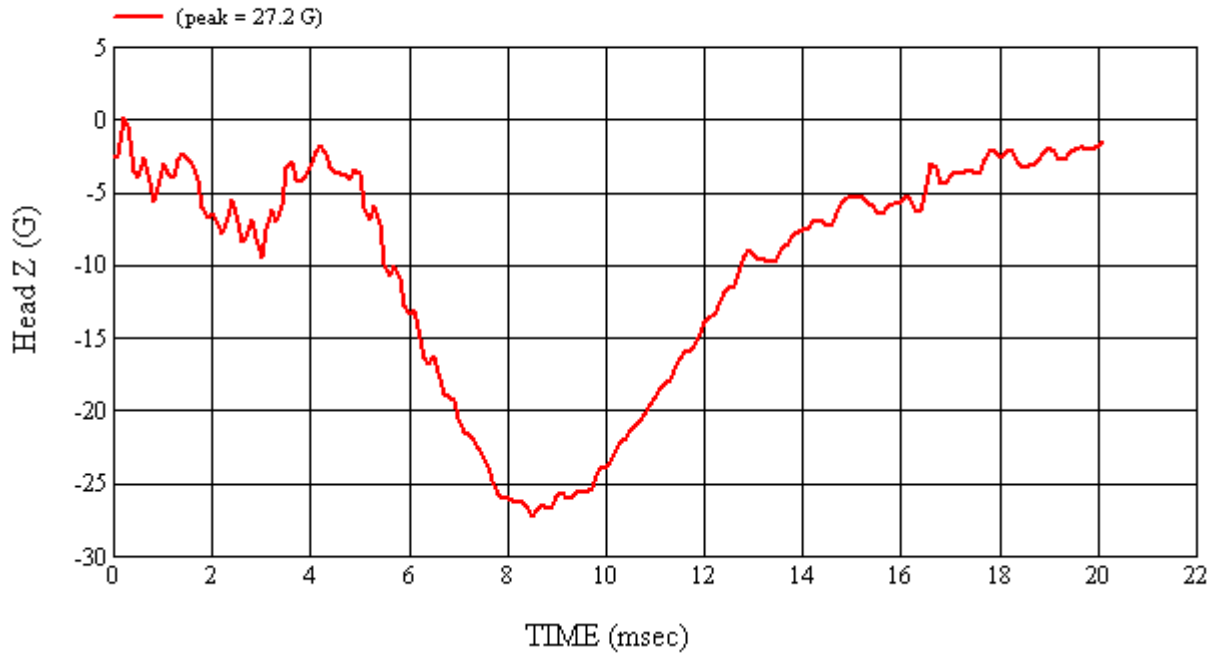

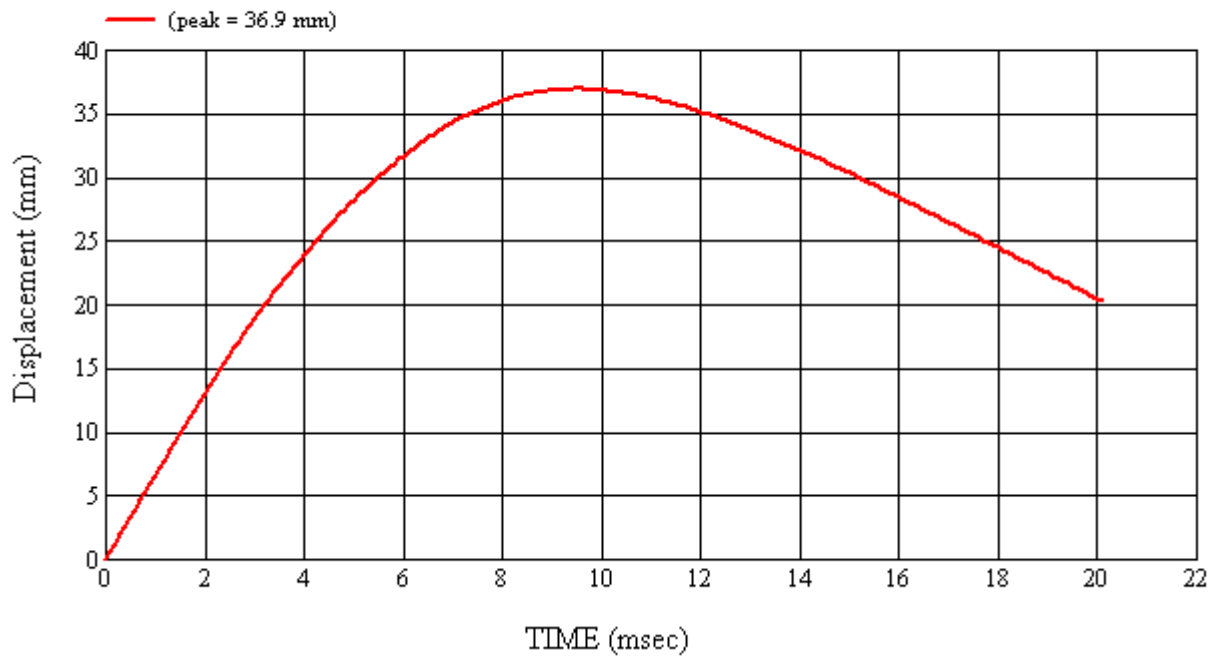

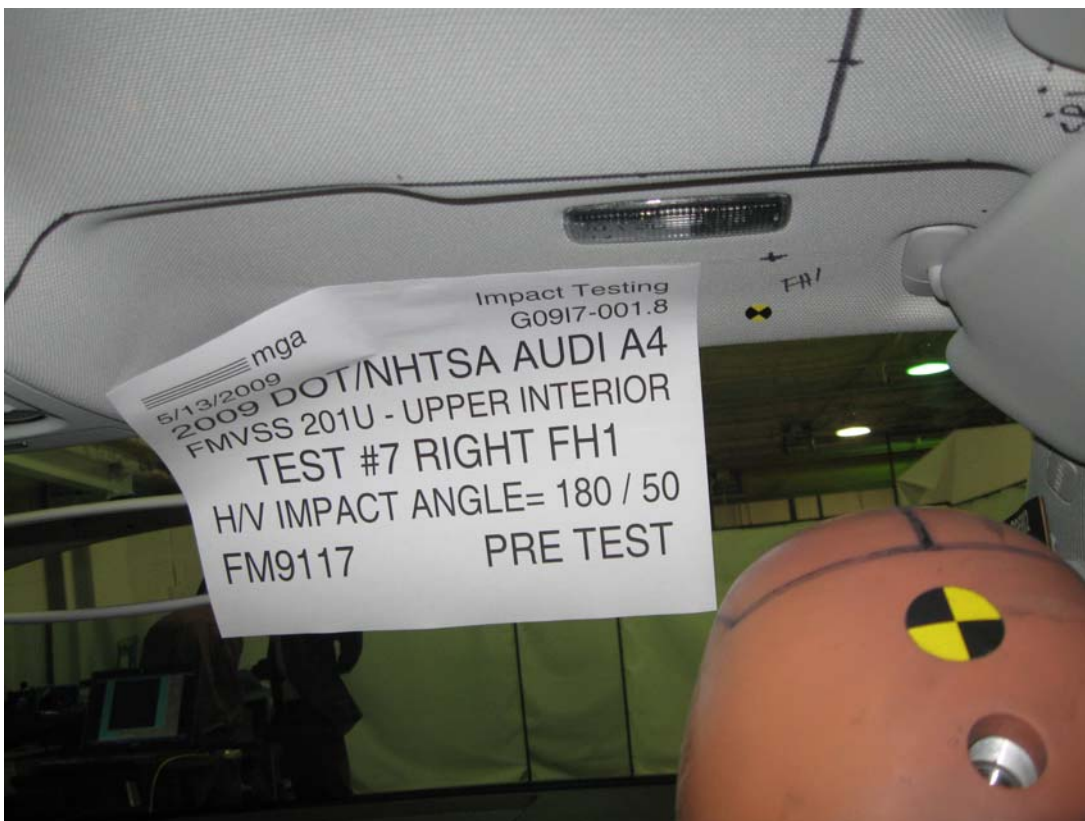



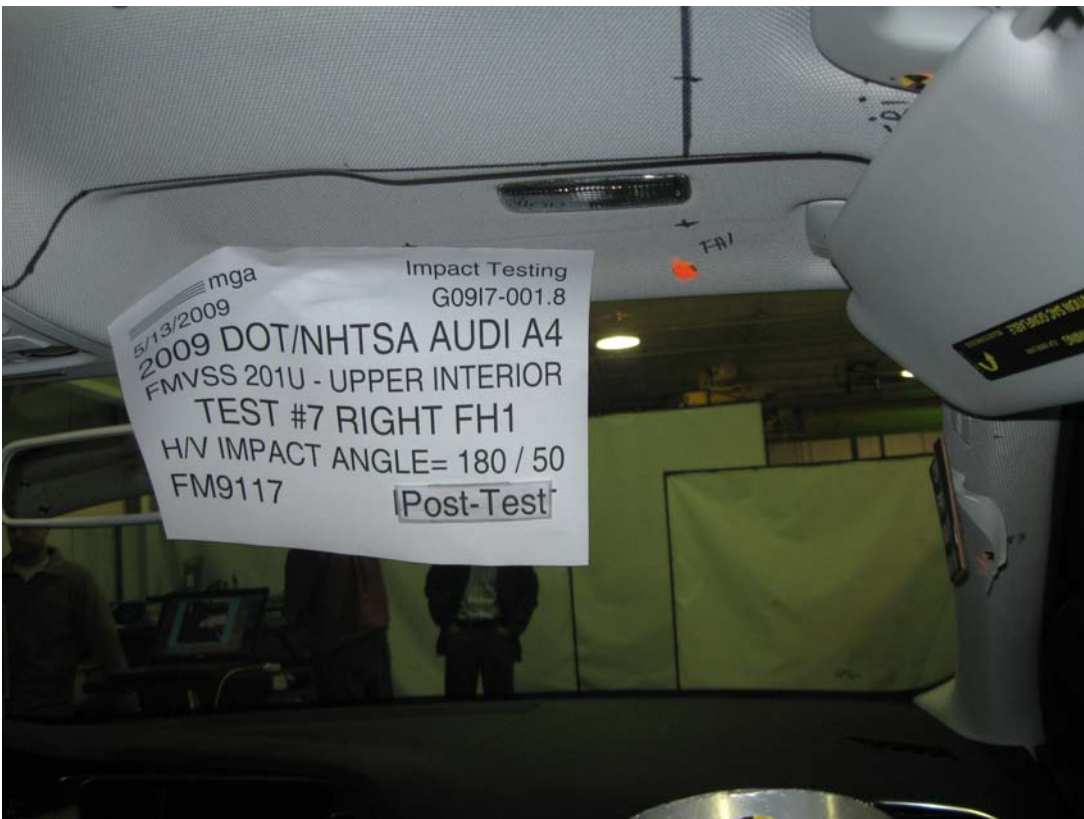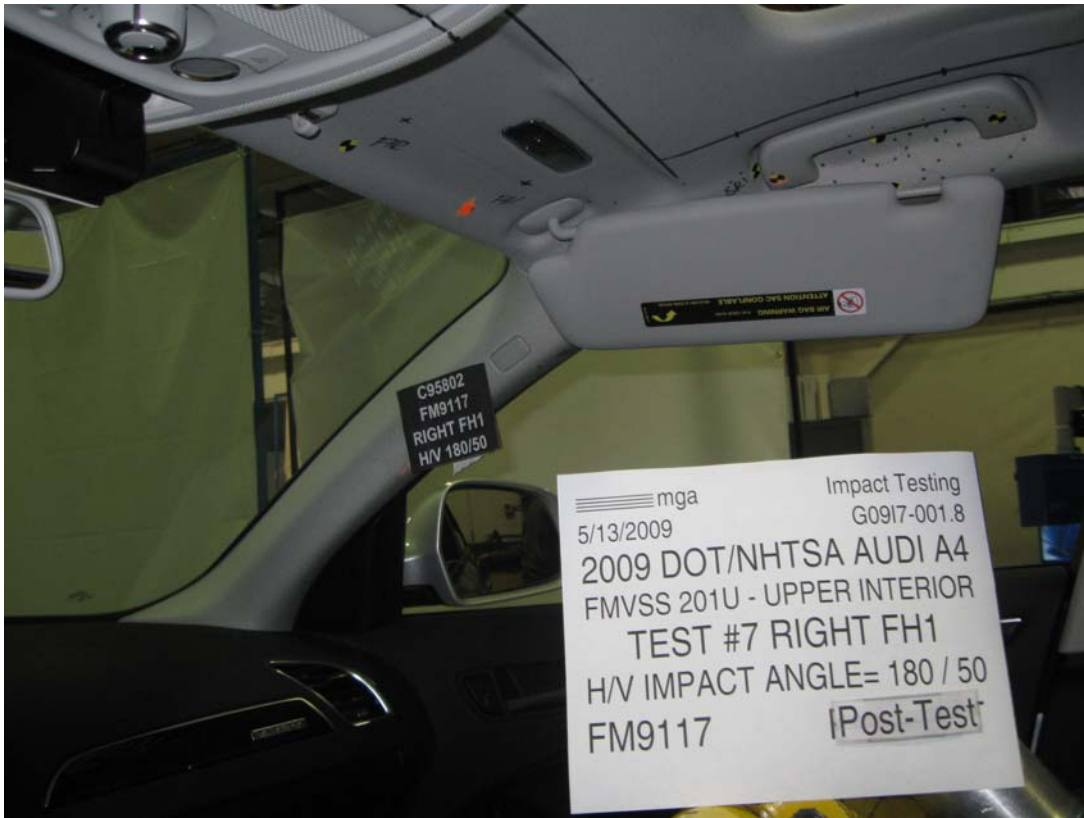



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:Audi A4/DOT / NHTSA/2009

**GENERAL TEST PARAMETERS:**

Test Number:#7

Target (Vehicle Side): FH1Right

Temperature:21.4C

MGA Test Reference No.:FM9117

Humidity:49.7%

Approach Horizontal Angles:180°

Time of Test:5:18:01 PM

Approach Vertical Angles:50°

FMH Serial No:[035]

Additional Description:

**TEST RESULTS:**

HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
629	614	6.4	23.9	6	4 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J35919	-95.6	1.06	1.06
Y	6	J22664	94.3	0.85	0.85
Z	7	J35924	92.8	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):

No visible damage





Recorded By: \_\_\_\_\_ Approved By\*: Aben A. Kalito Date: 5/13/2009



\*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9117


Target Location: FH1, Right Side


Test Date: 5/13/2009

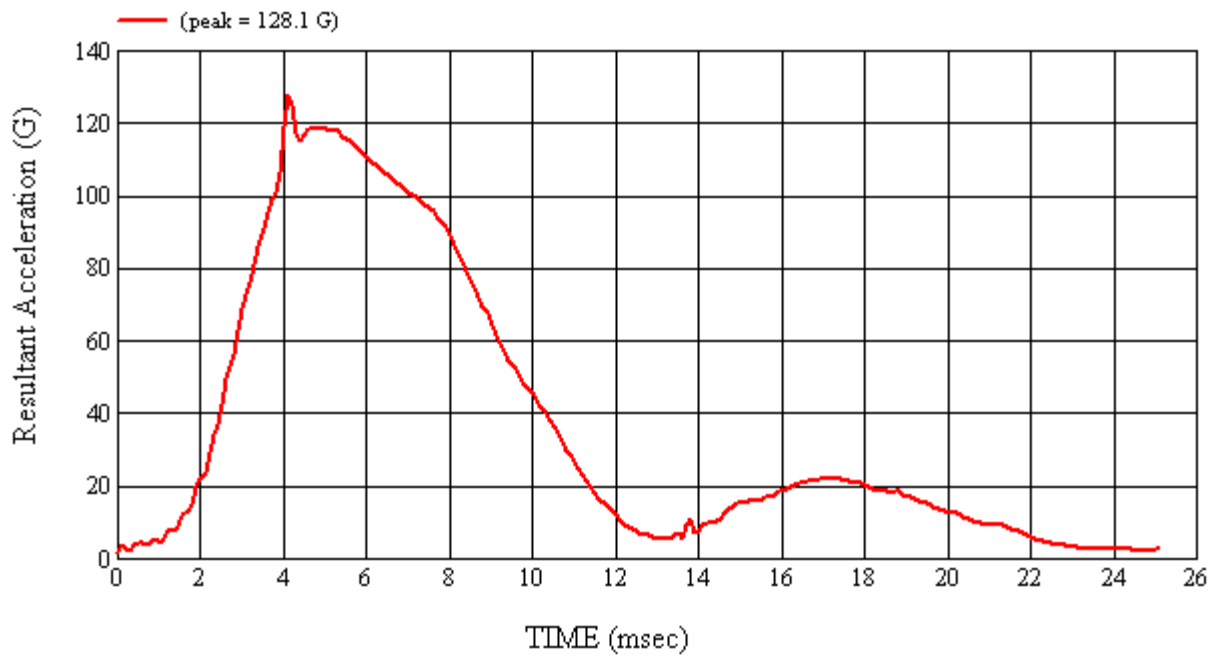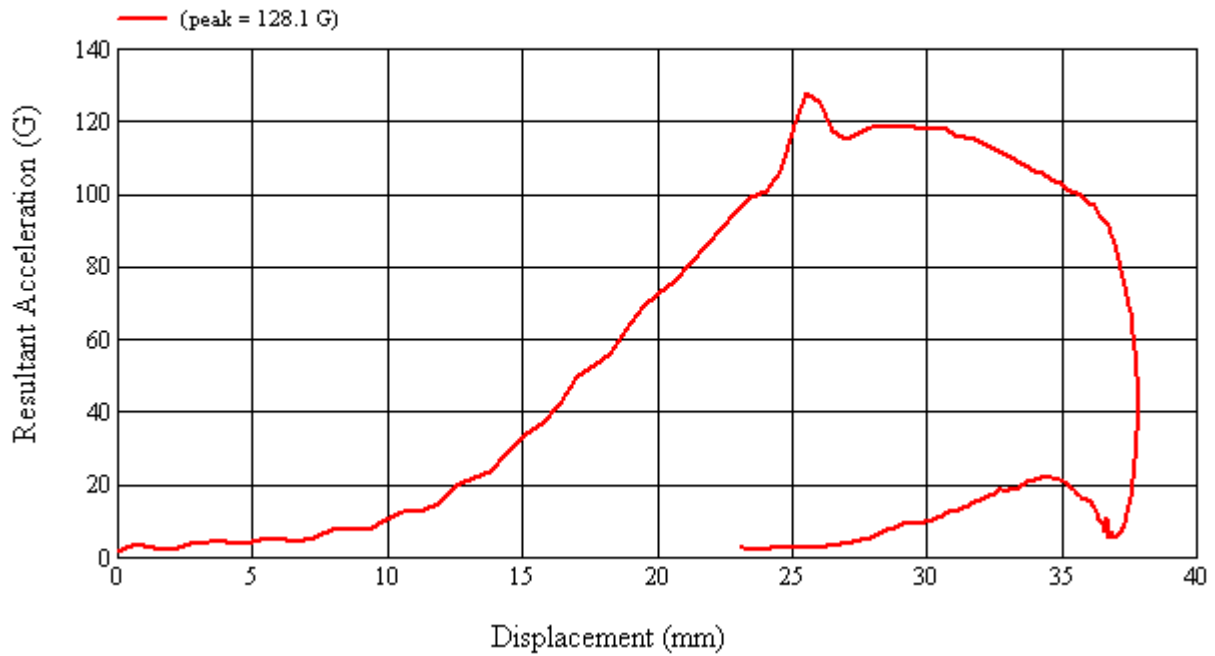

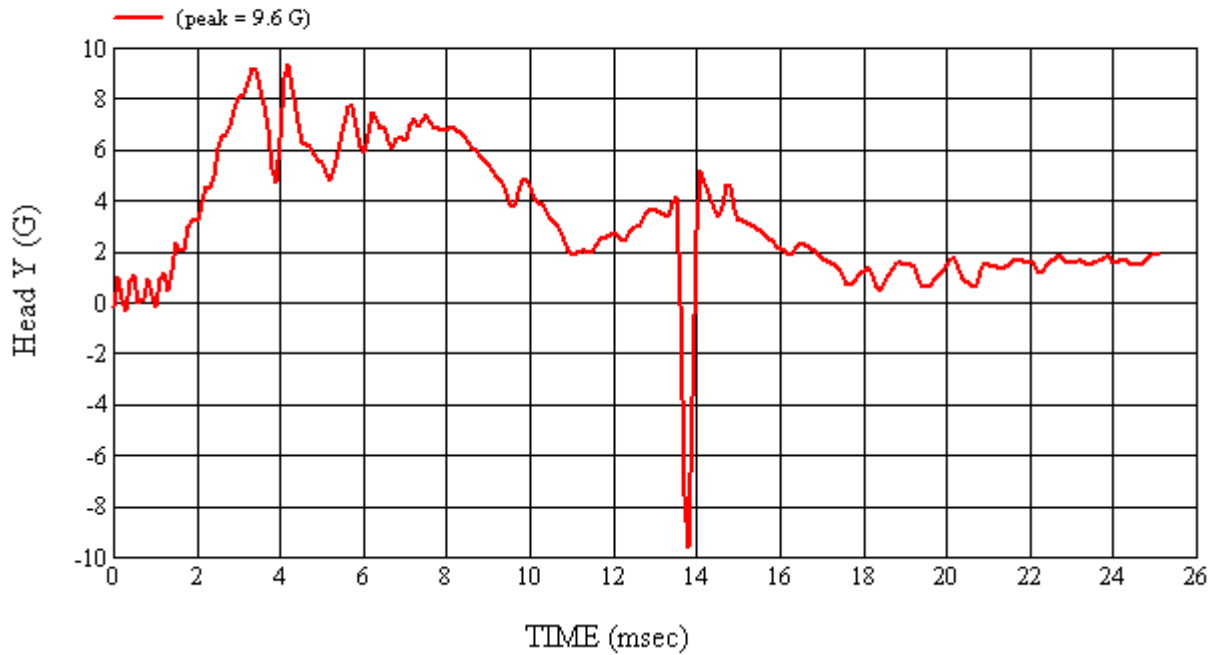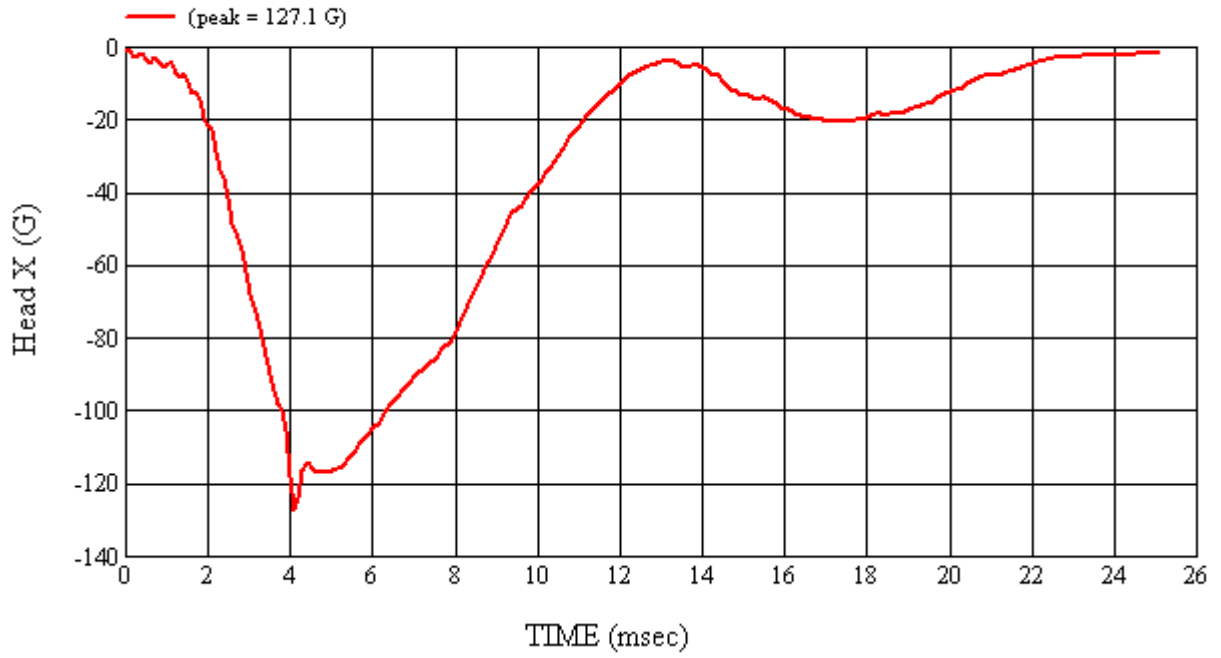

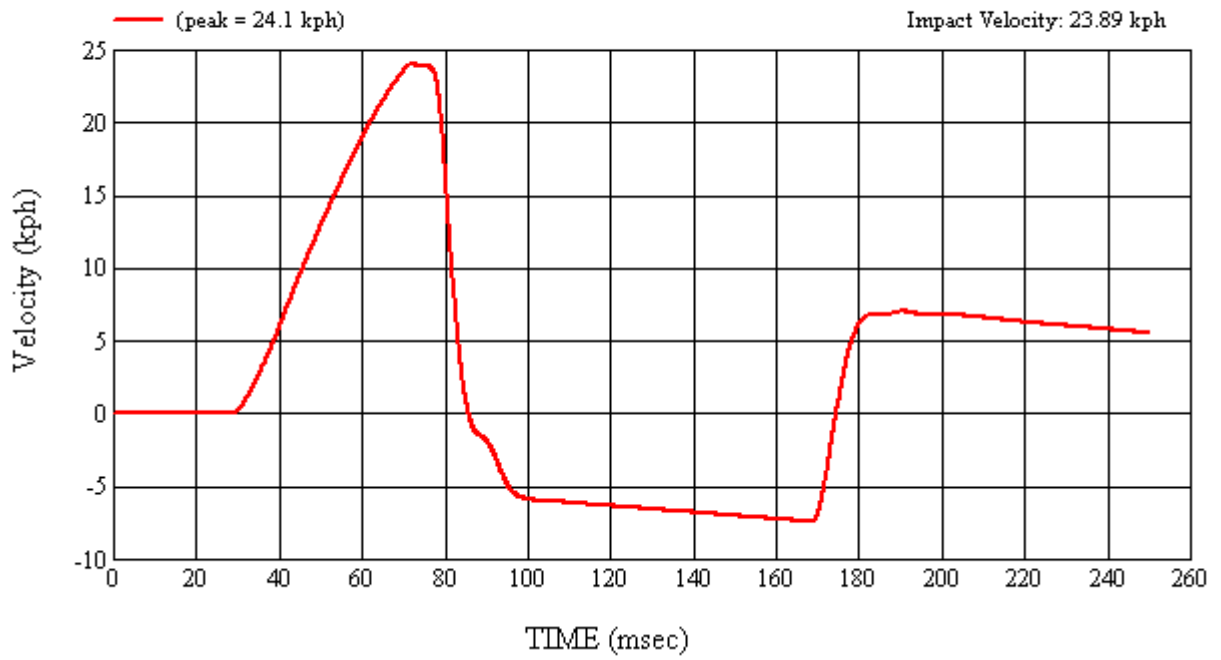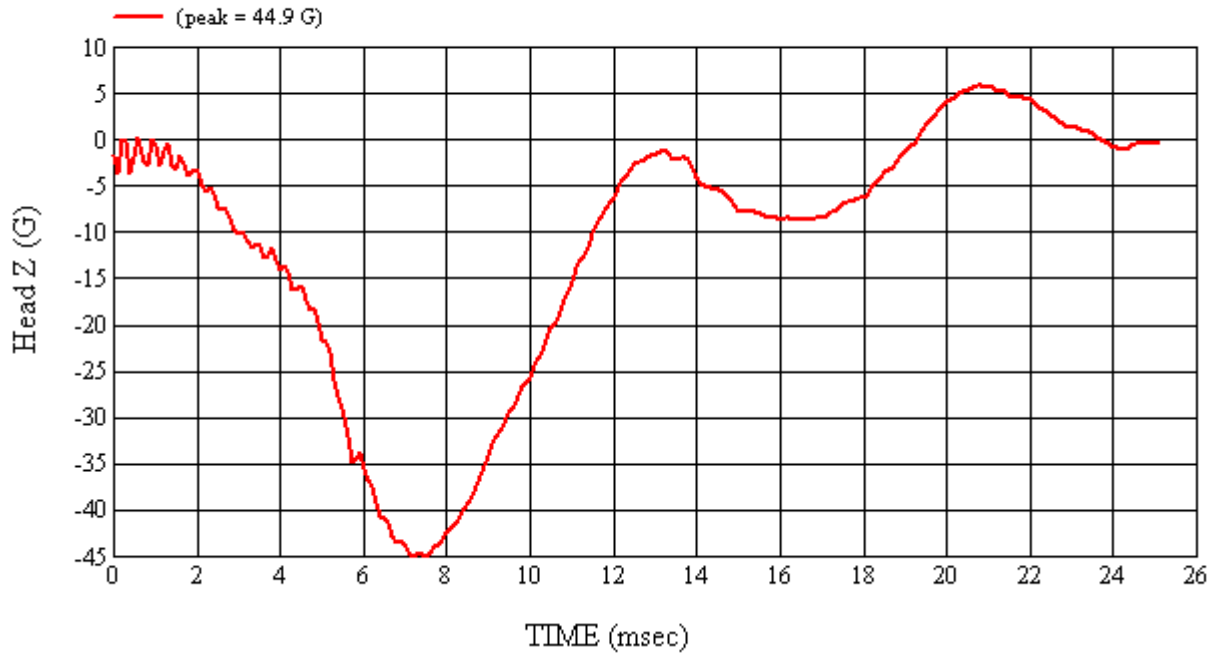

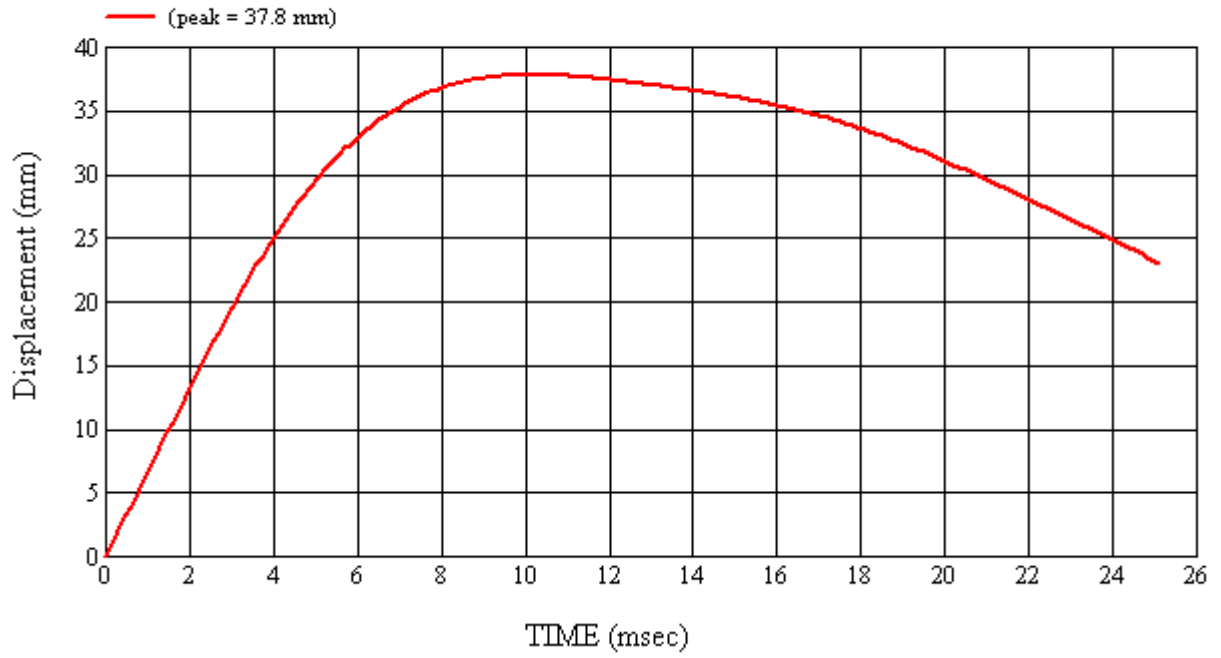

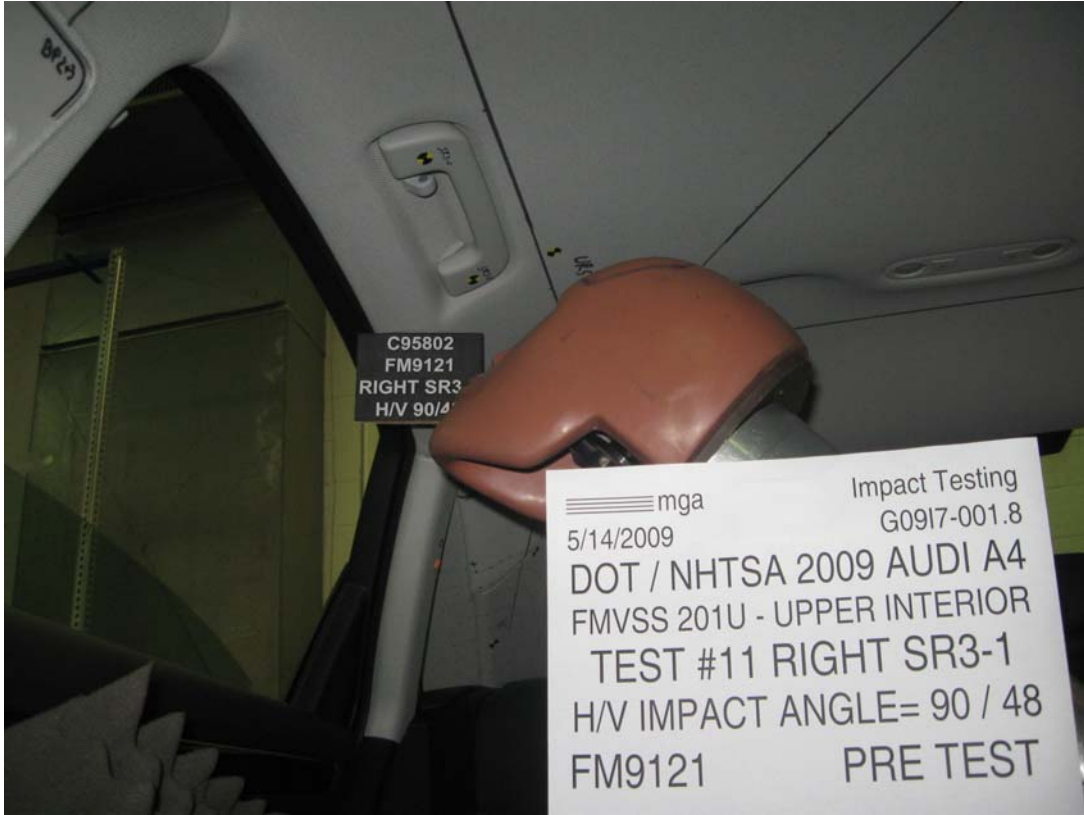







**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#11

Target (Vehicle Side): SR3-1Right

Temperature:20.8C

MGA Test Reference No.:FM9121

Humidity:48.7%

Approach Horizontal Angles:90°

Time of Test:1:30:50 PM

Approach Vertical Angles:48°

FMH Serial No:[035]

Additional Description:

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
313	195	10.9	19.2	33	7 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J35919	-95.6	1.06	1.06
Y	6	J22664	94.3	0.85	0.85
Z	7	J35924	92.8	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/14/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9121


Target Location: SR3-1, Right Side



Test Date: 5/14/2009

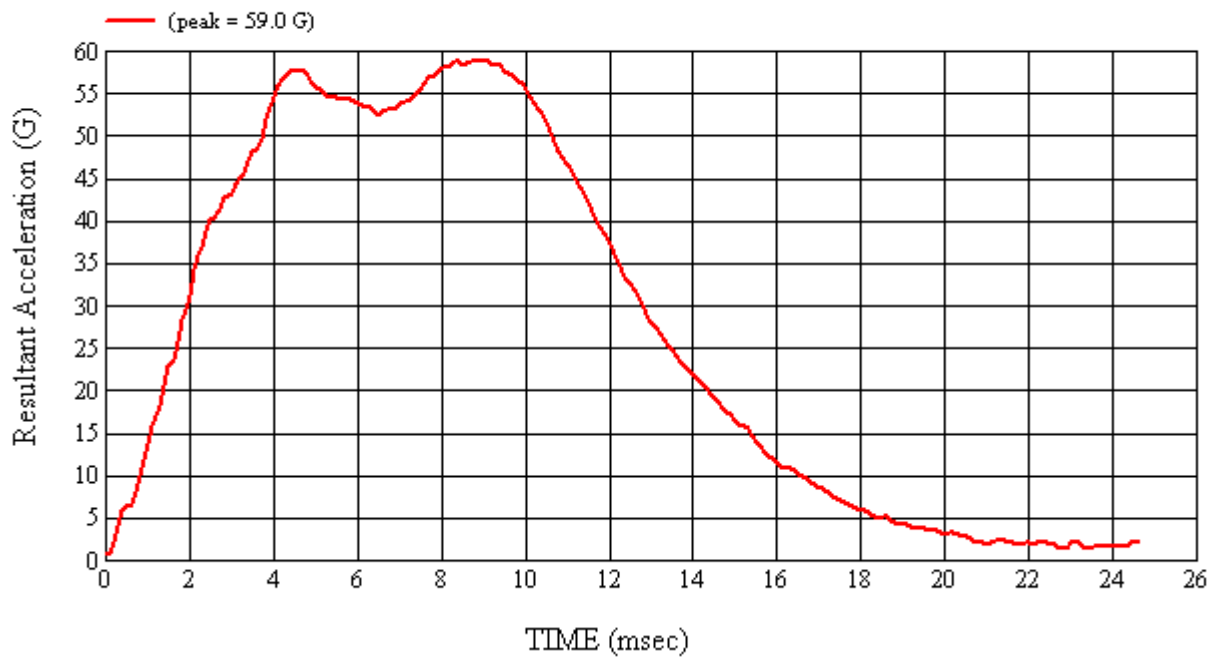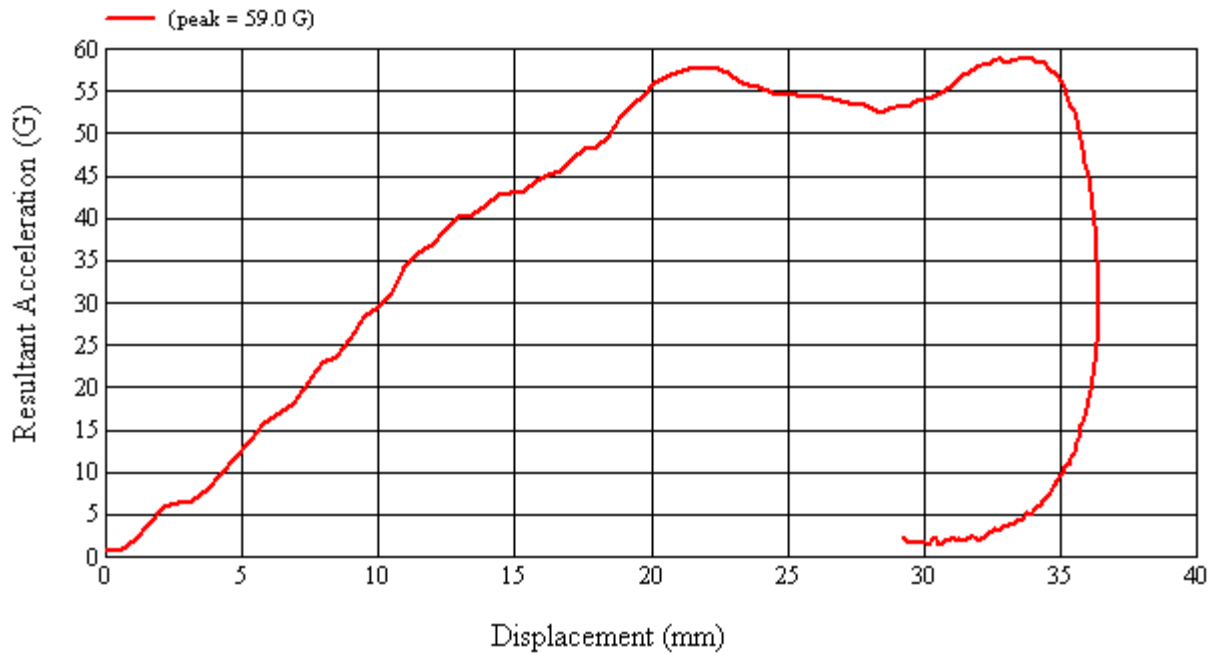

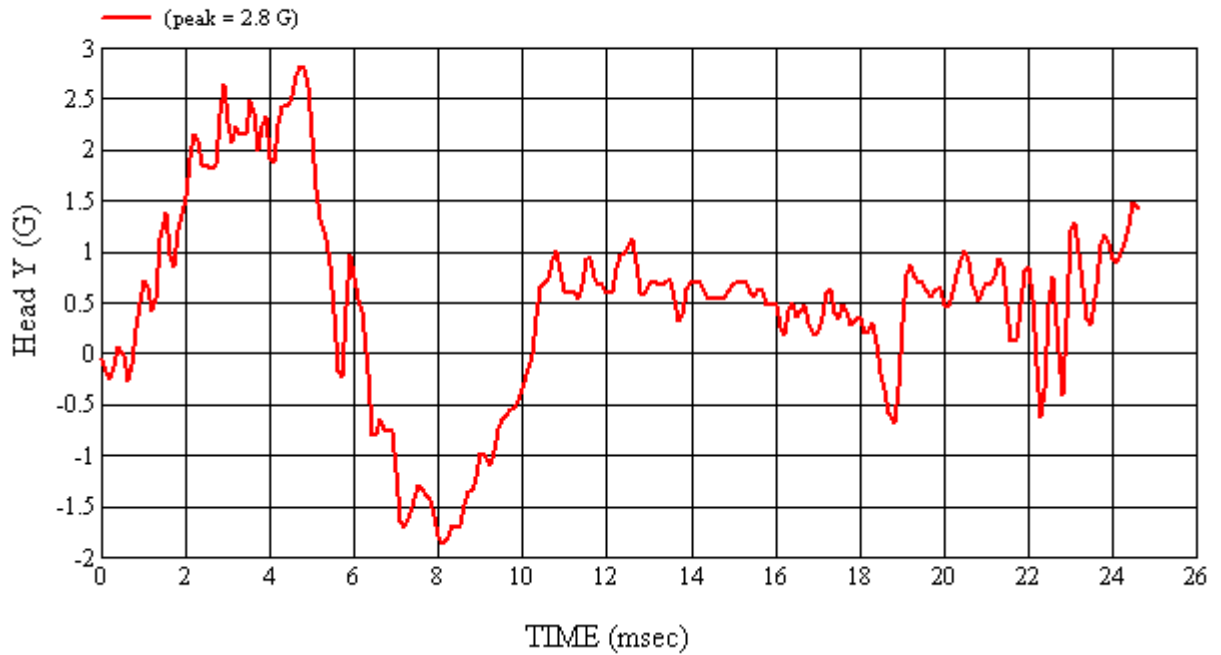
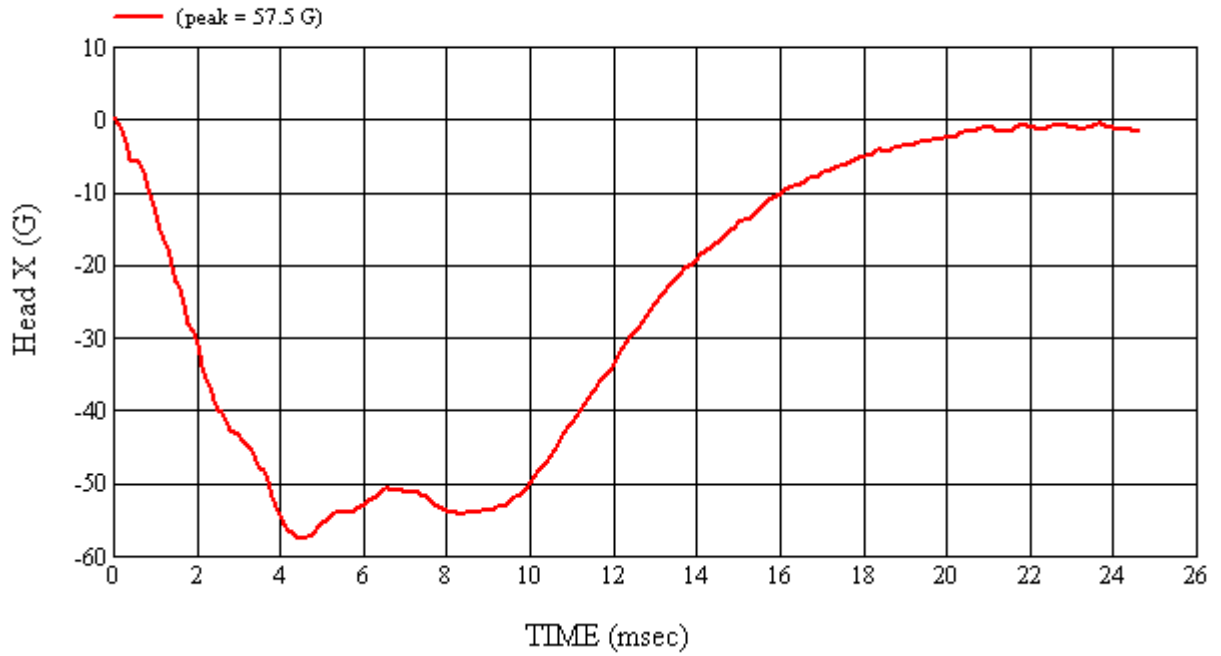


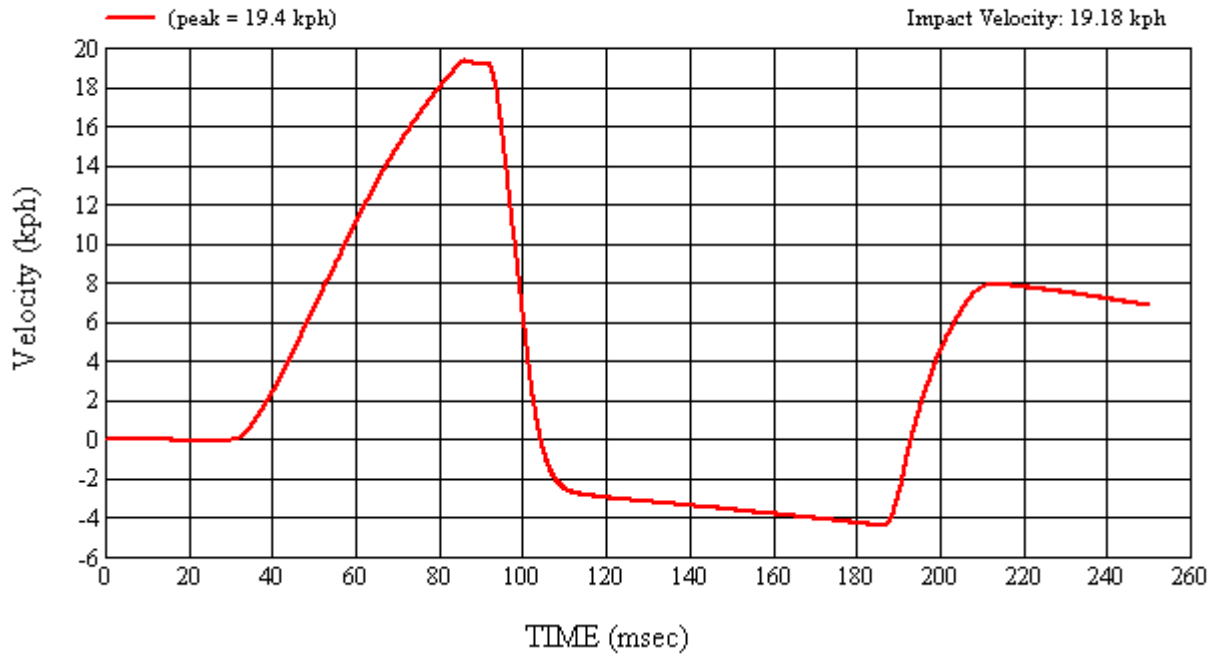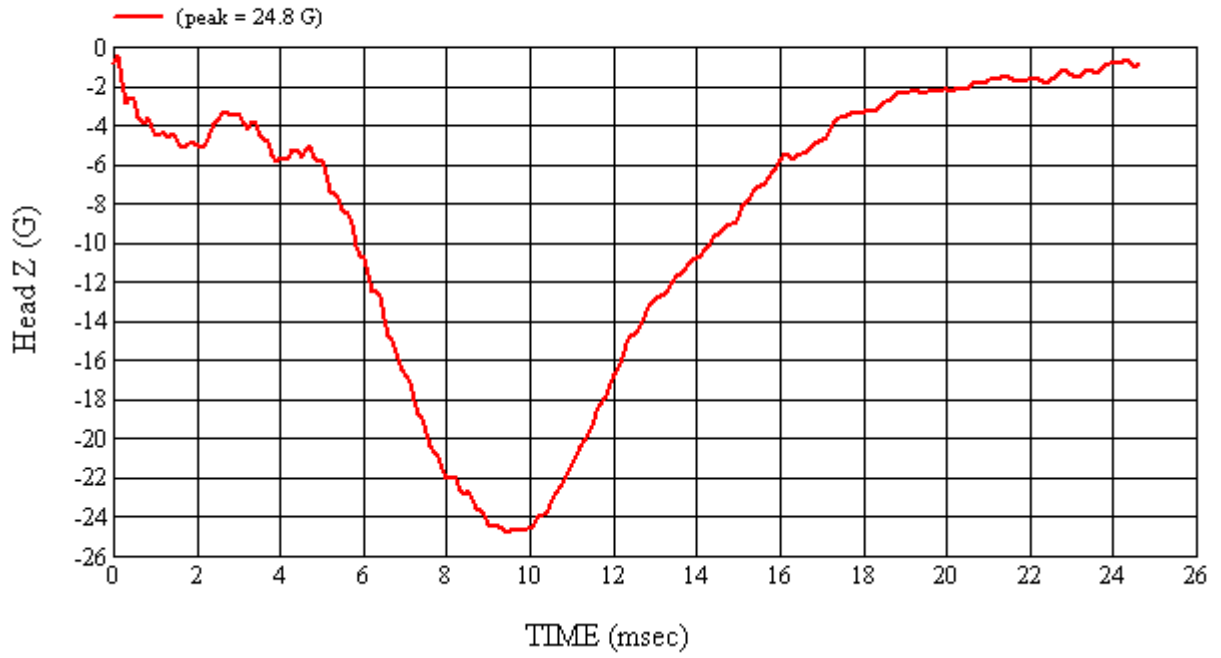

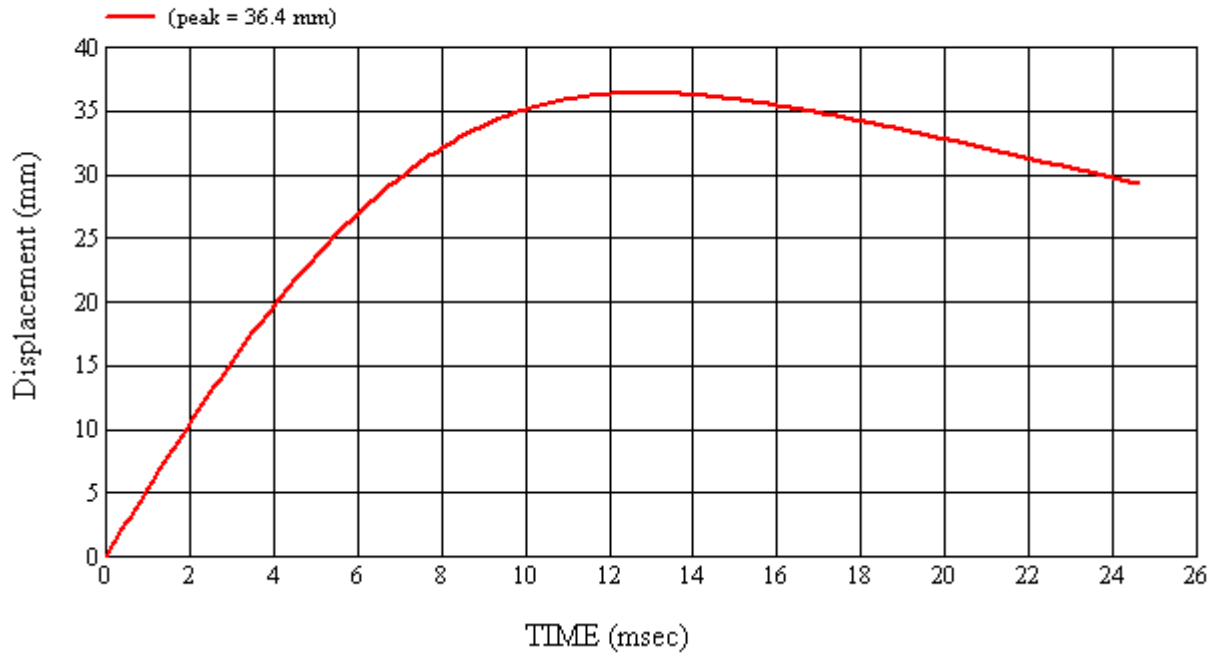

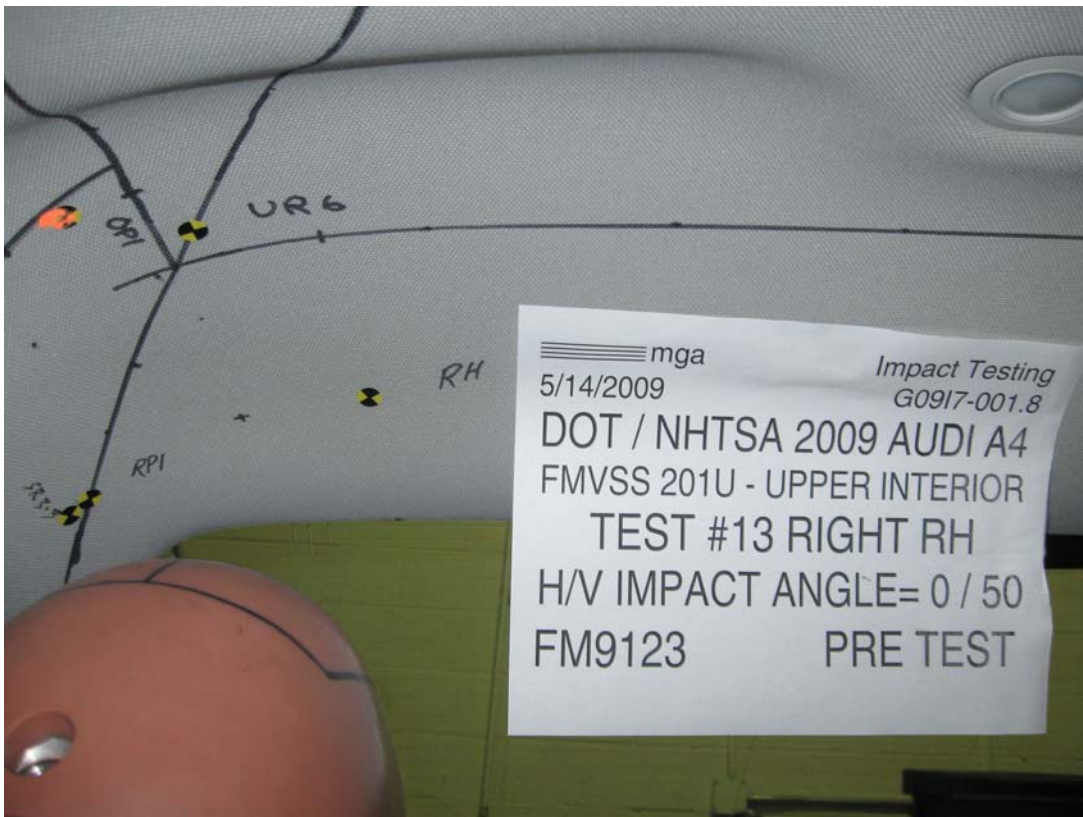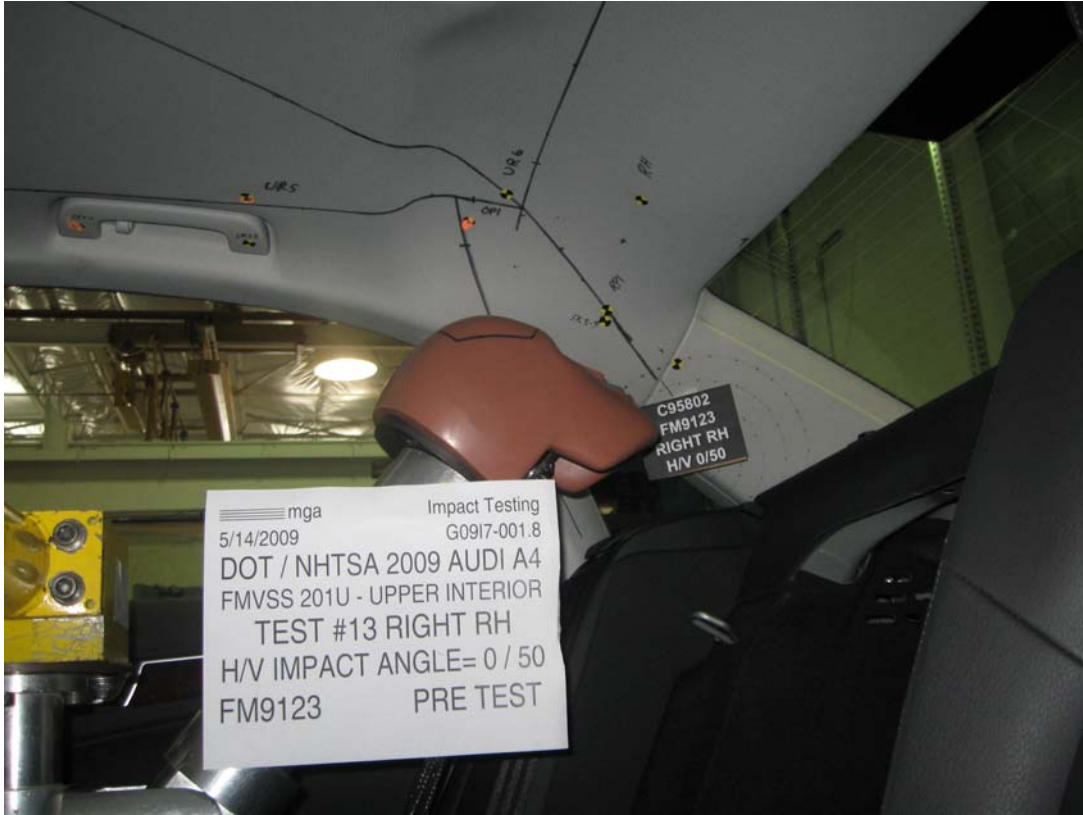



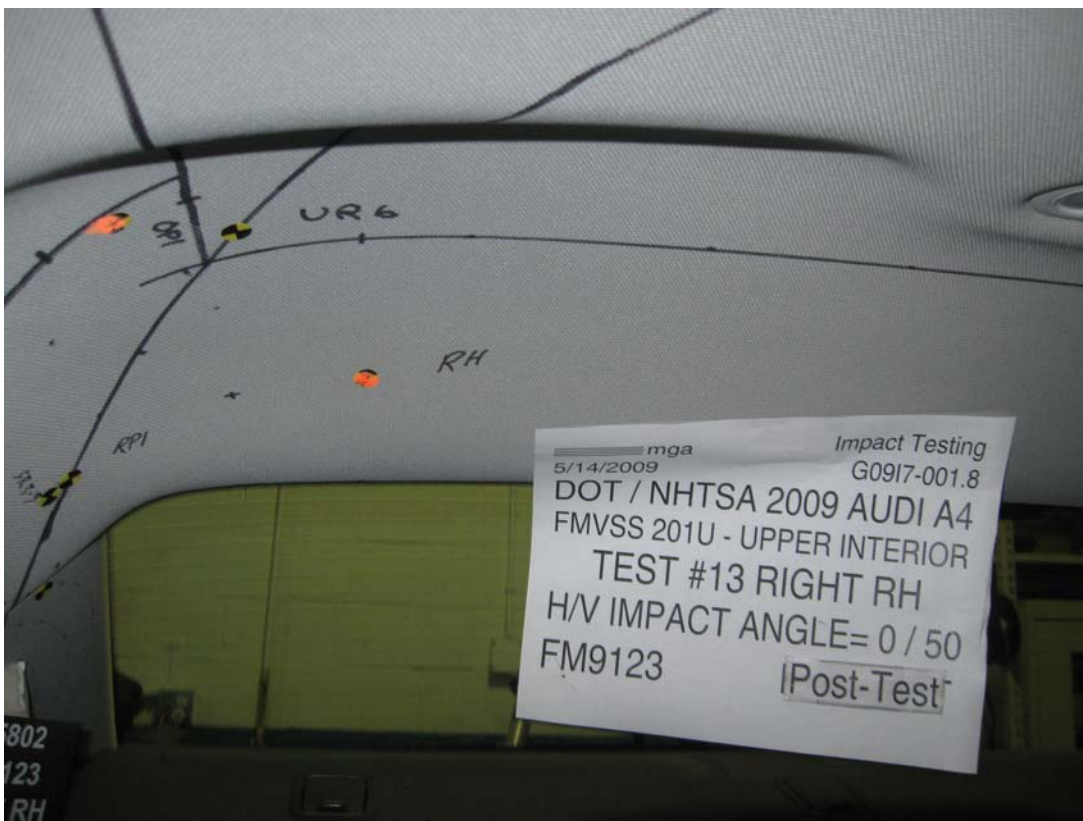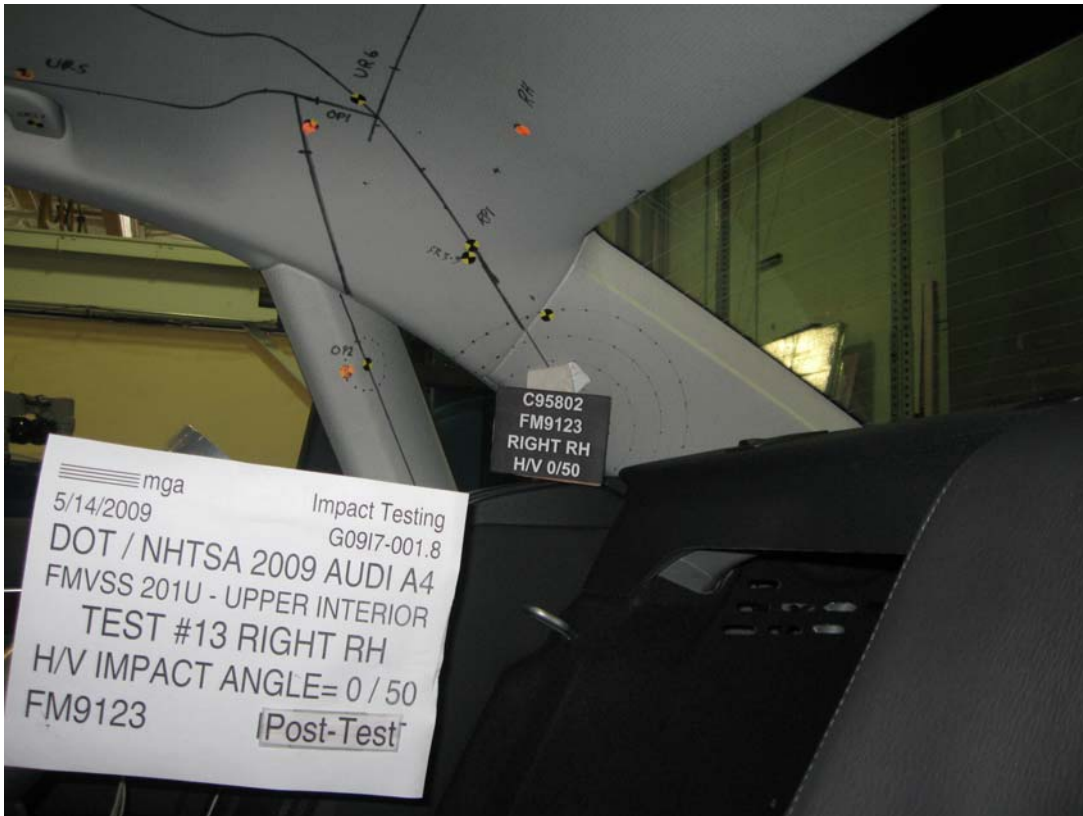



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#13

Target (Vehicle Side): RHRight

Temperature:20.8C

MGA Test Reference No.:FM9123

Humidity:45.7%

Approach Horizontal Angles:0°

Time of Test:3:30:04 PM

Approach Vertical Angles:50°

FMH Serial No:[038]

Additional Description:

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
708	717	8.5	23.9	13	4 Right

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J22700	-94	1.06	1.06
Y	6	J36197	106.3	0.85	0.85
Z	7	J36353	97.5	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/14/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9123


Target Location: RH, Right Side


Test Date: 5/14/2009

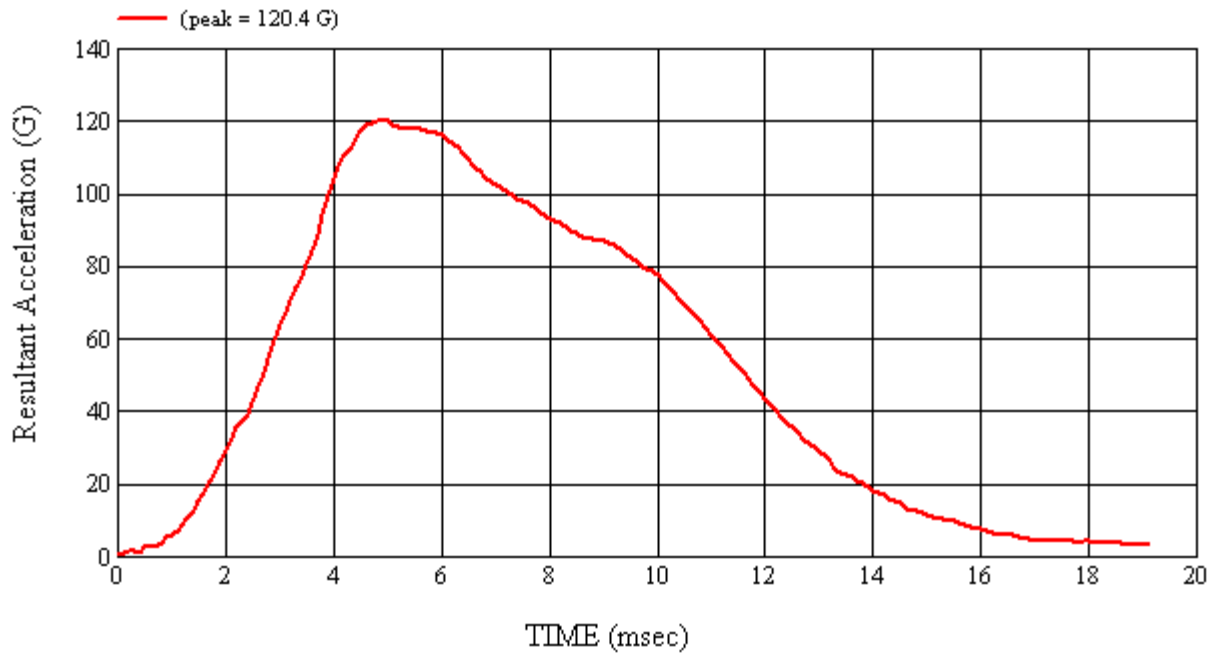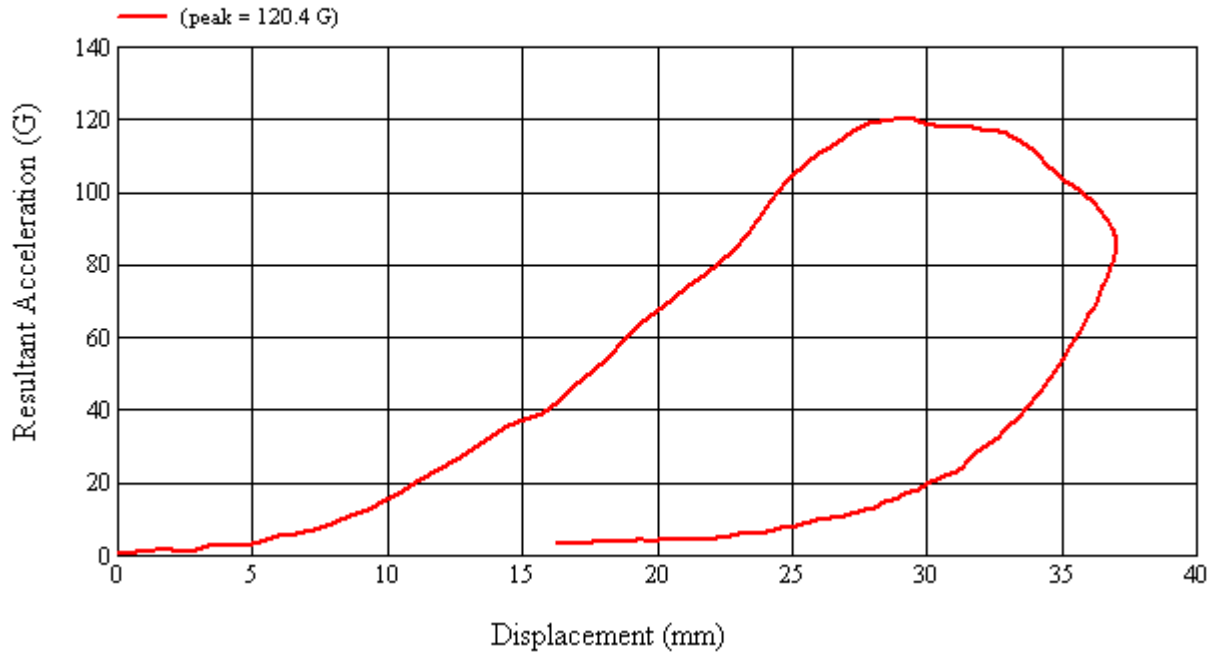

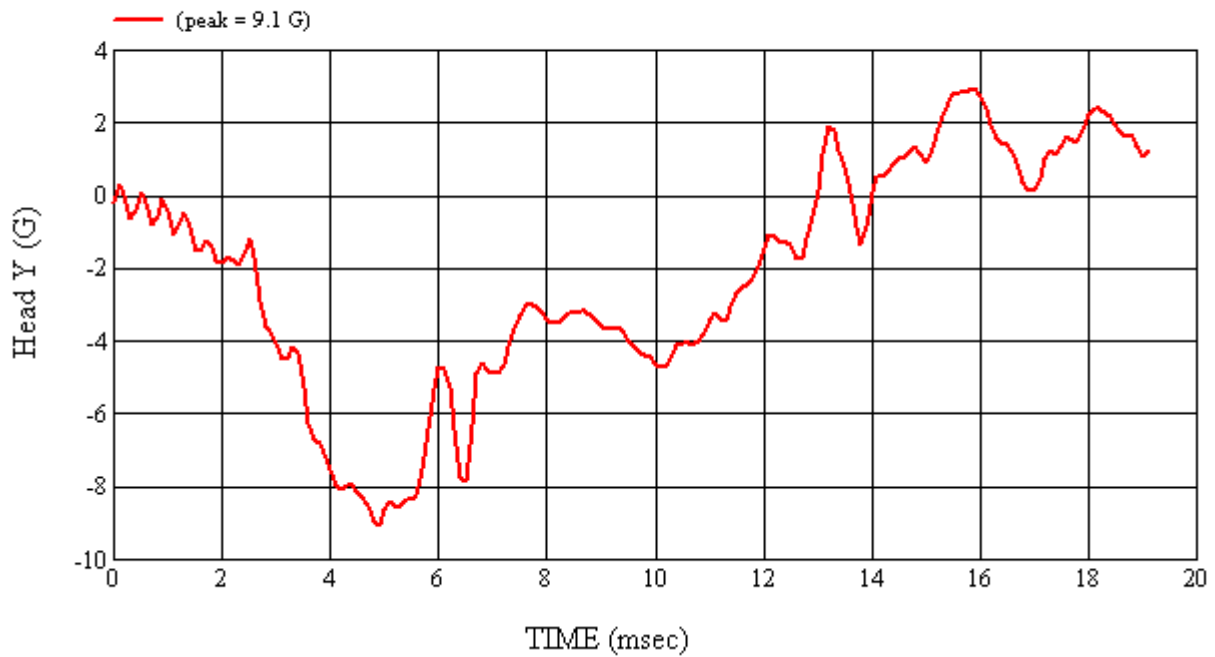
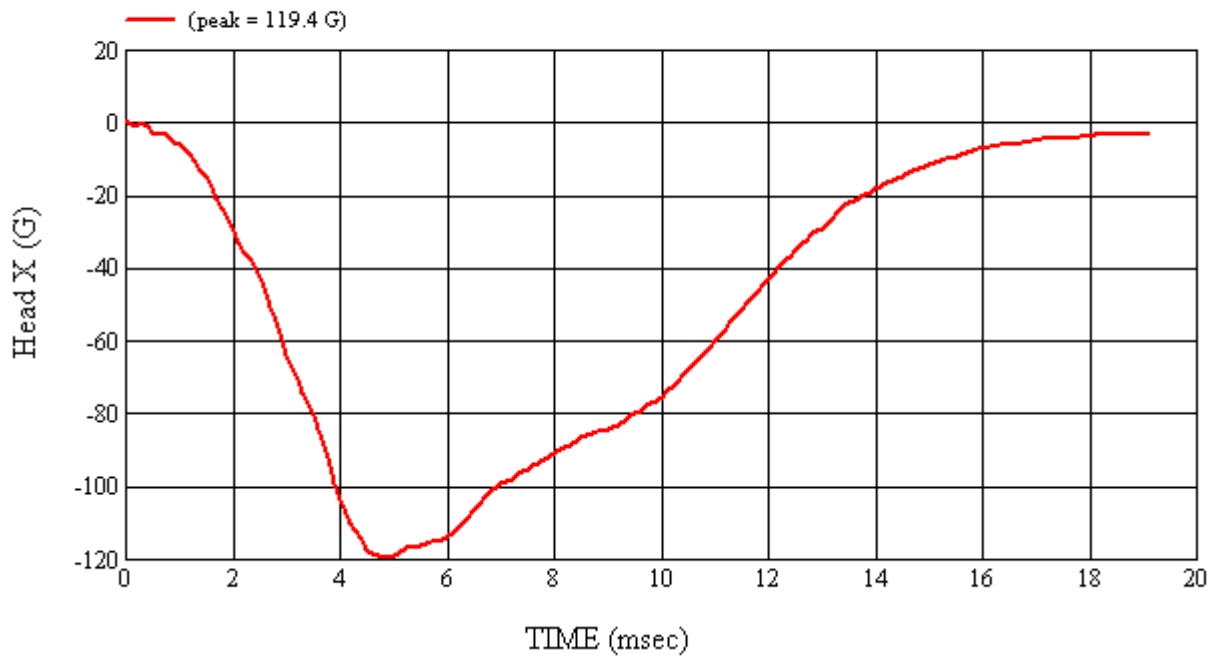


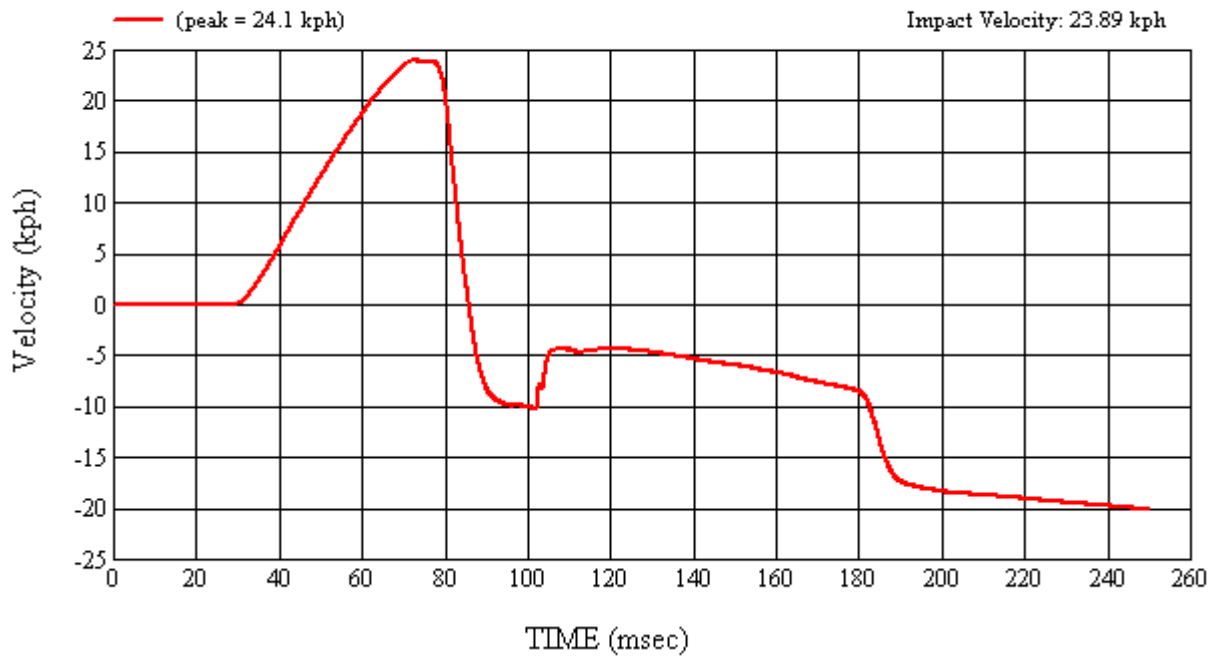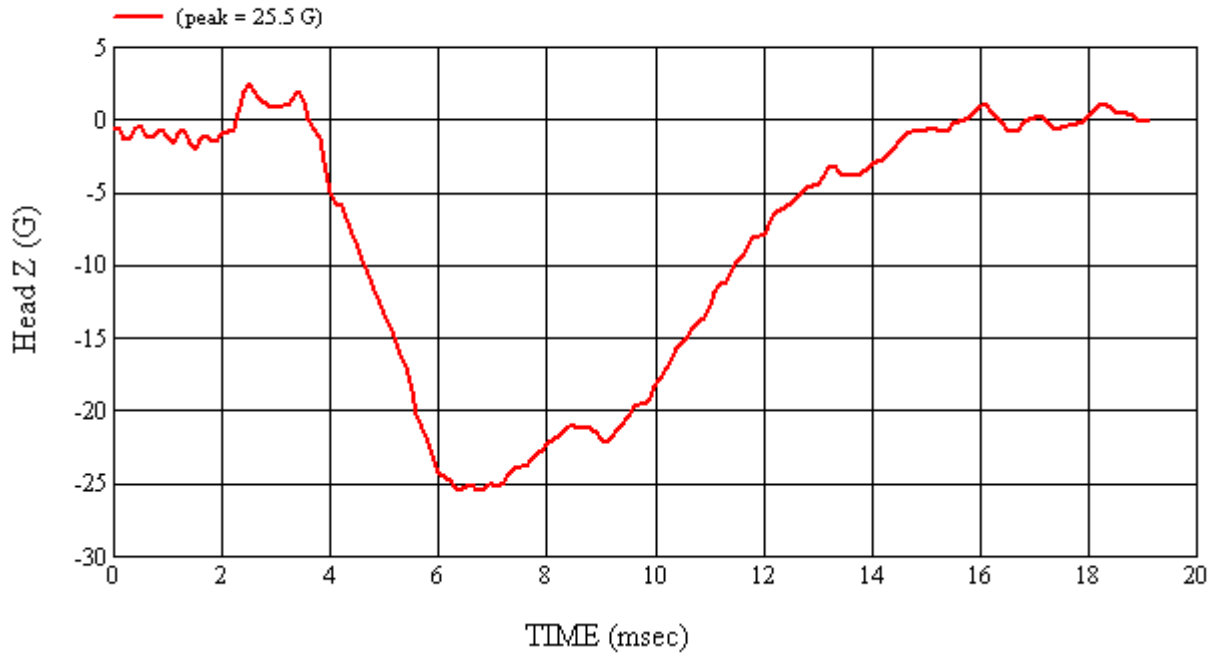

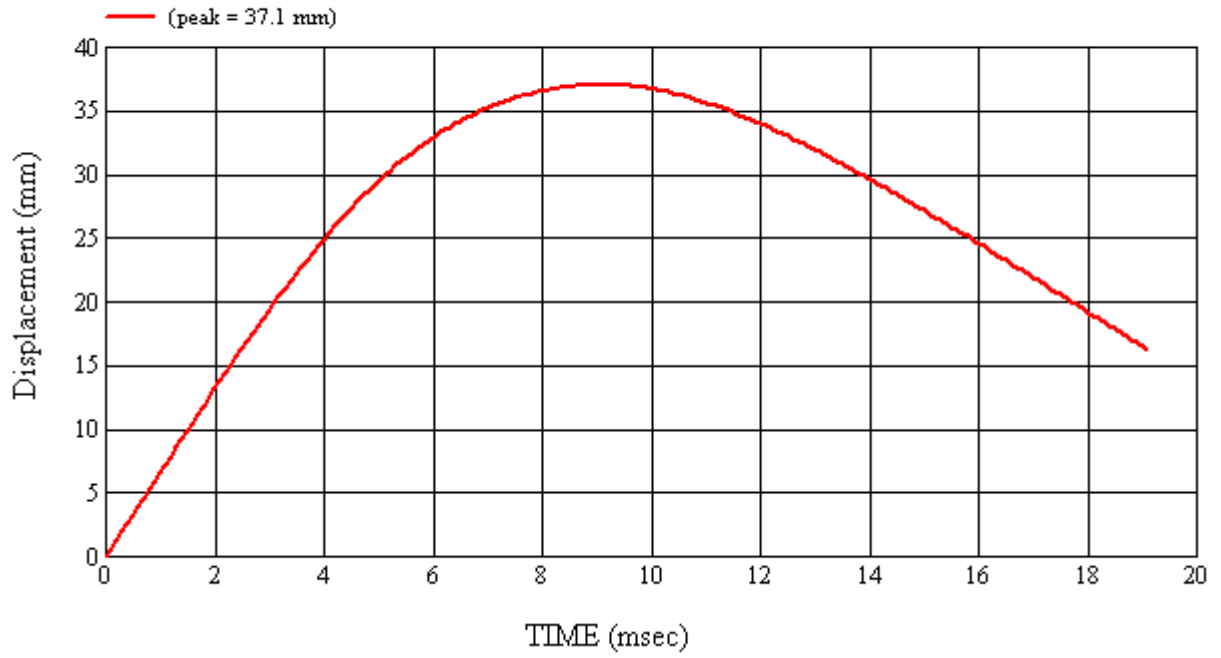


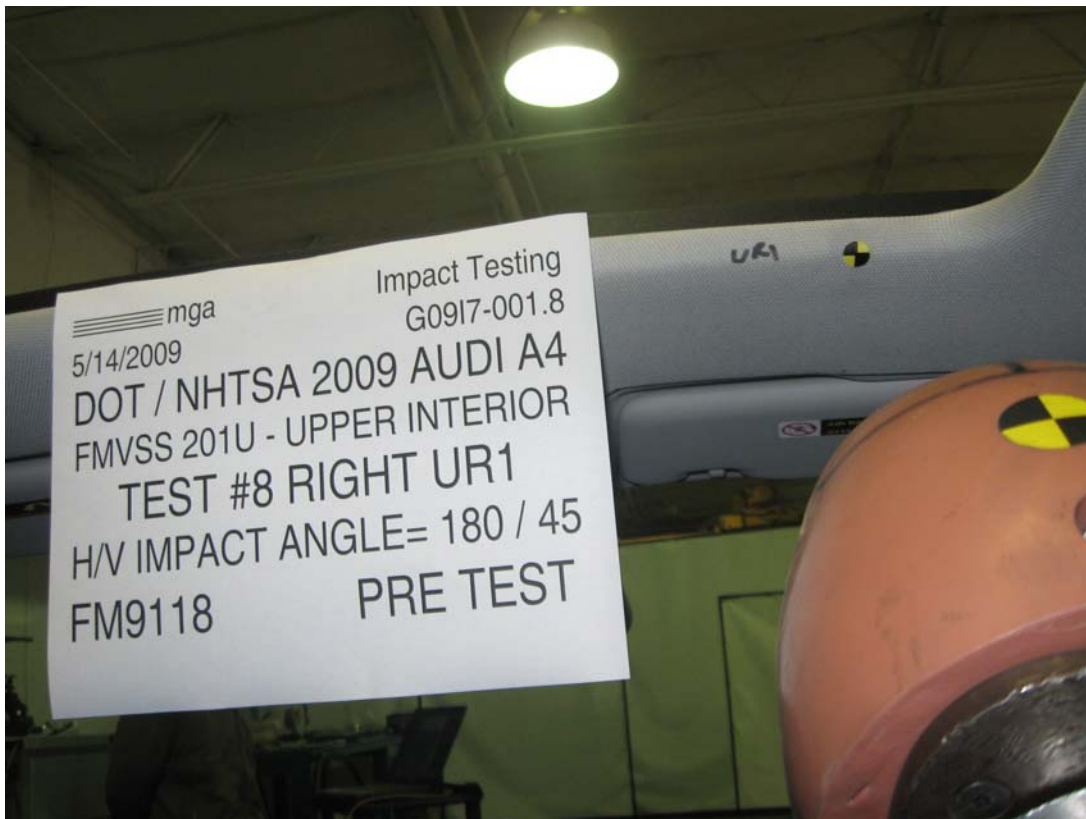



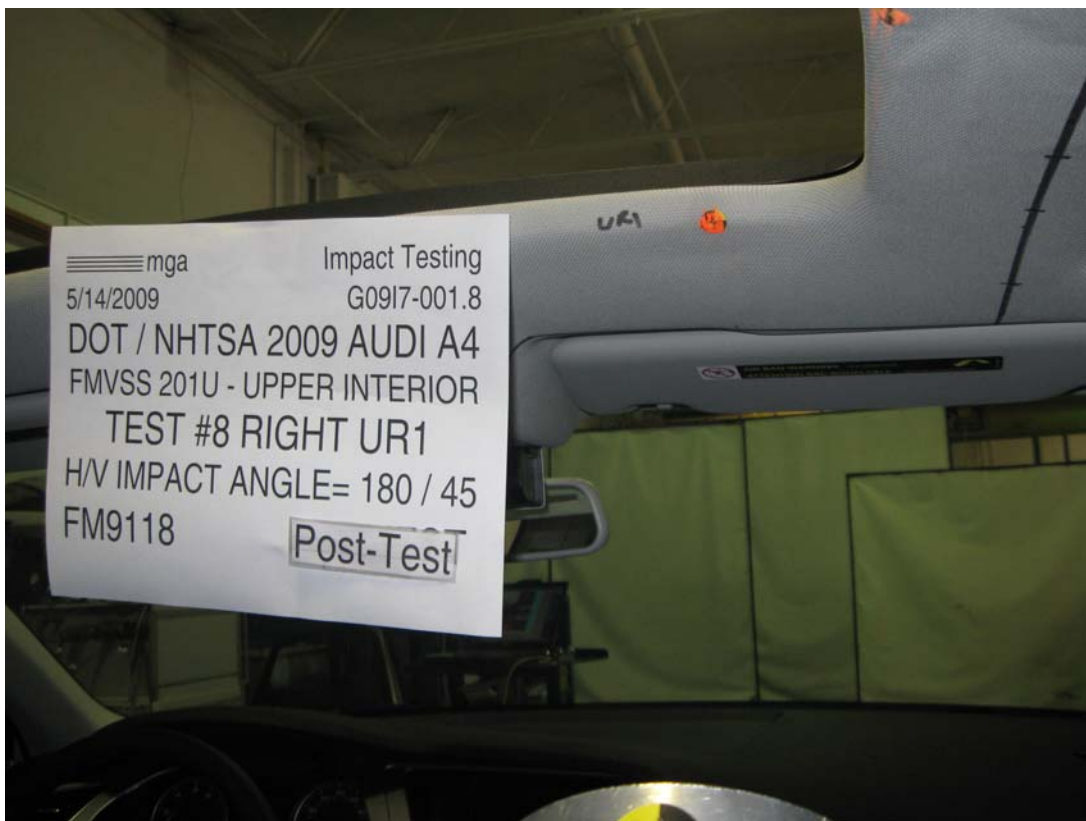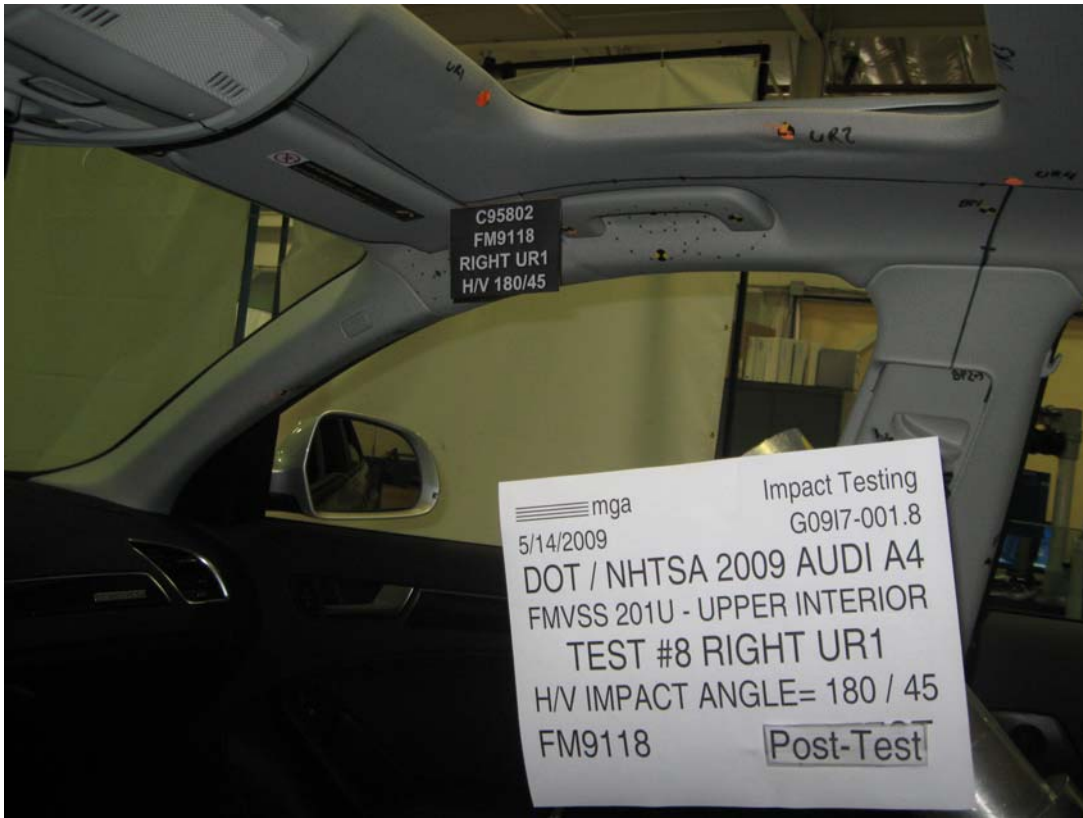



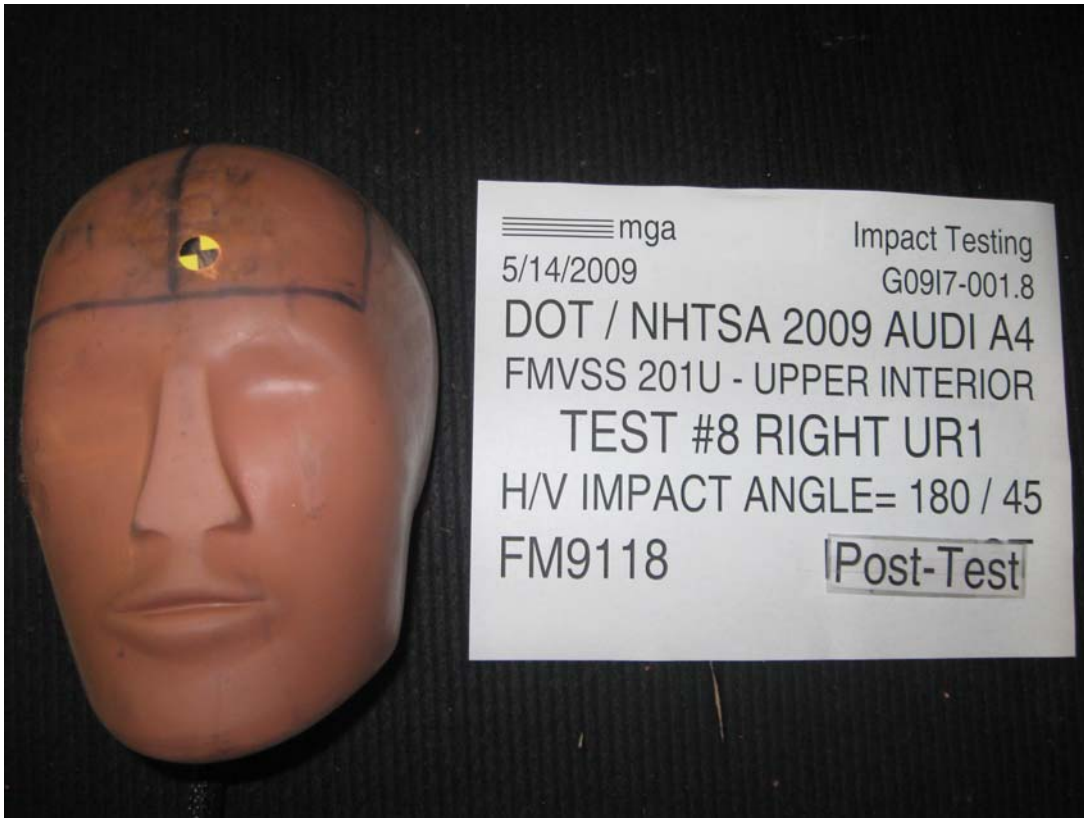

**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#8

Target (Vehicle Side): UR1Right

Temperature:20.9C

MGA Test Reference No.:FM9118

Humidity:64.9%

Approach Horizontal Angles:180°

Time of Test:9:21:45 AM

Approach Vertical Angles:45°

FMH Serial No:[035]

Additional Description:Location: front sunroof

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
426	344	15.2	23.9	13	8 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J35919	-95.6	1.06	1.06
Y	6	J22664	94.3	0.85	0.85
Z	7	J35924	92.8	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



deformation to headliner; large crack to plastic sunroof frame



Recorded By:  Approved By\*:  Date: 5/14/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9118


Target Location: UR1, Right Side

Test Date: 5/14/2009

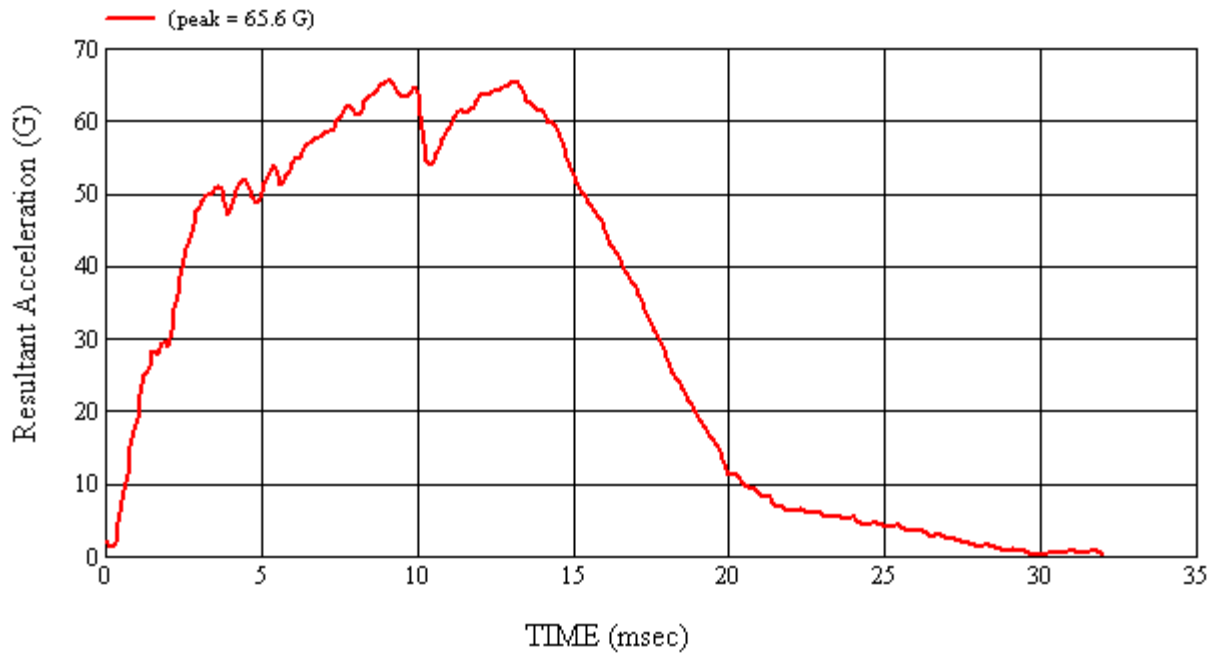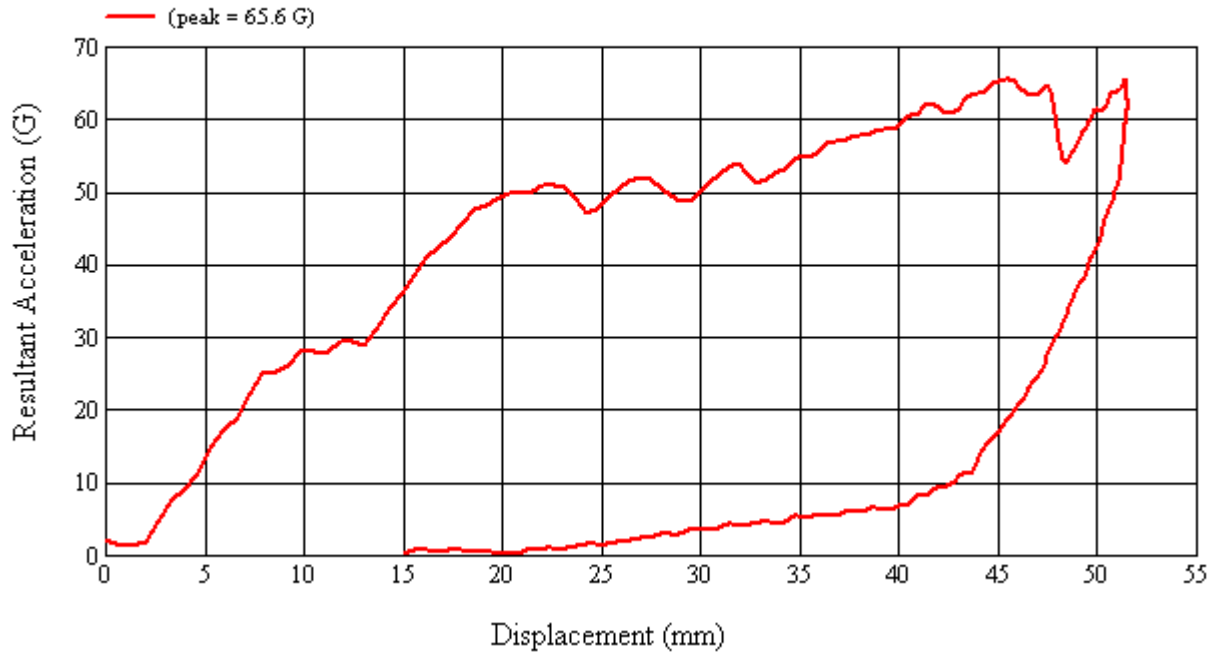


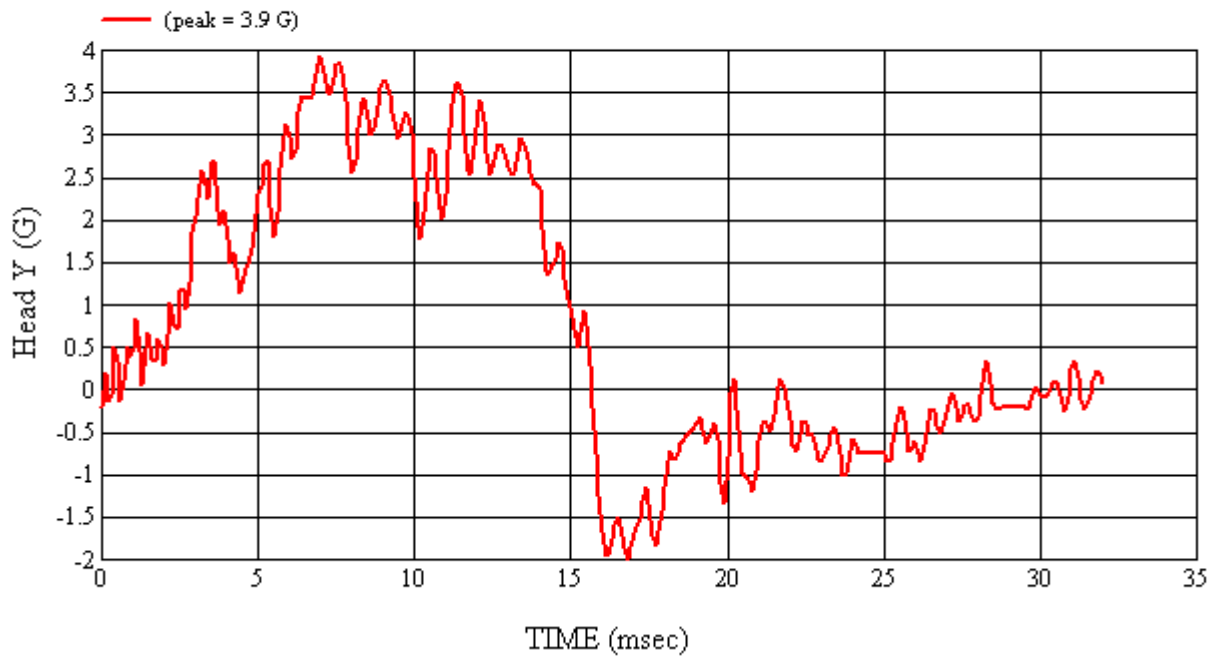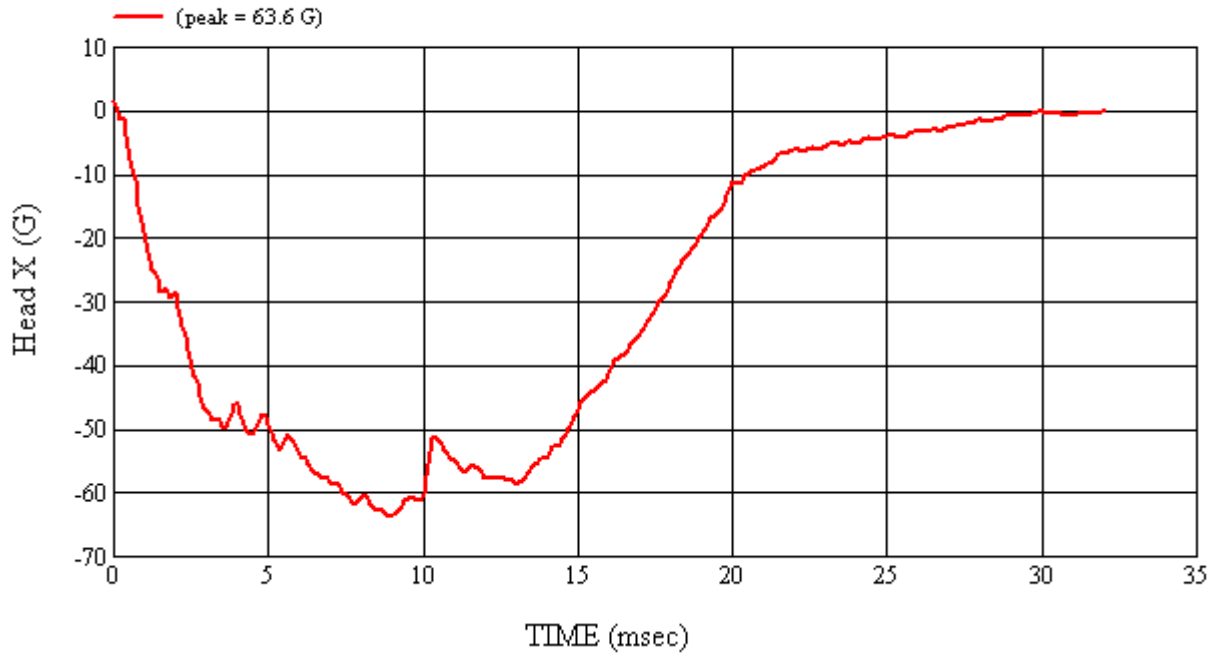


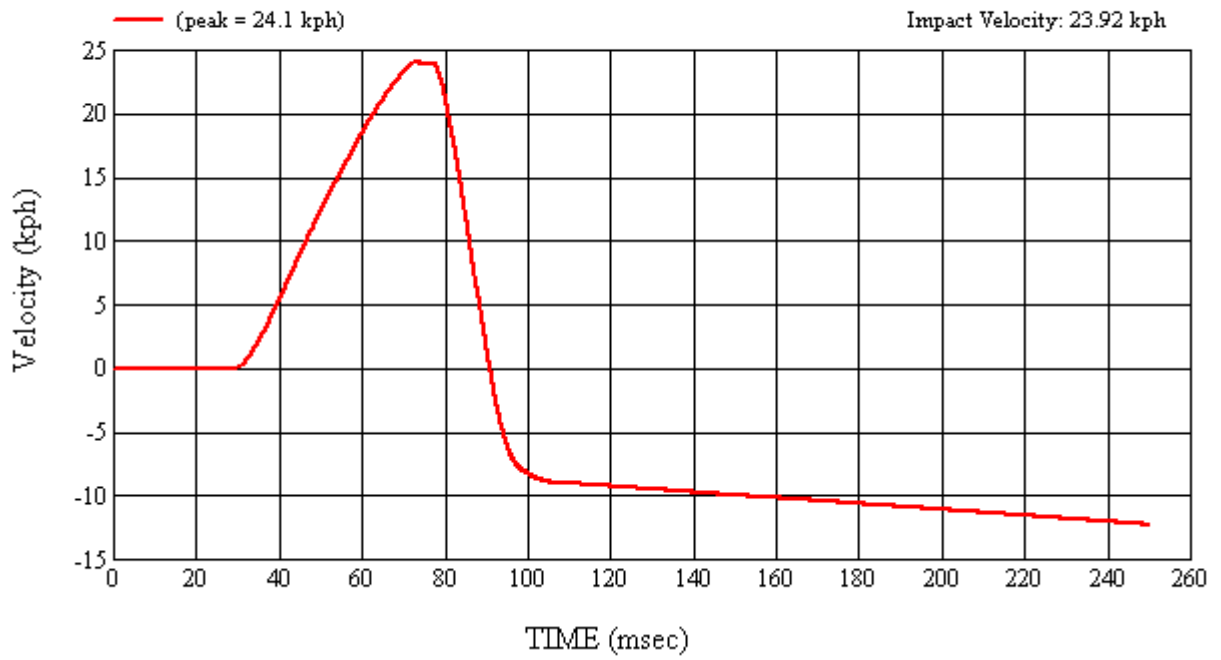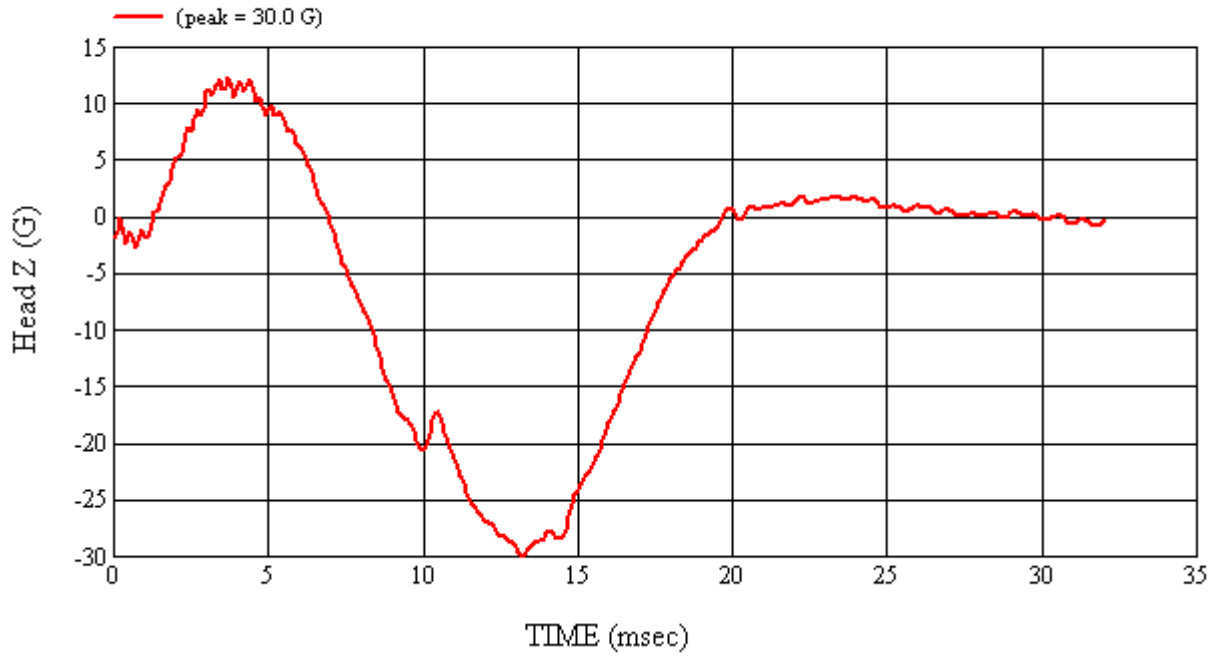

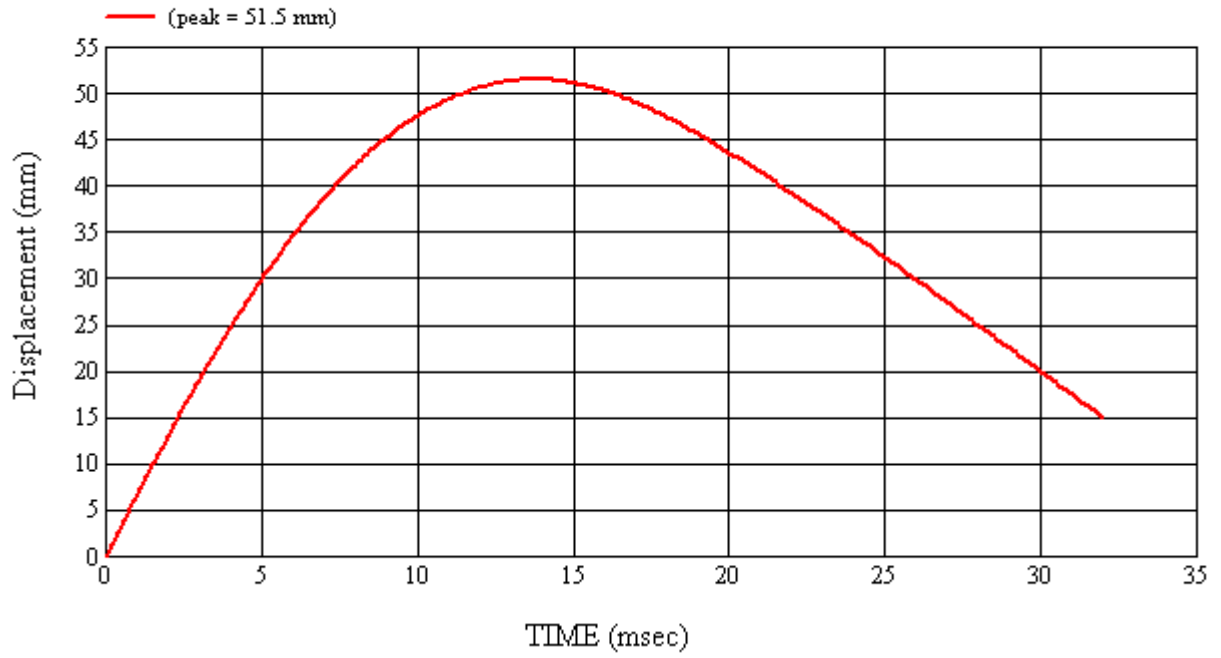



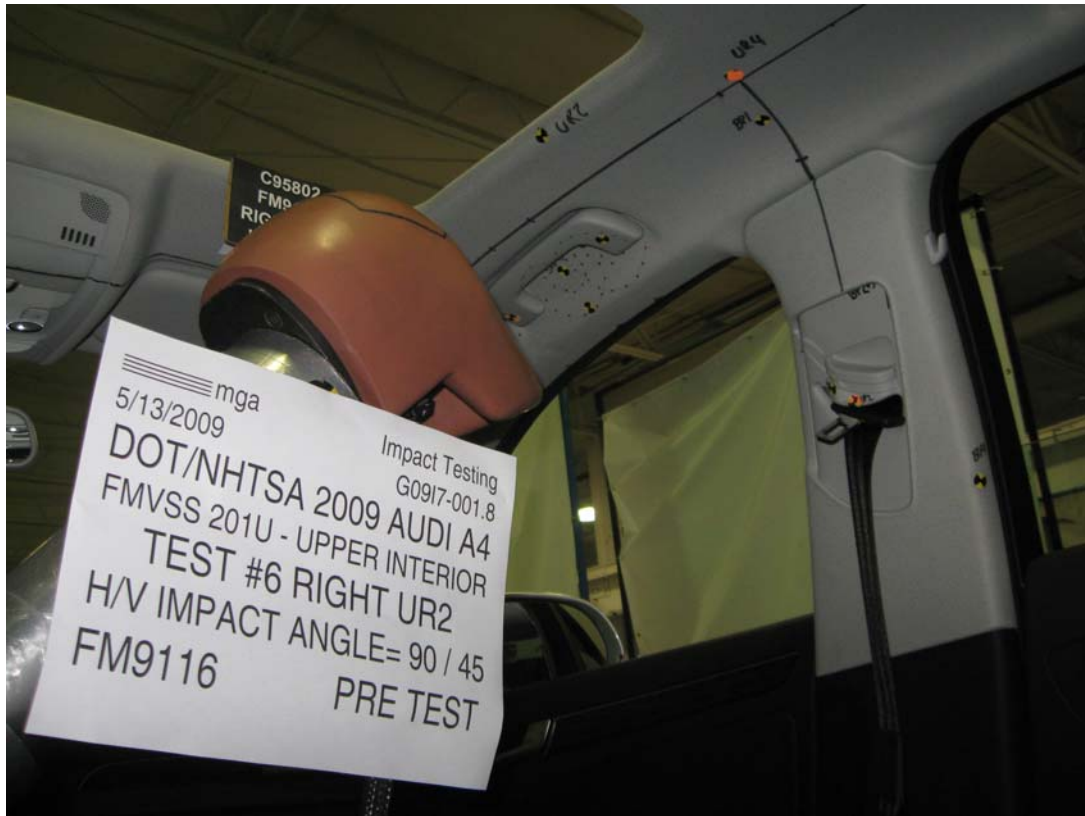

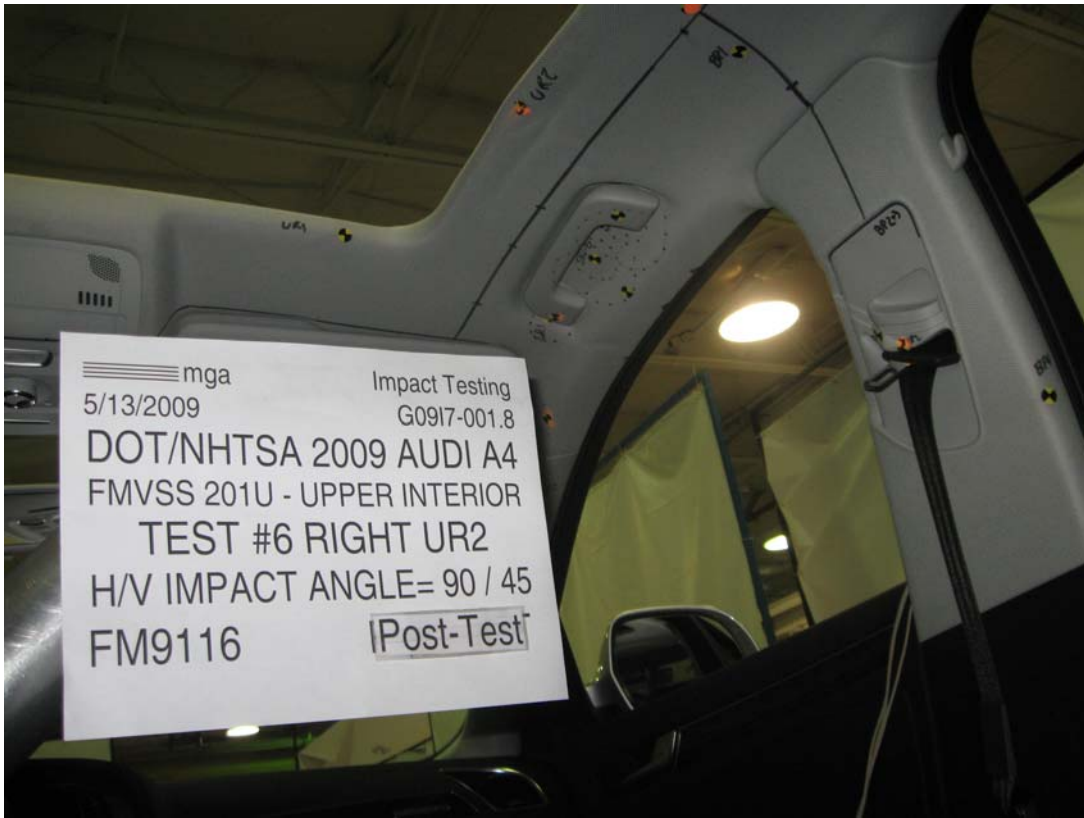



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#6

Target (Vehicle Side): UR2Right

Temperature:21.2C

MGA Test Reference No.:FM9116

Humidity:50.0%

Approach Horizontal Angles:90°

Time of Test:4:51:07 PM

Approach Vertical Angles:45°

FMH Serial No:[038]

Additional Description:Location: right side of sunroof

**TEST RESULTS:**

HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
419	334	14.3	23.8	14	3 Right

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J22700	-94	1.06	1.06
Y	6	J36197	106.3	0.85	0.85
Z	7	J36353	97.5	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):

Deformation to headliner; slight deformation to the sunroof track





Recorded By: \_\_\_\_\_ Approved By\*: Aben A. Kalito Date: 5/13/2009



\*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9116


Target Location: UR2, Right Side

Test Date: 5/13/2009

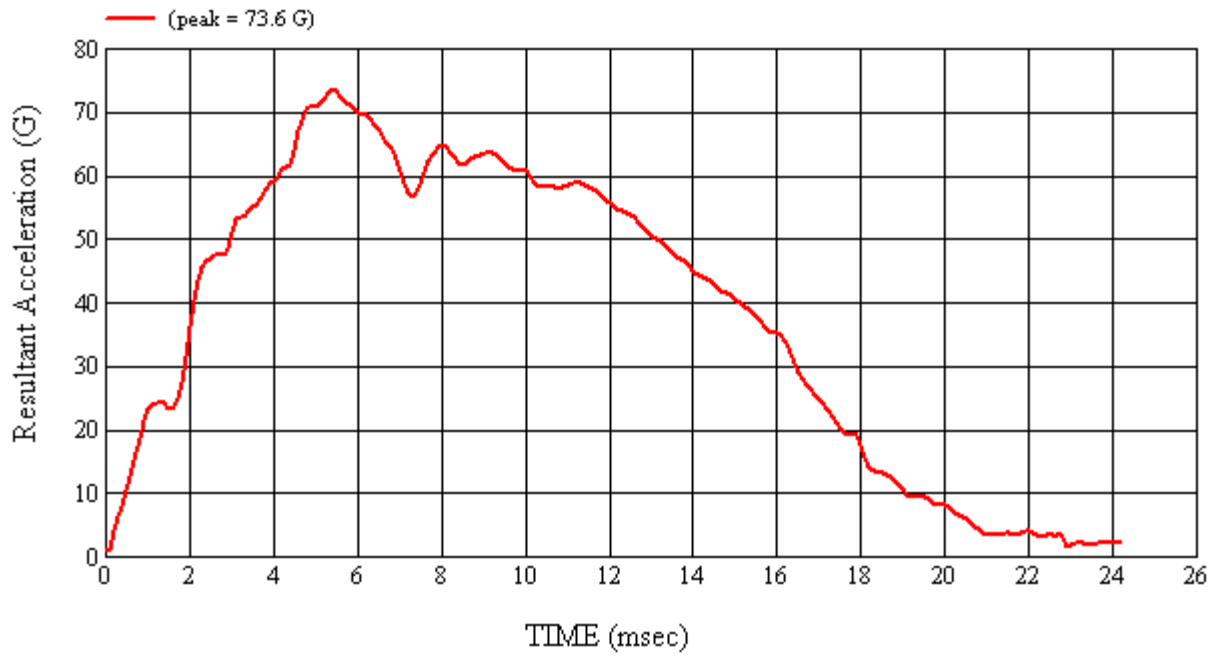
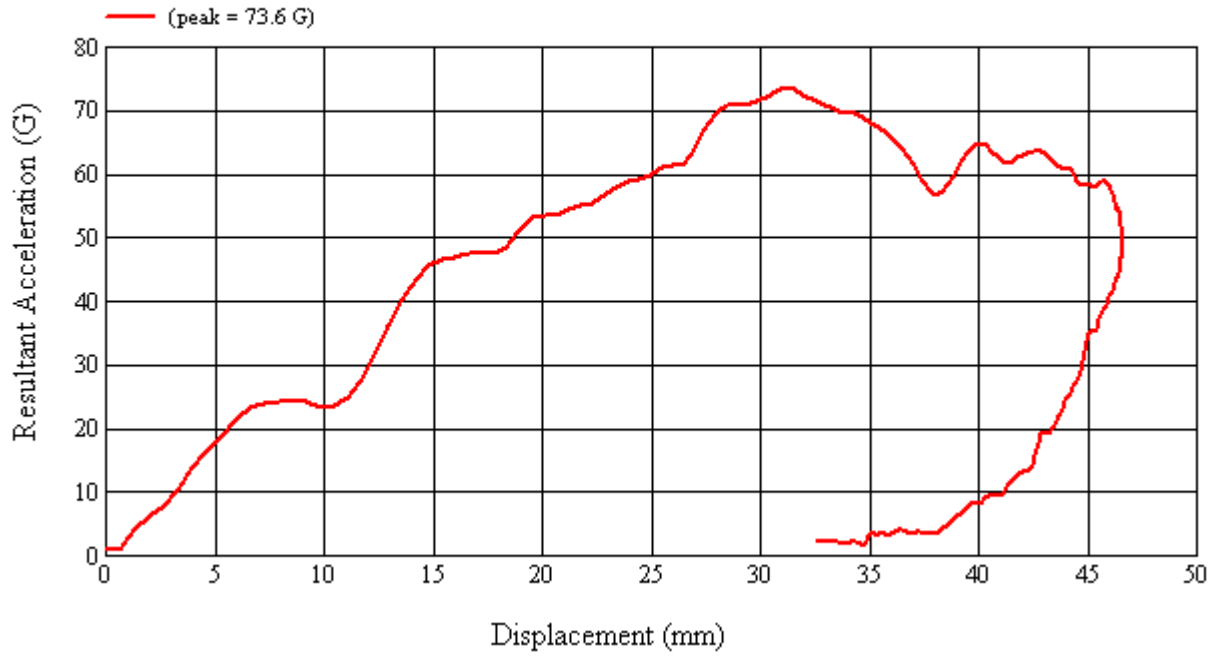


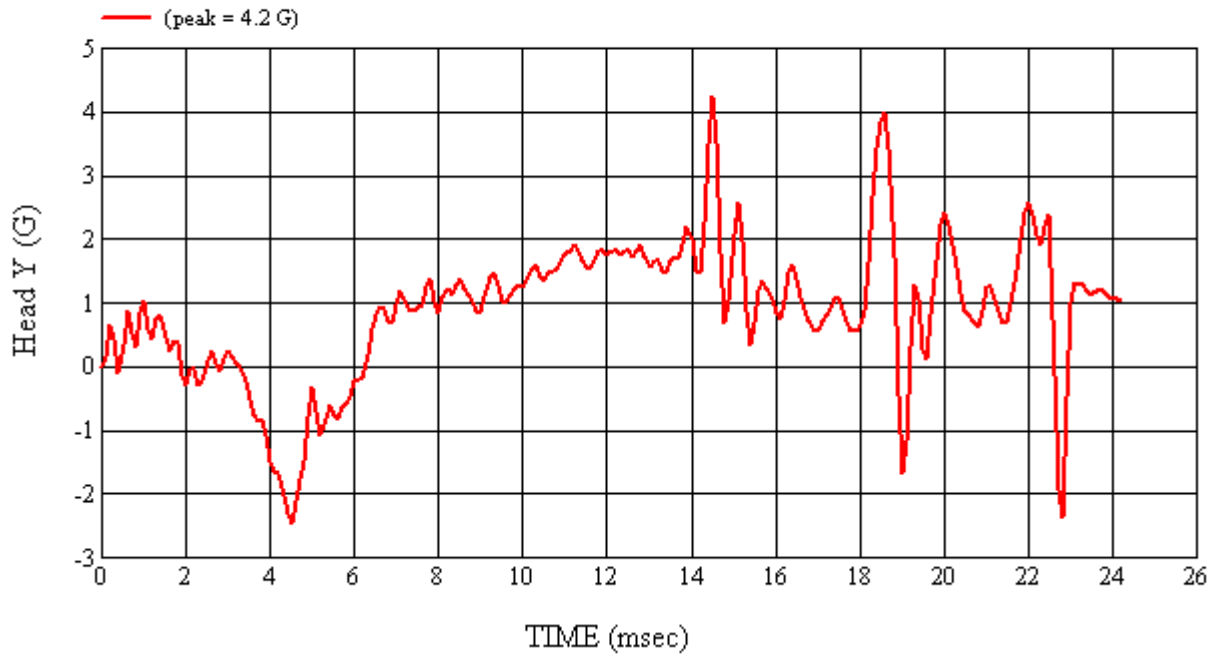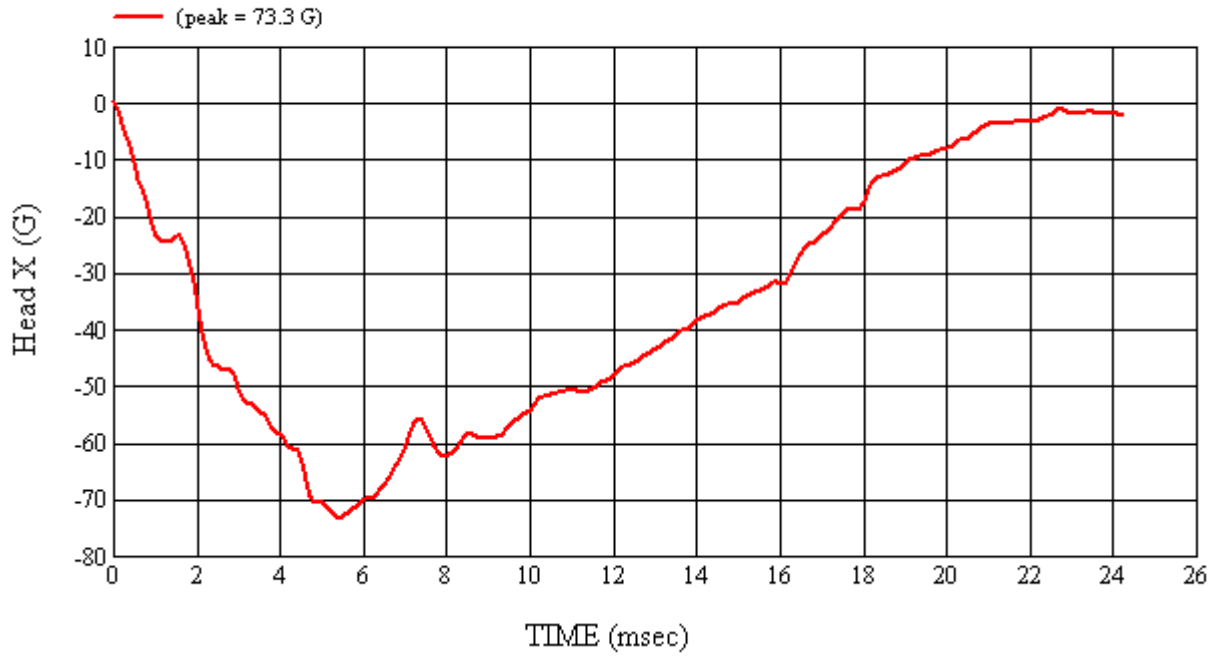


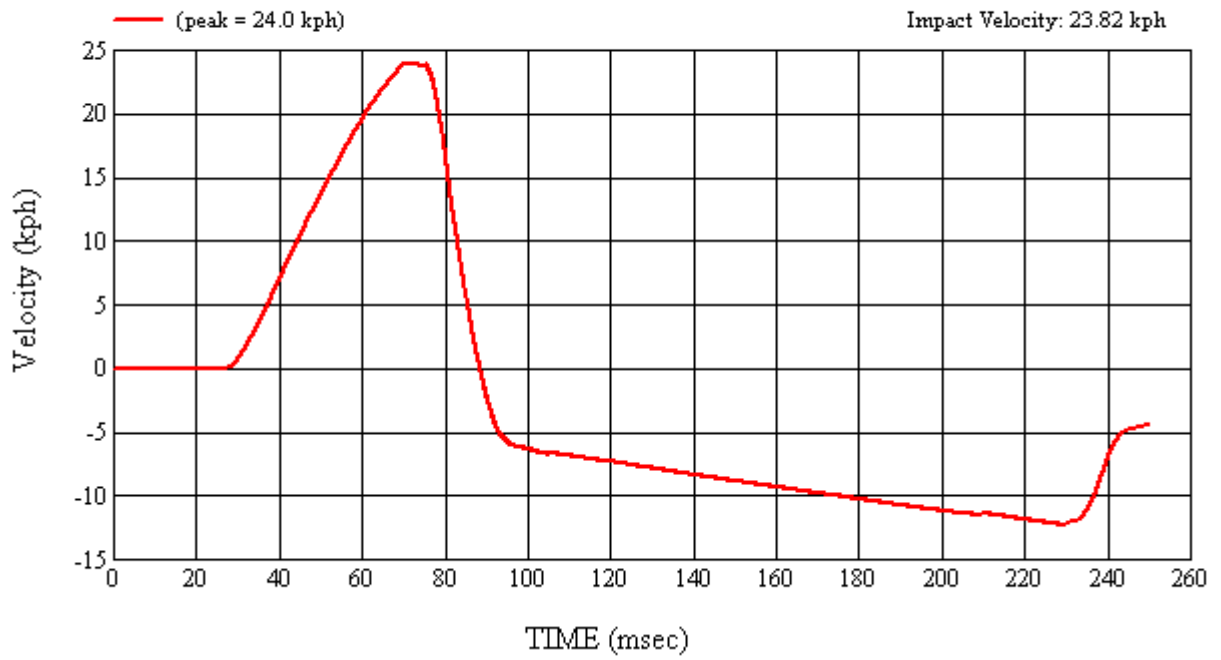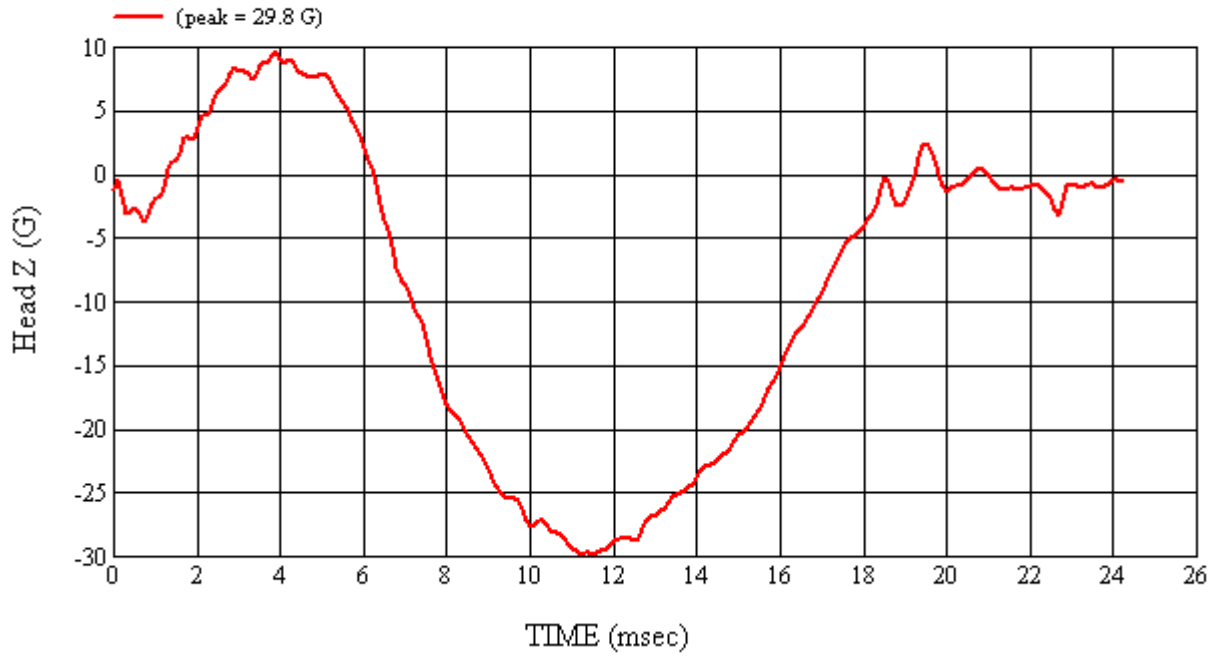

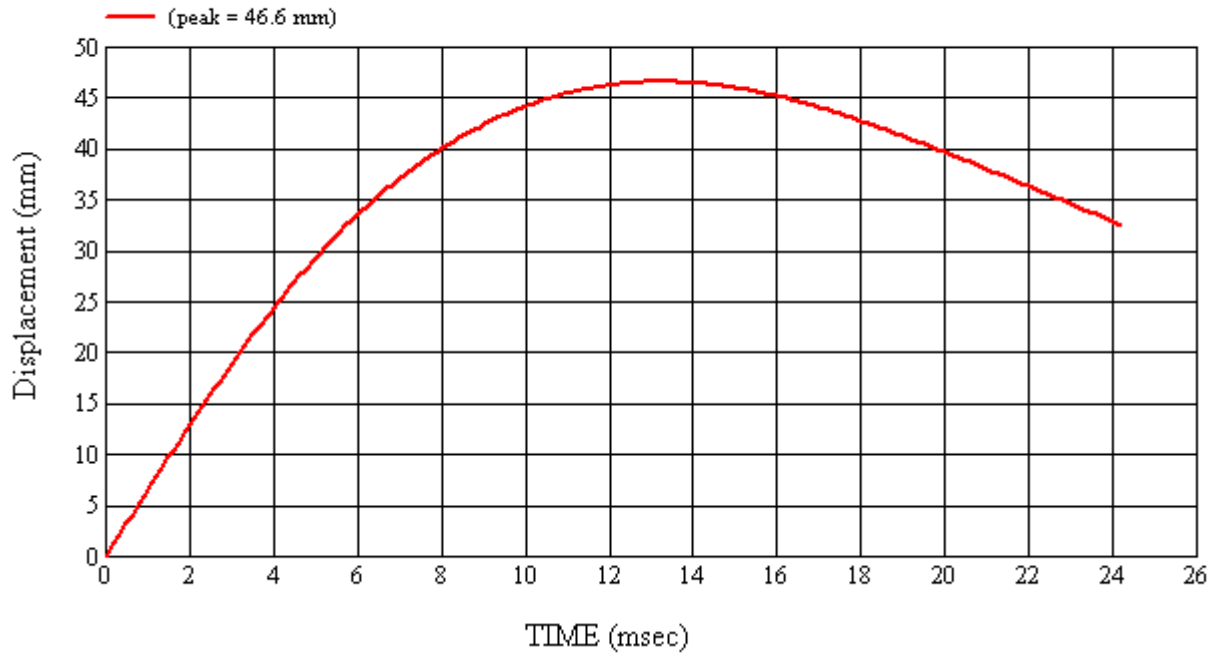



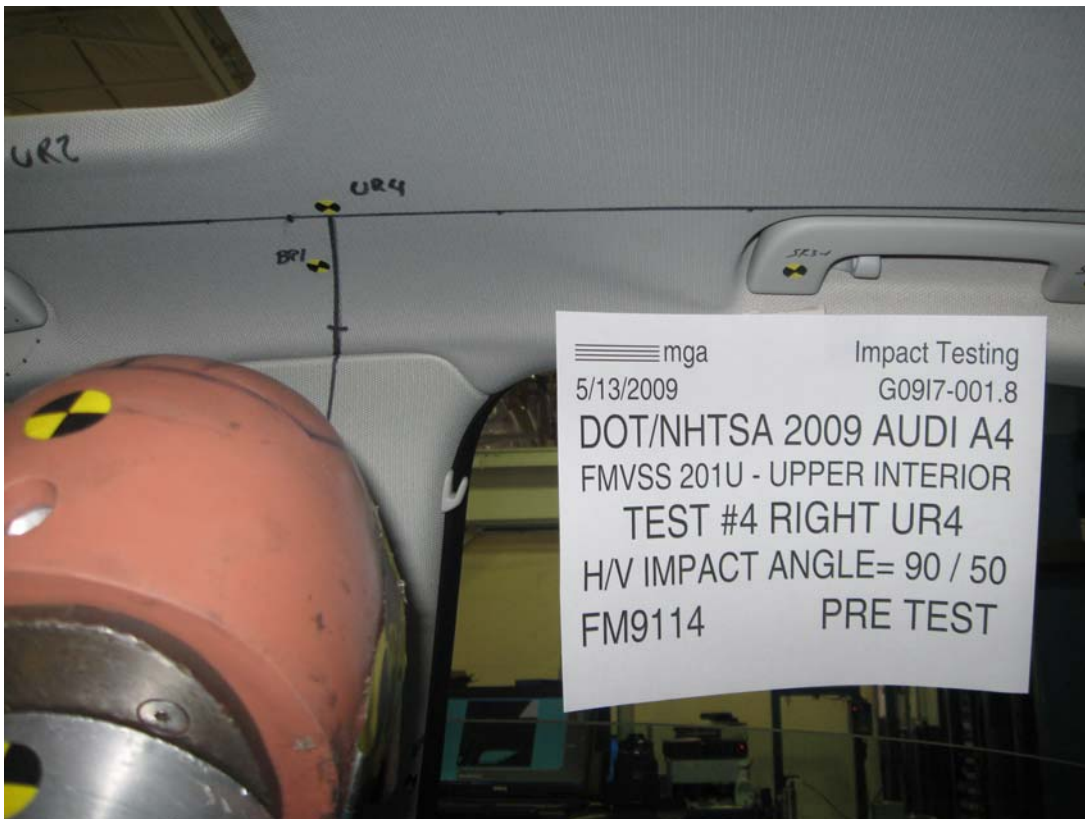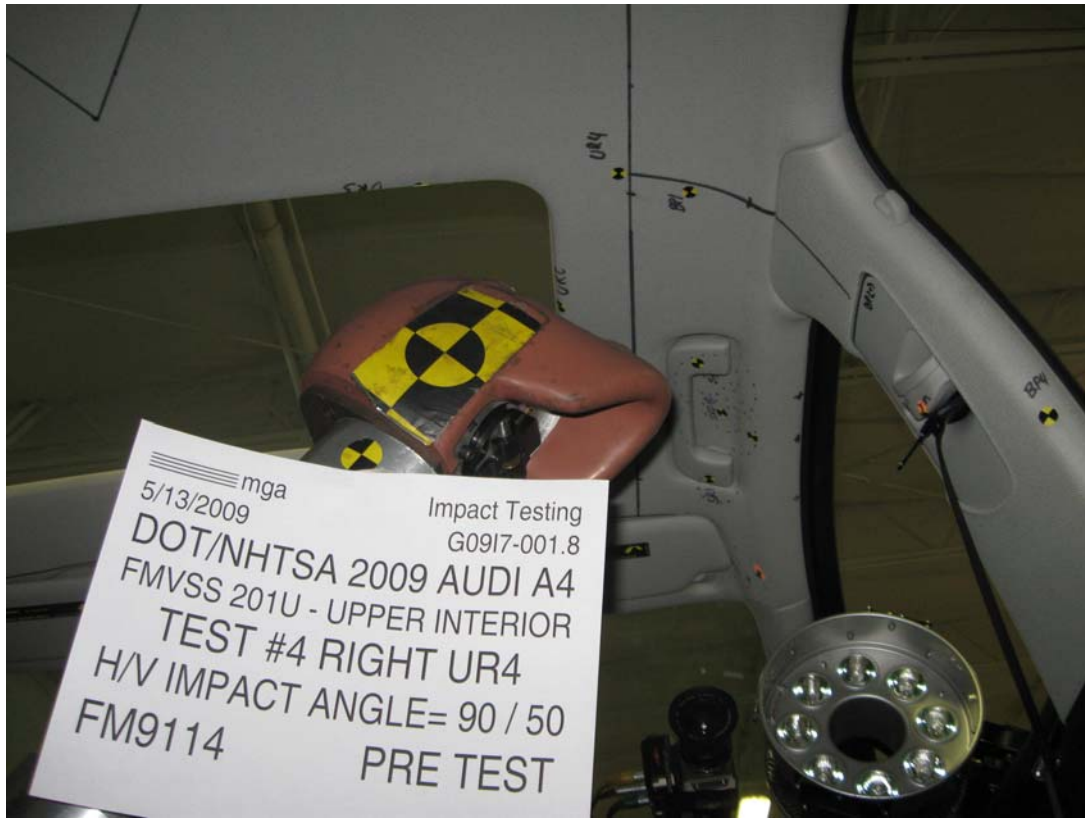

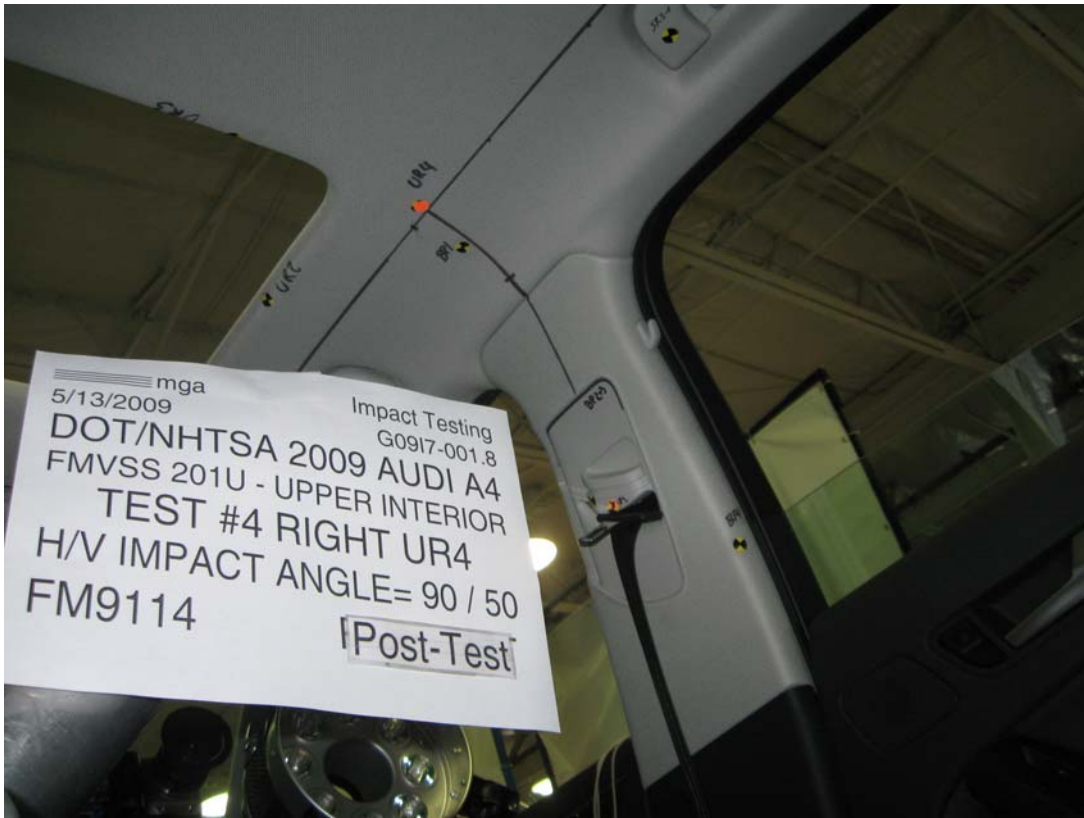



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#4

Target (Vehicle Side): UR4Right

Temperature:21.1C

MGA Test Reference No.:FM9114

Humidity:42.1%

Approach Horizontal Angles:90°

Time of Test:1:41:36 PM

Approach Vertical Angles:50°

FMH Serial No:[035]

Additional Description:Location: at B-Pillar

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
582	551	11.4	24.0	26	1 Left

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	J35919	-95.6	1.06	1.06
Y	6	J22664	94.3	0.85	0.85
Z	7	J35924	92.8	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/13/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9114


Target Location: UR4, Right Side

Test Date: 5/13/2009

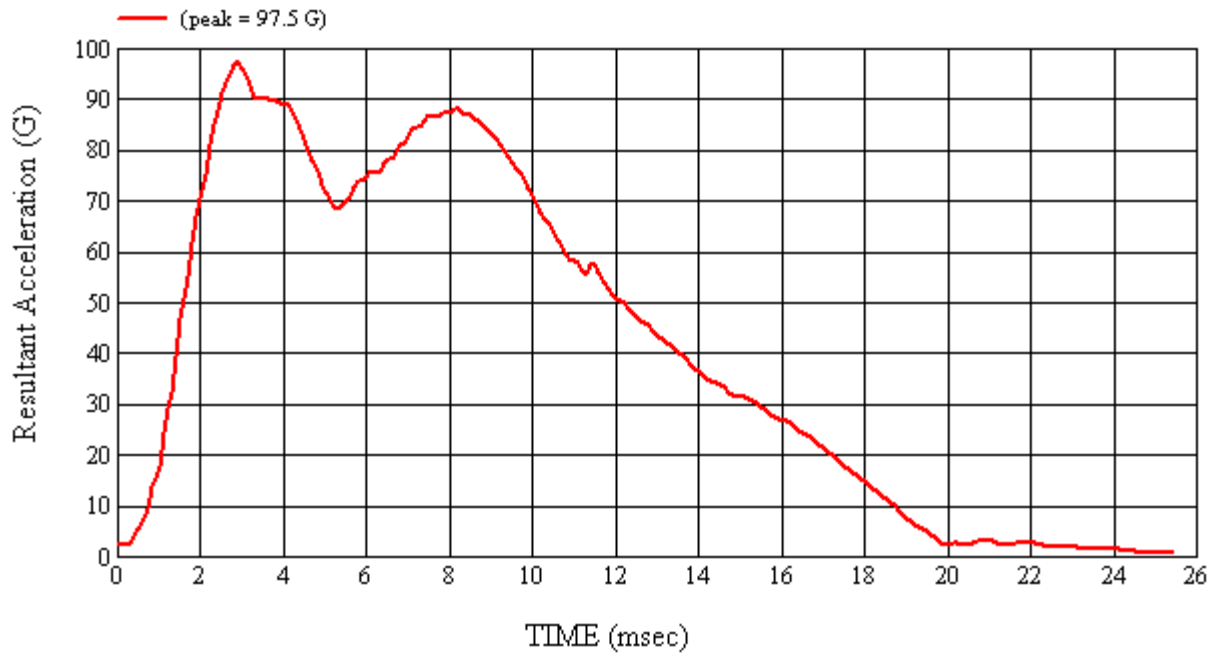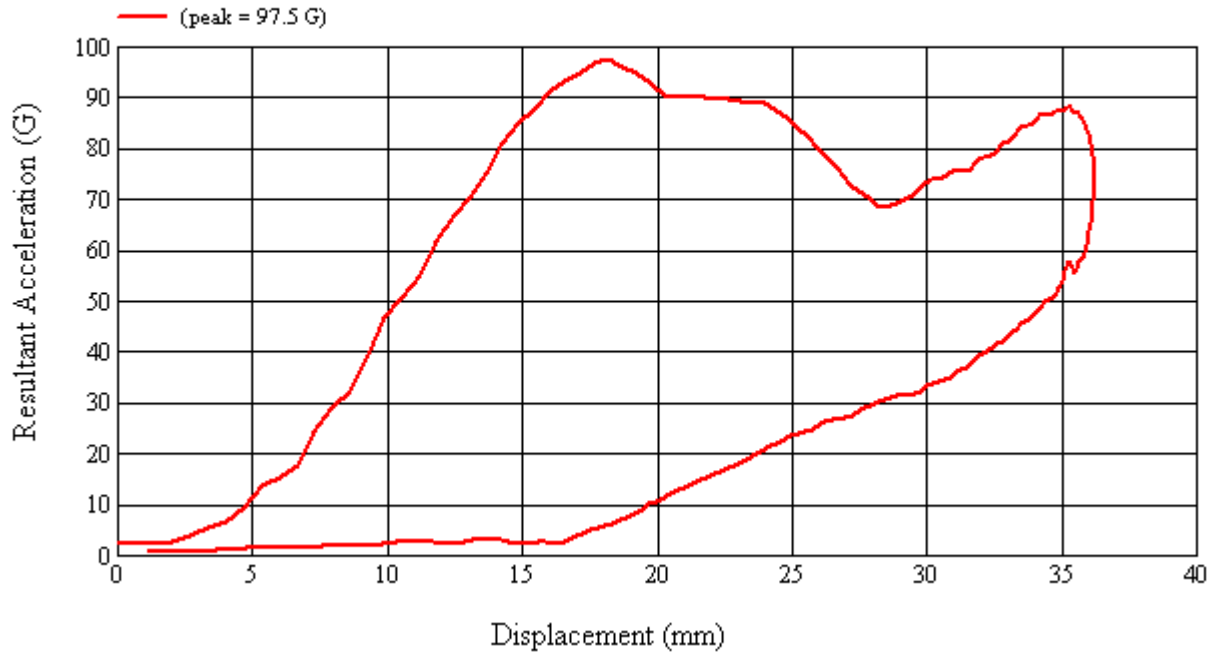

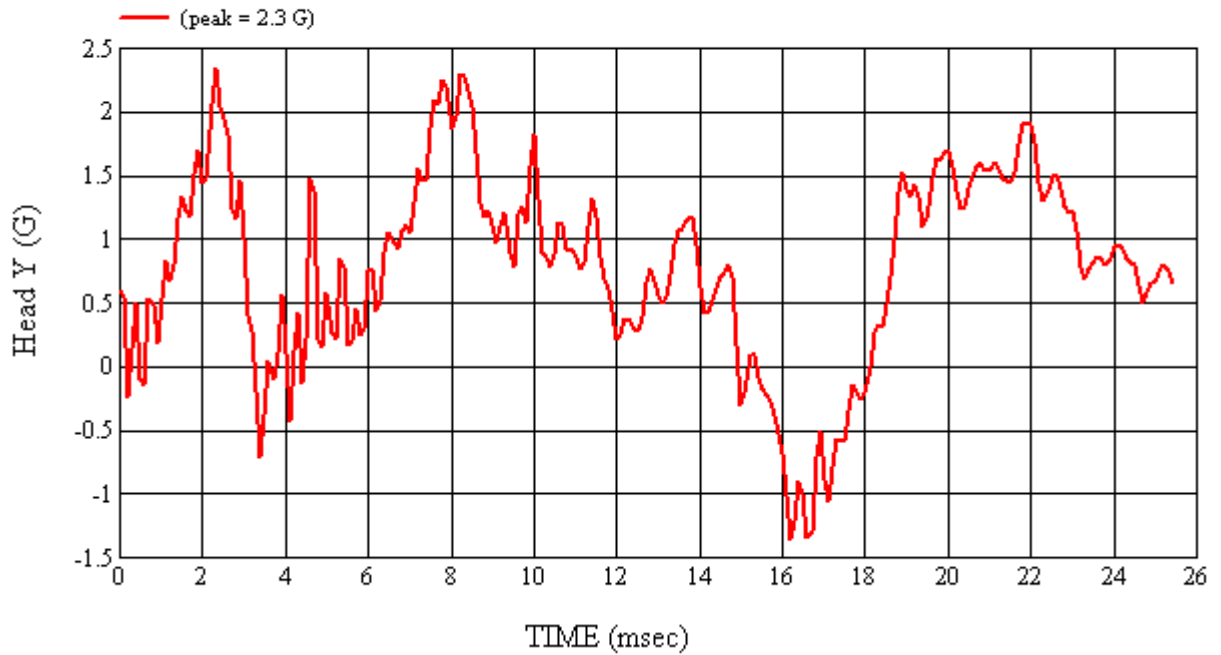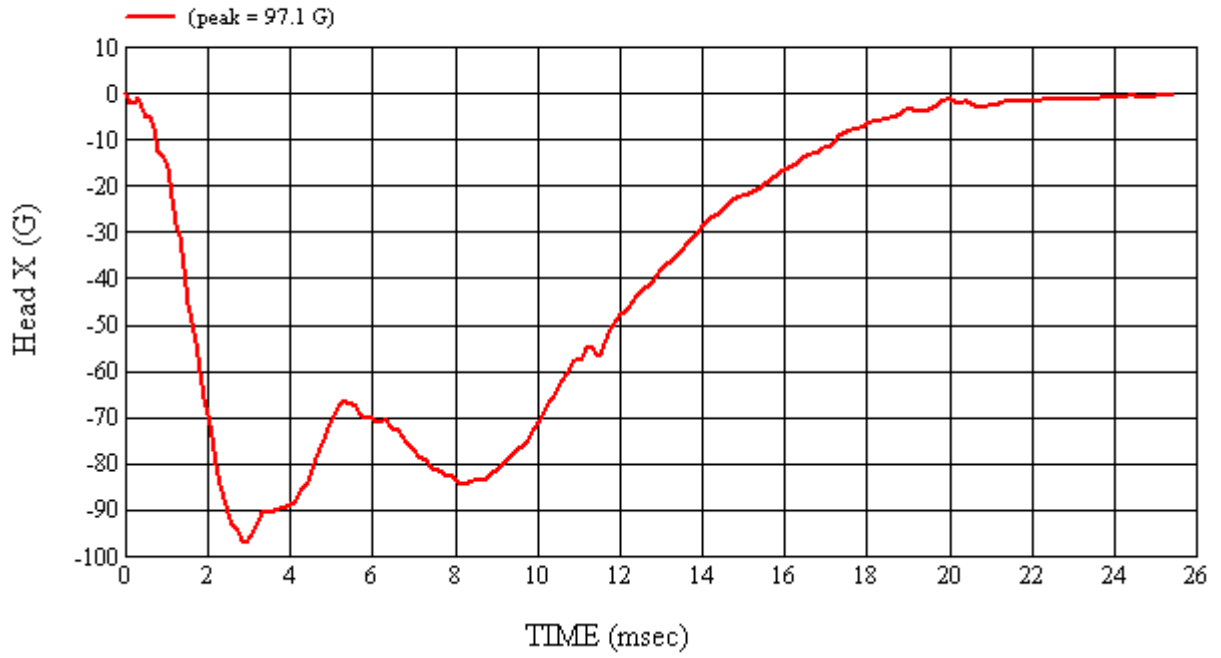


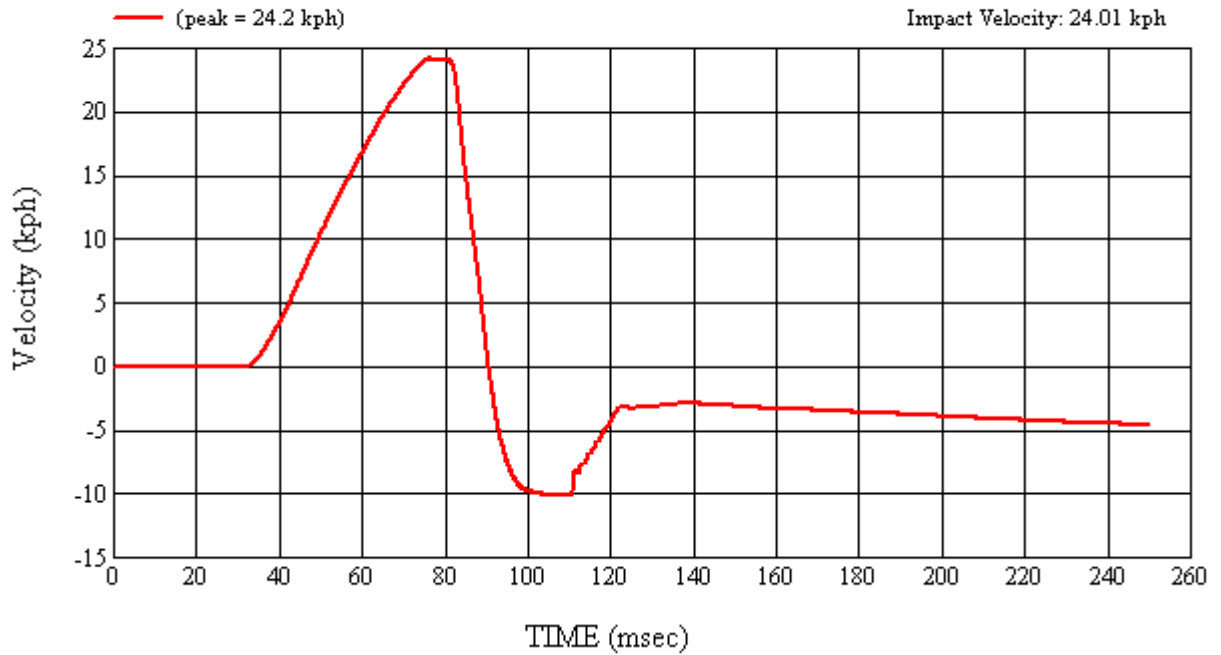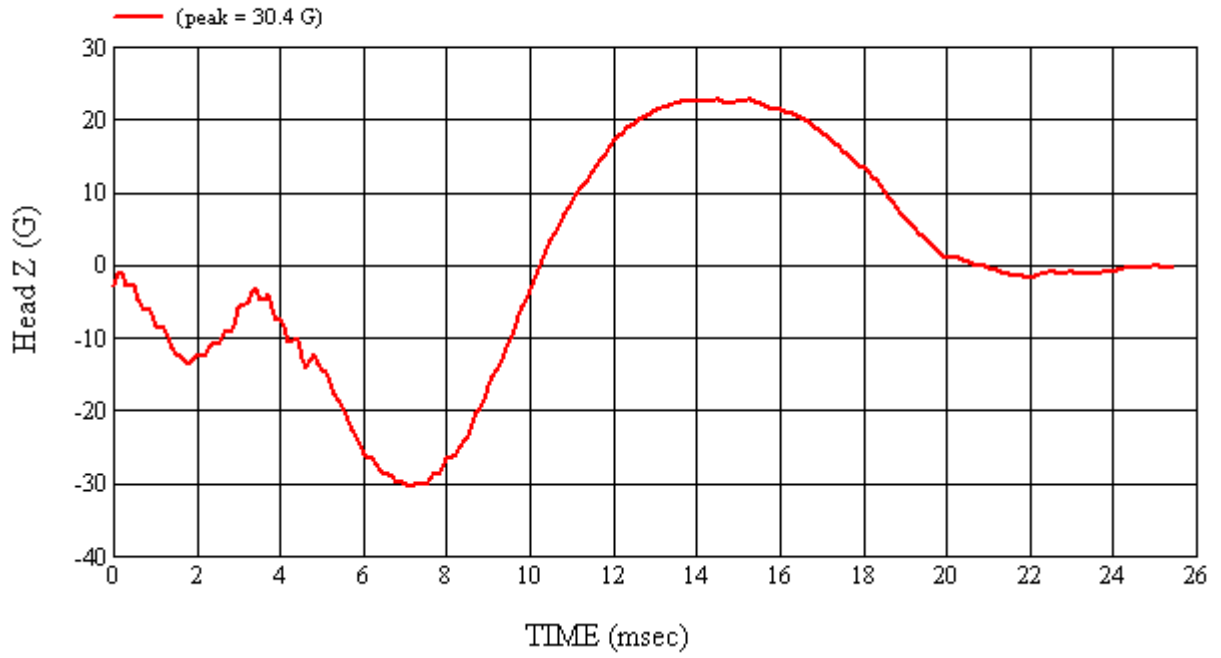

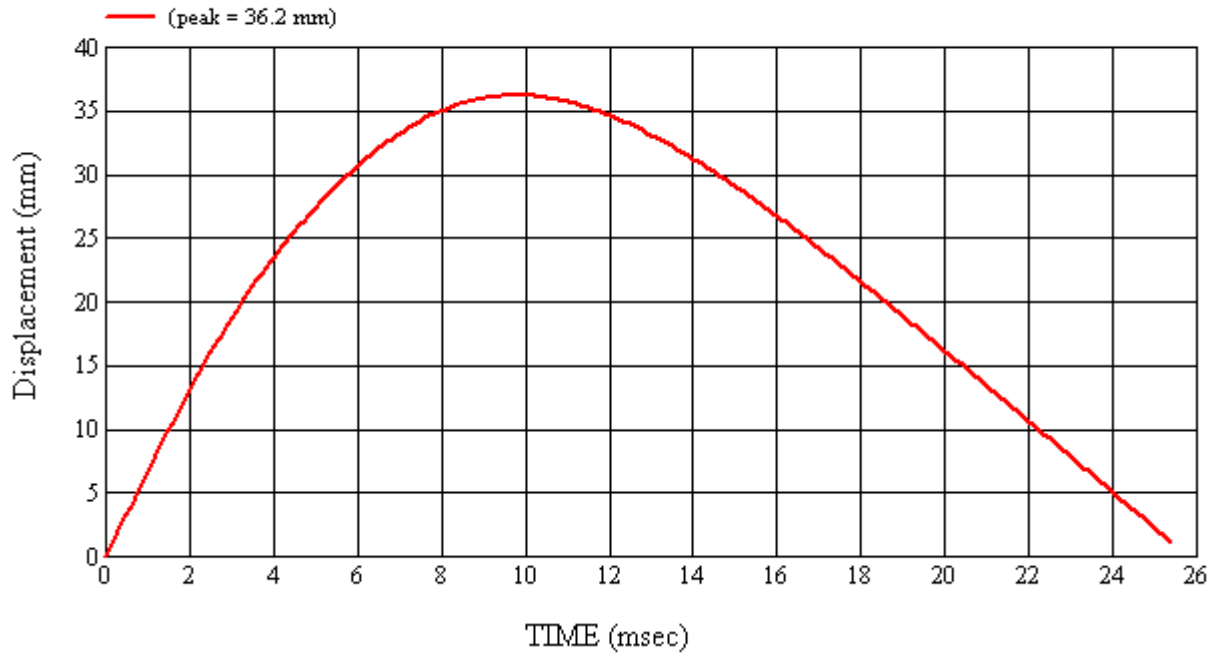





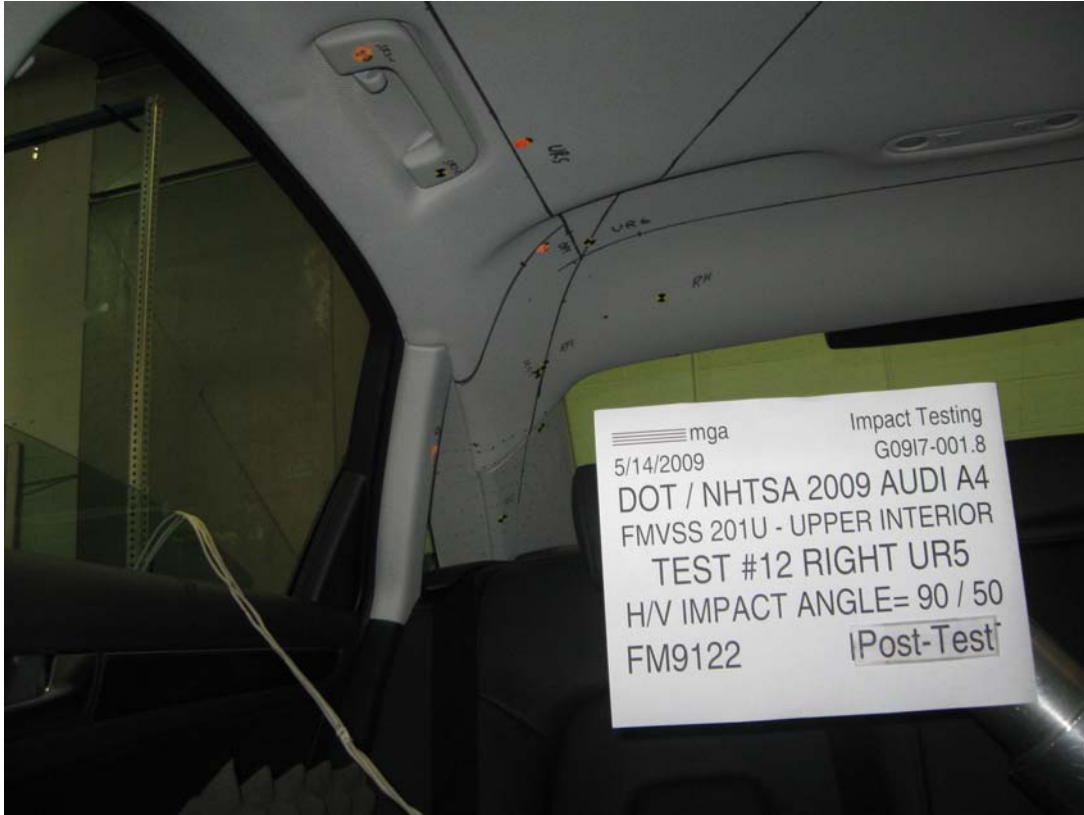



**SUMMARY OF FMVSS 201U TEST**

JOB/NHTSA NO: G09I7-001.8      VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Audi A4

**GENERAL TEST PARAMETERS:**

Test Number:#12

Target (Vehicle Side): UR5Right

Temperature:20.9C

MGA Test Reference No.:FM9122

Humidity:46.9%

Approach Horizontal Angles:90°

Time of Test:2:41:17 PM

Approach Vertical Angles:50°

FMH Serial No:[037]

Additional Description:Location: above SR3-2

**TEST RESULTS:**



HIC(d)	HIC	$\Delta t$ (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
553	512	11.1	24.0	32	2 Right

**INSTRUMENTATION INFORMATION:** (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	$\Delta V$ Pre-Test	$\Delta V$ Post-Test
X	5	AHTB2	-115.9	1.06	1.06
Y	6	J14103	93.7	0.85	0.85
Z	7	J35800	97.1	0.94	0.94

**REMARKS** (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By\*:  Date: 5/14/2009  
 \*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9122


Target Location: UR5, Right Side

Test Date: 5/14/2009

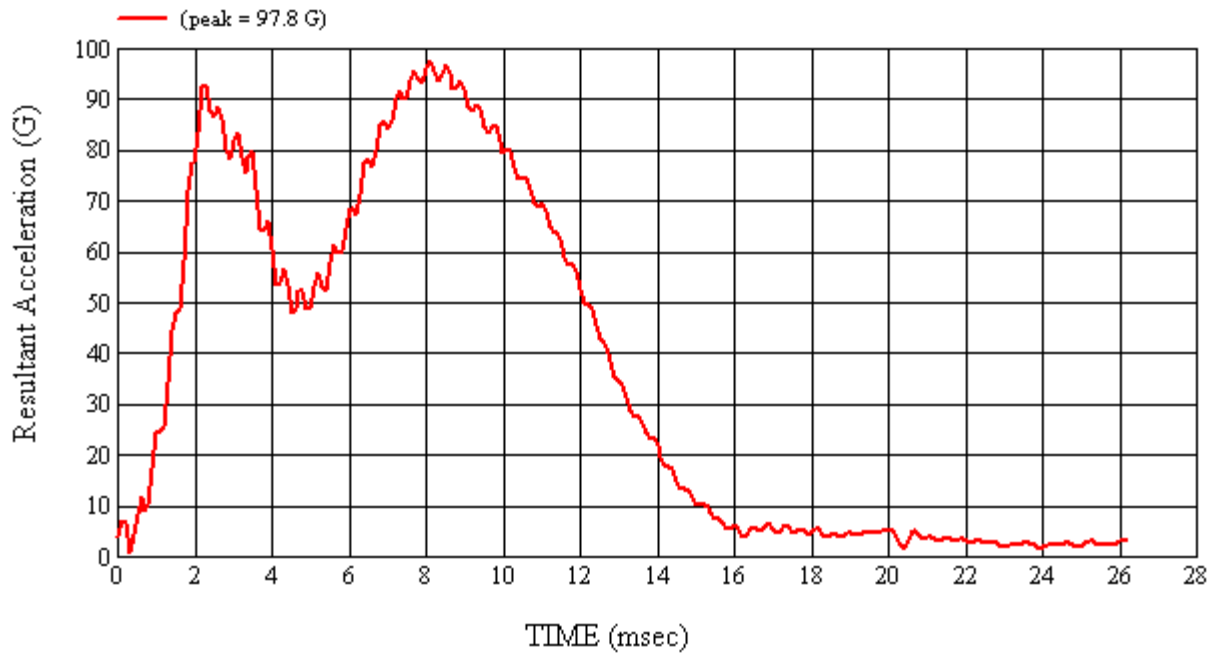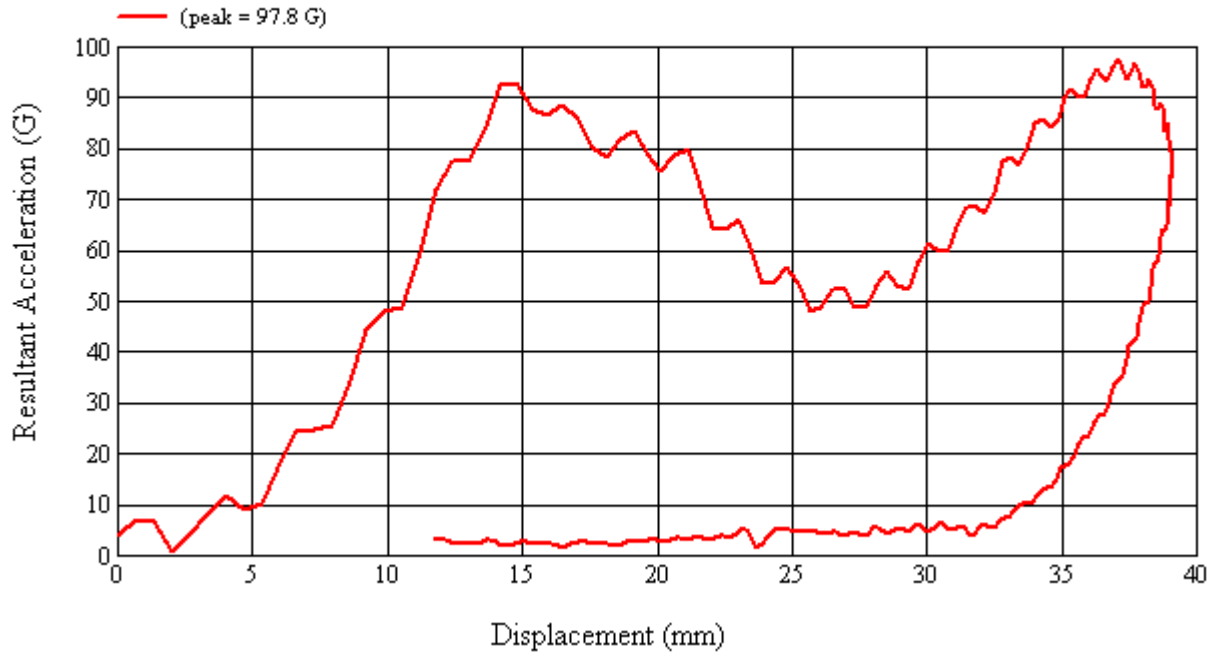

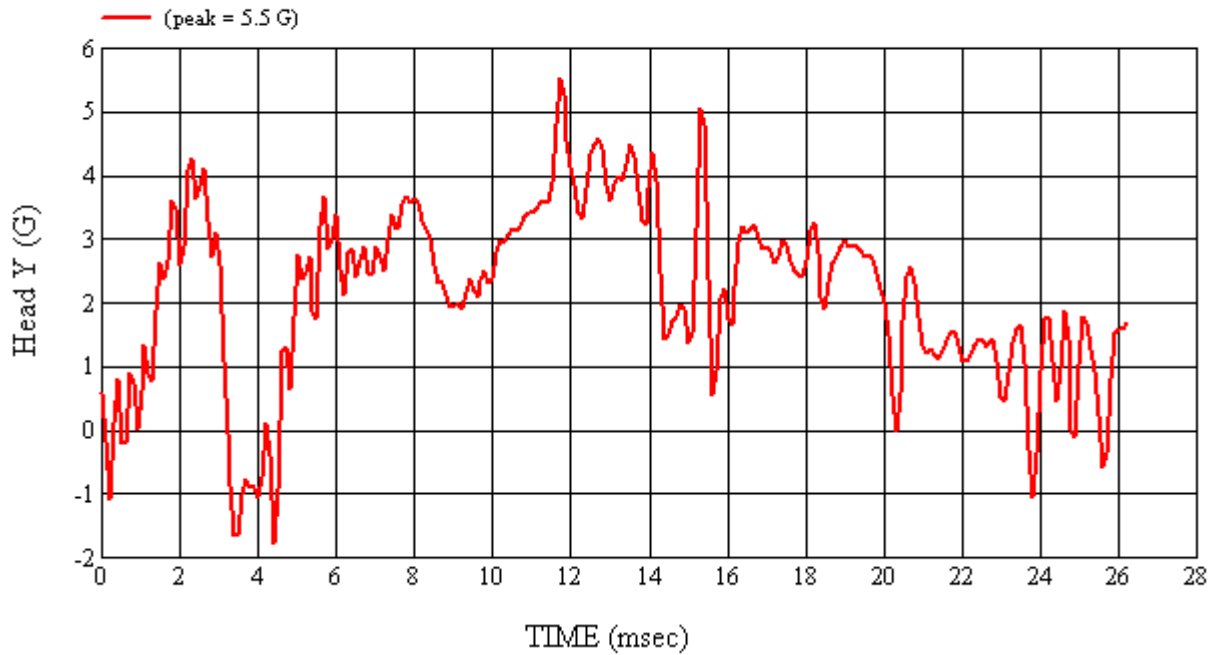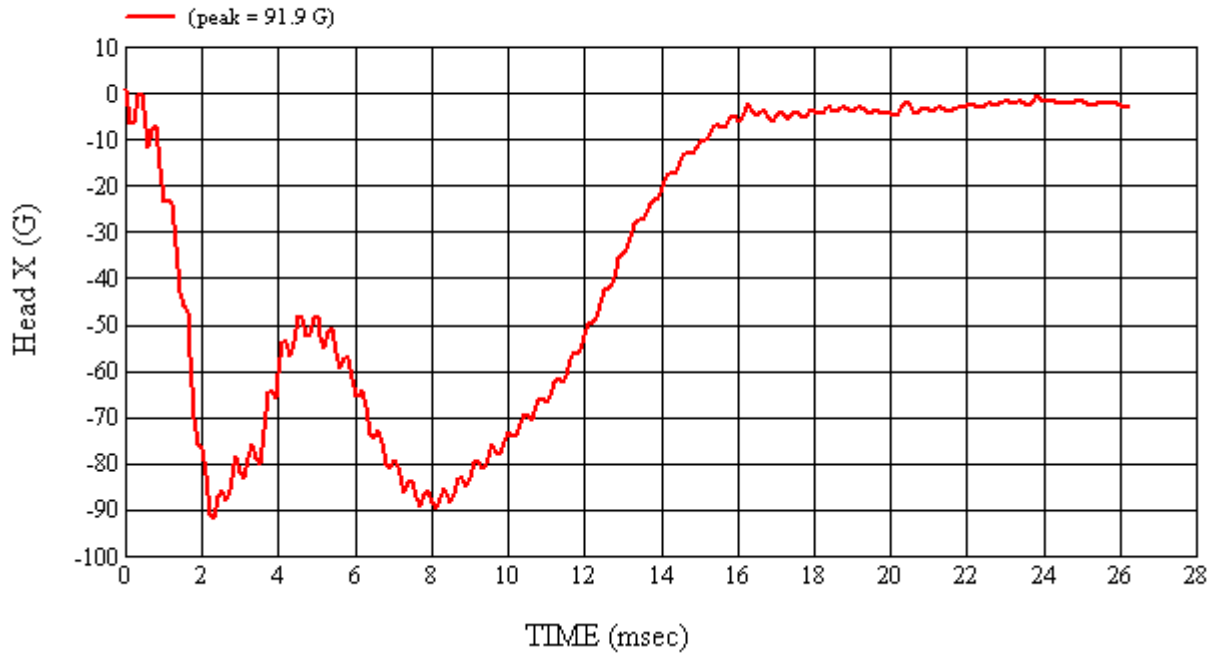

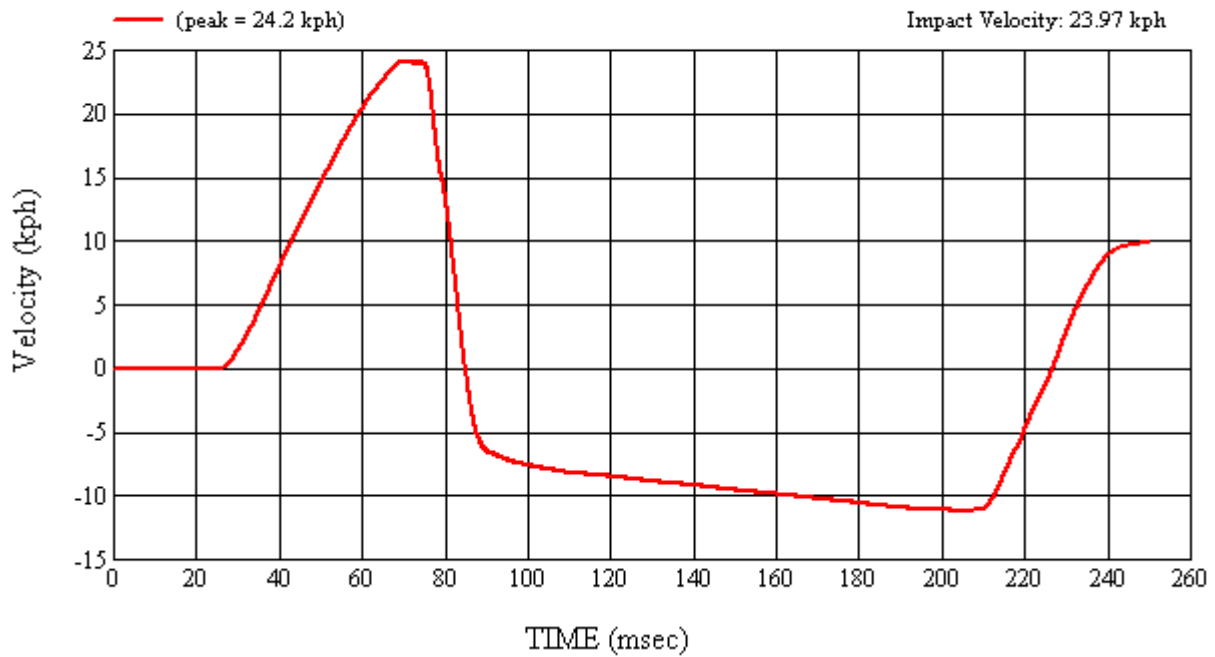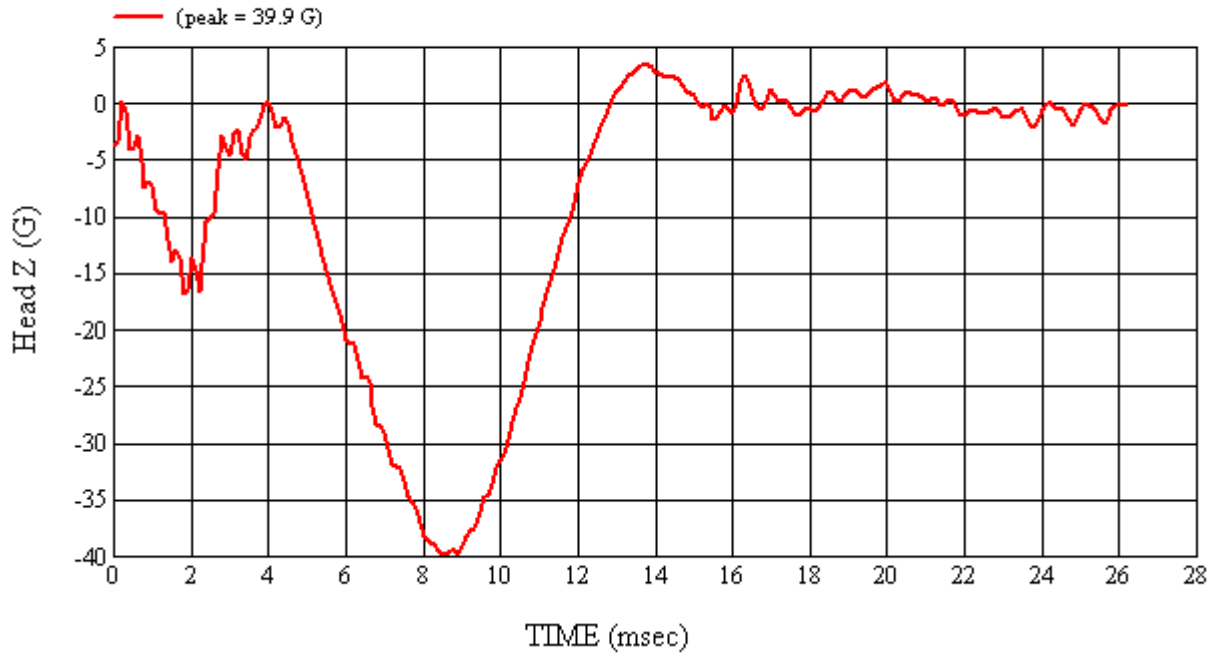

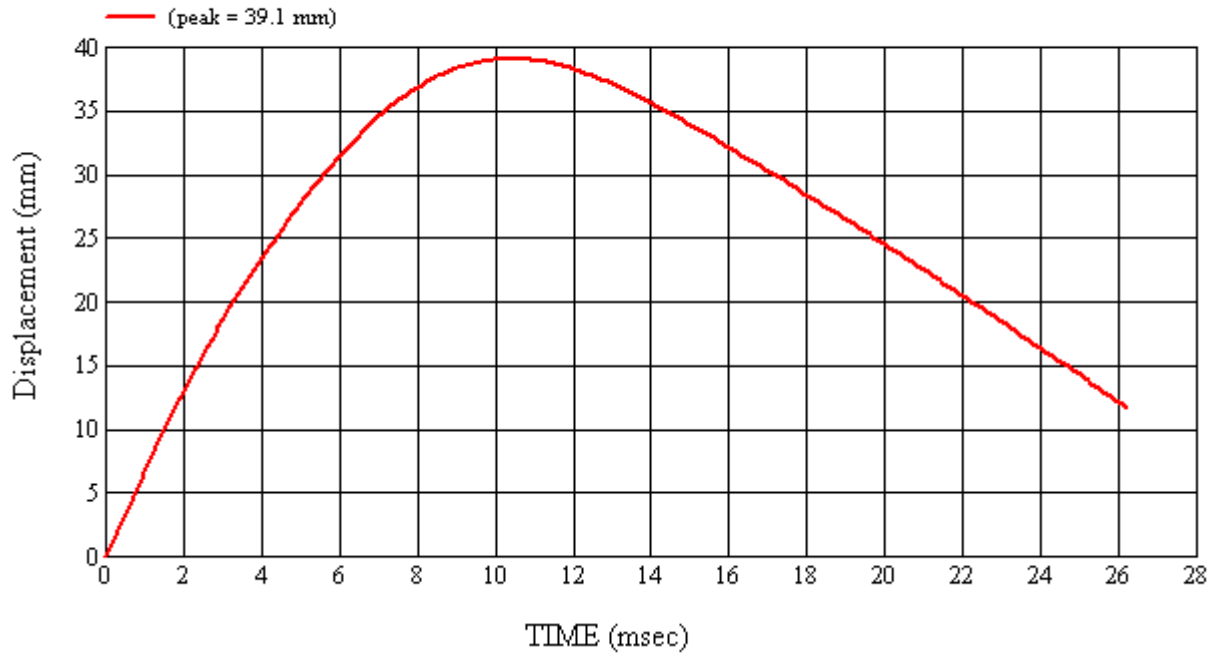



#### 4.0 TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

The following section lists the test equipment for the compliance test series. Items marked with an asterisk are calibrated by an external lab. An additional summary table is given for the pre and post-test calibration data for the Free Motion Headforms. The temperature trace to confirm testing was conducted between 66°F and 78°F (19°C – 26°C) is included in Appendix A. Calibration certificates can be found in Appendix B.

**TABLE 4-1 LIST OF ITEMS USED**

ITEM	MANUFACTURER NAME	MODEL #	FUNCTION OF ITEM	ACCURACY	CAL. INTERNAL
Head Drop Tower (includes test frame and DAS)	MGA Research Corp.	MGA-100-DC	FMH Calibration	N/A	N/A
Accelerometers	Endevco	7264-2000	Acceleration Data	±0.5%	6 months
*Digital Inclinometer	Mitutoyo	PRO 360 (MGA00730)	Set Angle of FMH/Targeting	0.1°	Annual
FMVSS 201U Test Frame (includes the propulsion control system, actuator, test frame, and DAS)	MGA Research Corp.	MGA-100-FMH	Test System	N/A	N/A
Free Motion Headforms	UTAMA UTAMA UTAMA	035 037 038	Test Device	N/A	Pre and Post-Test Series
High Speed Video	Vision Research	Miro	Record Event	N/A	N/A
*FARO™	Faro Technologies	S08059801273	Targeting	0.1 mm	Annual
Measuring Devices: - Tape Measure - Plumb Bobs - Digital Protractor	Stanley N/A Mitutoyo	TPM906 -- MGA00730	Measurement Targeting FMH setup Horizontal Measurement	1 mm N/A 0.5°	Annual
*Temperature Recorder	Dickson	MGA00152	Record Temperature and Humidity	± 1°C ± 1% RH	Annual
* Scale	Detecto	MGA00081	Weigh FMH Head	± 0.01 lb	Annual
*Vehicle Scale	Sterling Scale Co.	26032389	Weighing Vehicle	± .5 kg	Annual

Each headform was calibrated by an engineer after the headform had soaked in an environment of 66°F to 78°F (19°C to 26°C) for a period of at least four hours.

Each headform was found to comply with the performance criteria under Part 572L for pre and post-test calibrations. That is, the peak resultant acceleration was between 225 and 275 G's, the peak lateral acceleration was less than 15 G's, the headform weighed between 9.9 and 10.1 lbs., the pulse was determined to be unimodal, and there was no major damage to the headform.

**TABLE 4-2 FMH CALIBRATION SUMMARY**

FMH Serial #		Headform Calibration Date	Weight (lbs)	Temp (°C)	% Humidity	Peak Resultant Acceleration (G's)	Peak Lateral Acceleration (G's)	Unimodal
Pre	#035	5/12/2009	9.90	20.9	45.8	237.5	2.4	Yes
Post	#35	5/18/2009	9.90	20.9	35.1	238.8	2.9	Yes
Pre	#037	5/12/2009	9.96	20.9	45.8	252.2	4.8	Yes
Post	#037	5/18/2009	9.96	20.9	35.1	252.8	4.4	Yes
Pre	#038	5/12/2009	9.90	20.9	45.8	252.7	8.8	Yes
Post	#038	5/18/2009	9.90	20.9	35.1	254.6	10.4	Yes

**4-1 Pre-Test Calibration**

**HEAD DROP TEST SUMMARY  
 PART 572L**


HEADFORM SERIAL NUMBER: 035		CALIBRATION DATE: 5/12/2009
CALIBRATION TIME: 5:27:05 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	20.9
Relative Humidity	10% to 70%	45.8
Peak Resultant Acceleration	225 G's to 275 G's	237.5
Peak Lateral Acceleration	15 G's Maximum	2.4
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J35919	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J22664	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35924	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/12/2009


APPROVED BY: 

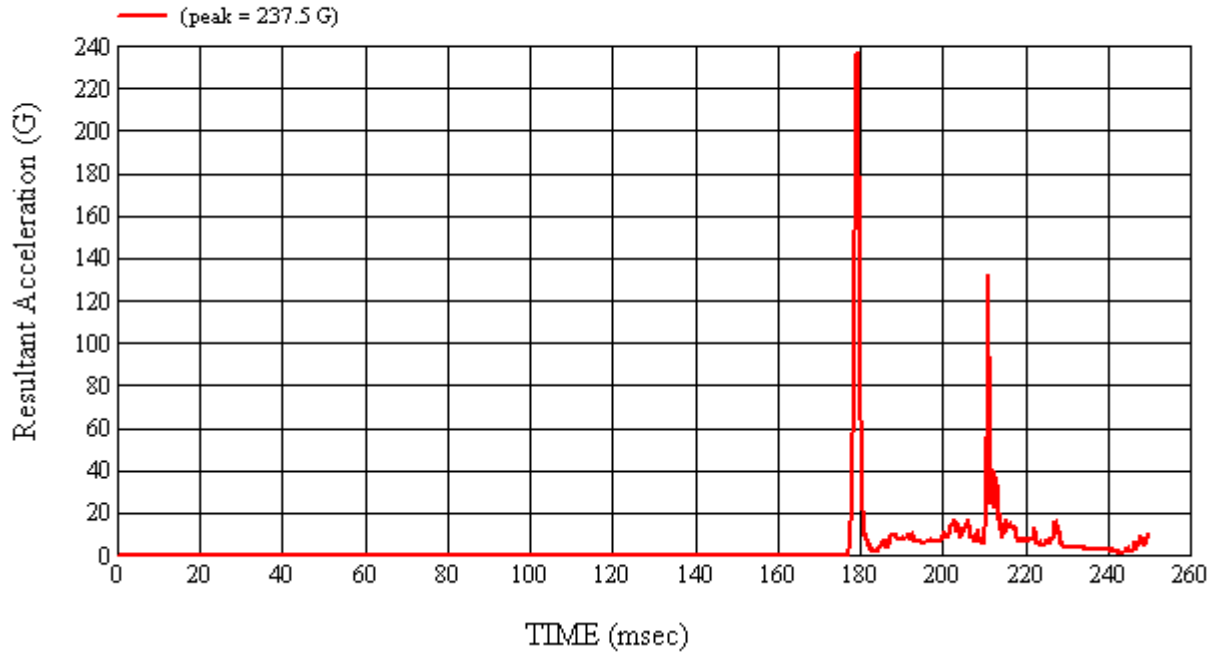


Head 035 (Pre) Calibration #H35013

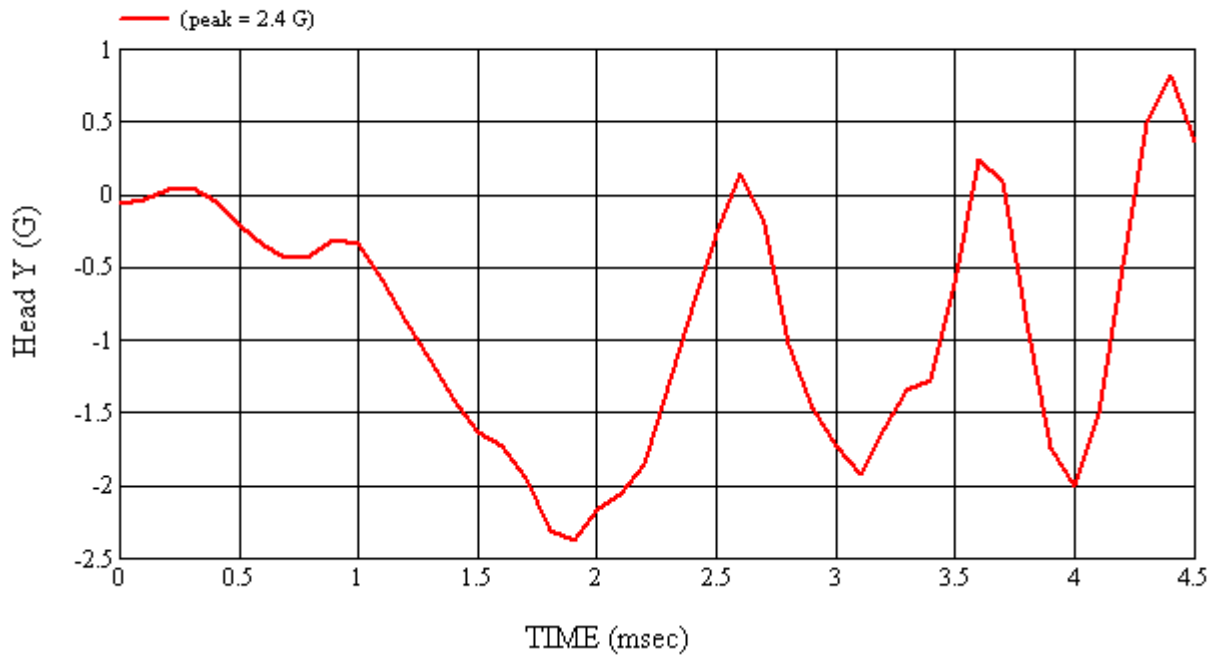

Head 035 (Pre) Calibration #H35013

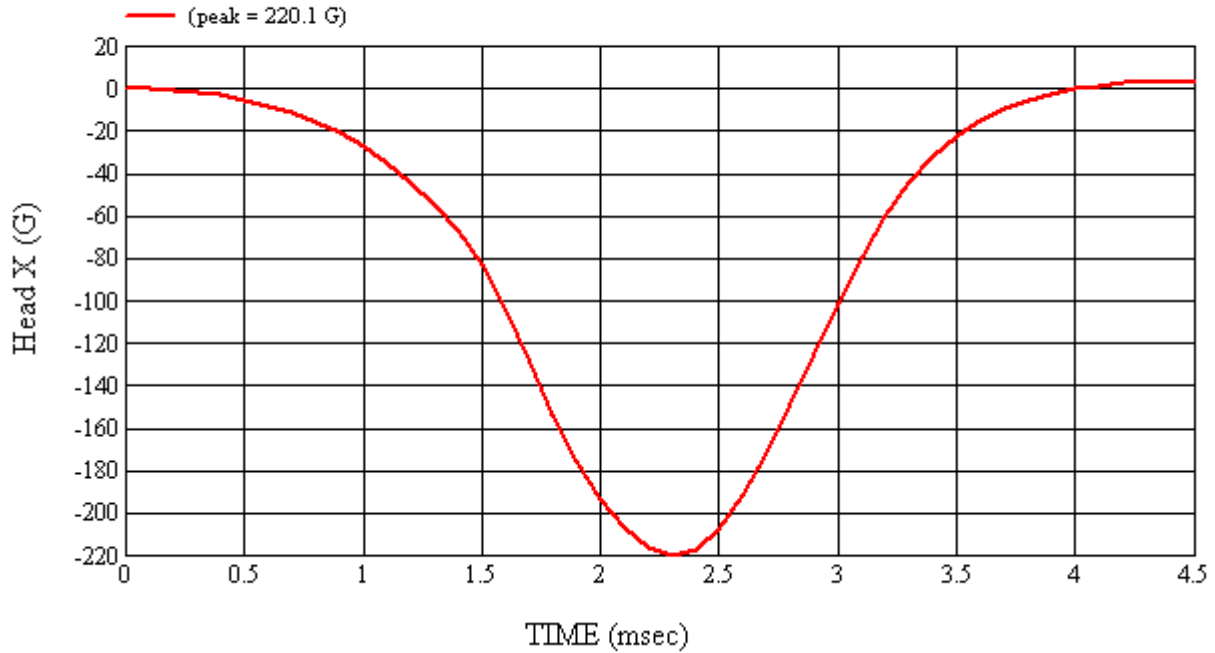

Head 035 (Pre) Calibration #H35013

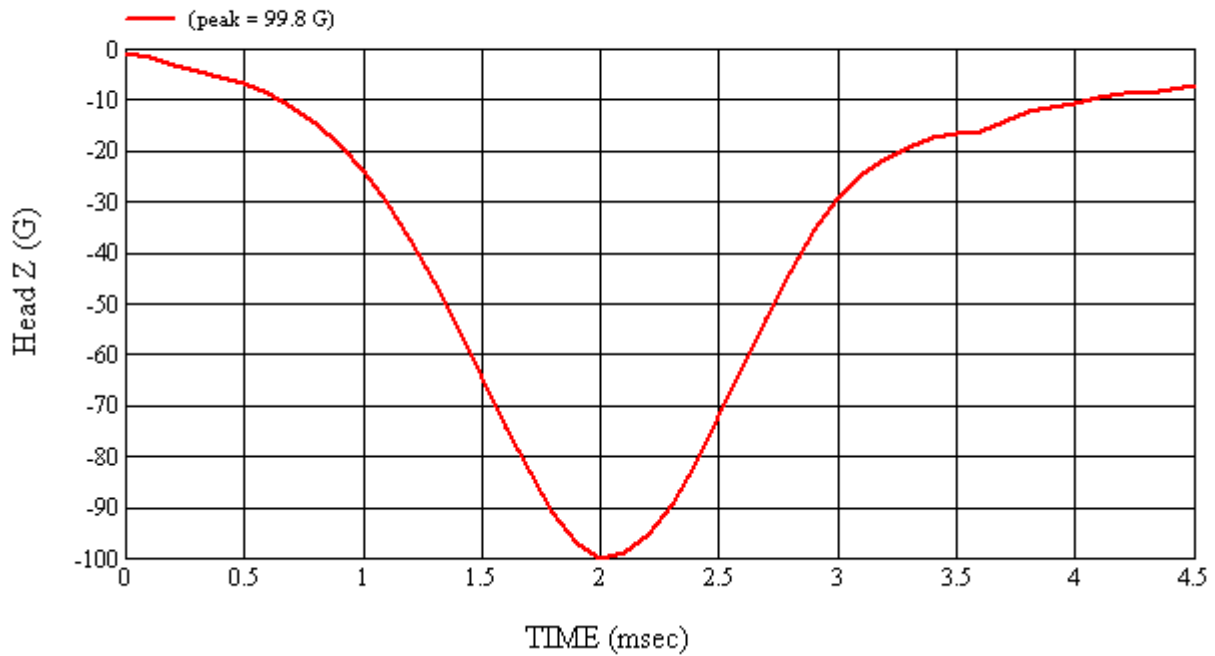

Head 035 (Pre) Calibration #H35013

**4-2 Post-Test Calibration**

**HEAD DROP TEST SUMMARY  
 PART 572L**


HEADFORM SERIAL NUMBER: 35		CALIBRATION DATE: 5/18/2009
CALIBRATION TIME: 2:42:53 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	20.9
Relative Humidity	10% to 70%	35.1
Peak Resultant Acceleration	225 G's to 275 G's	238.8
Peak Lateral Acceleration	15 G's Maximum	2.9
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J35919	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J22664	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35924	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/18/2009


APPROVED BY: 

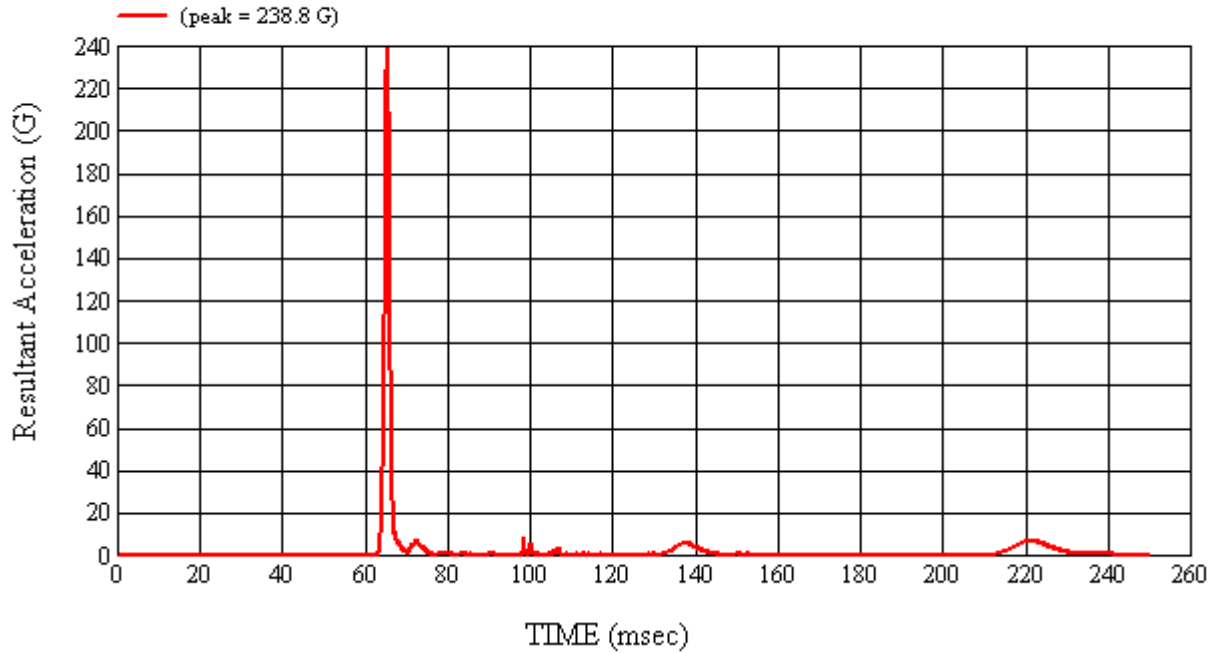


Head 35 (Post) Calibration #H35014

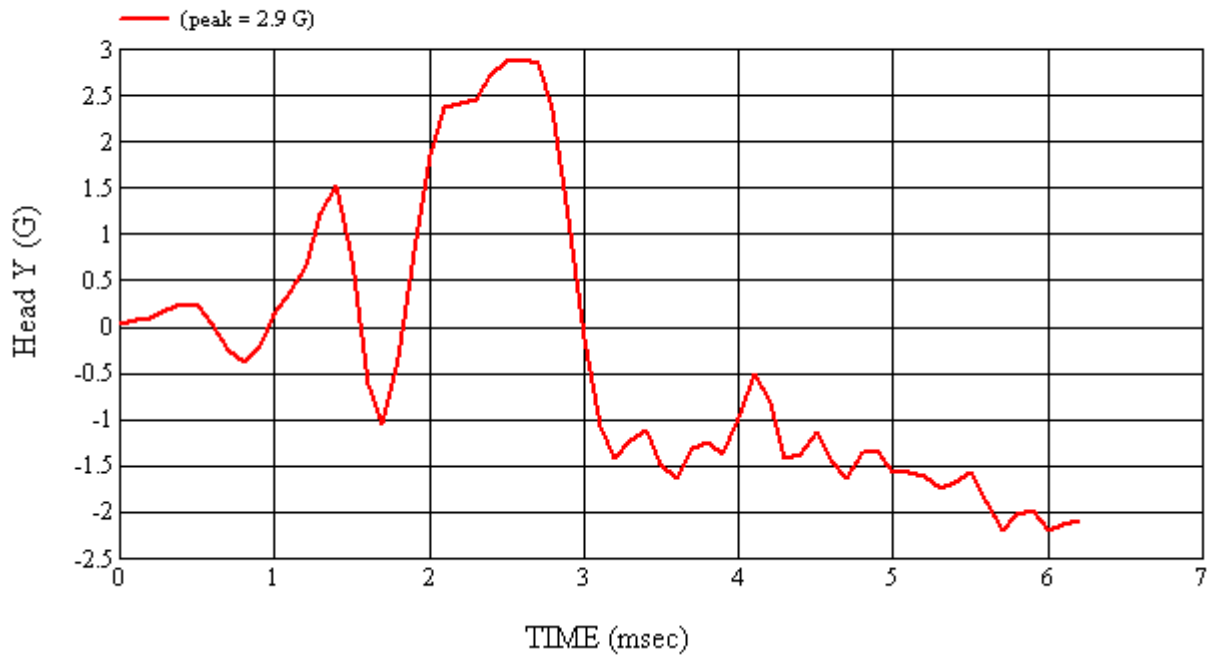

Head 35 (Post) Calibration #H35014

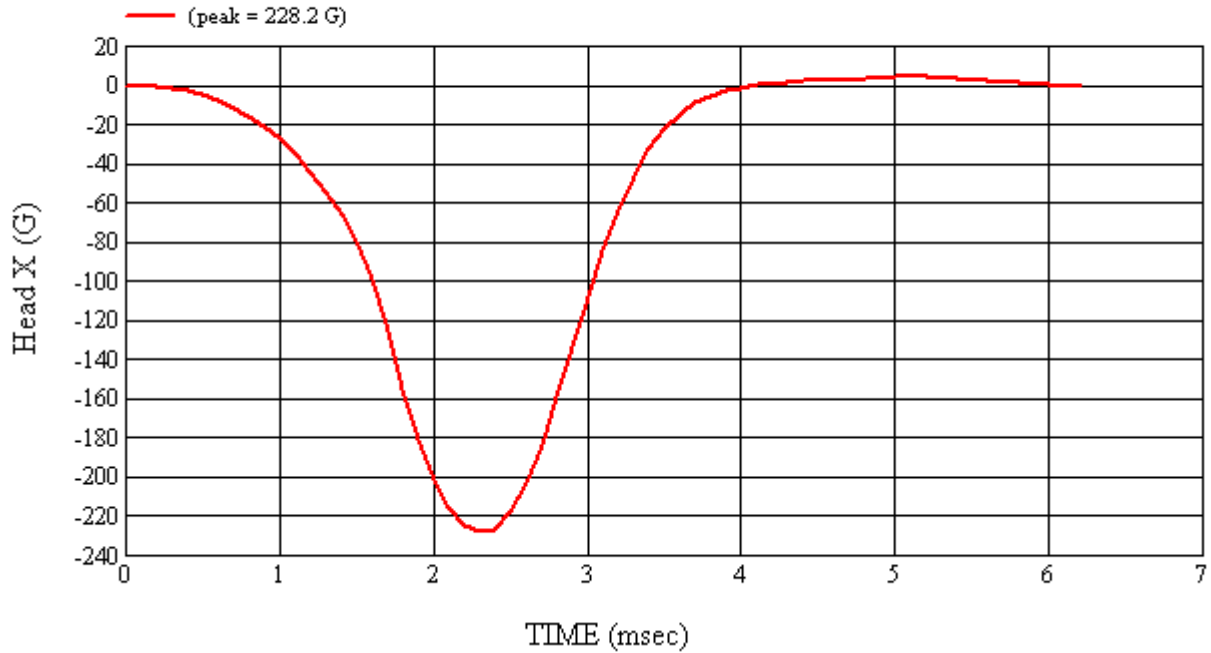

Head 35 (Post) Calibration #H35014

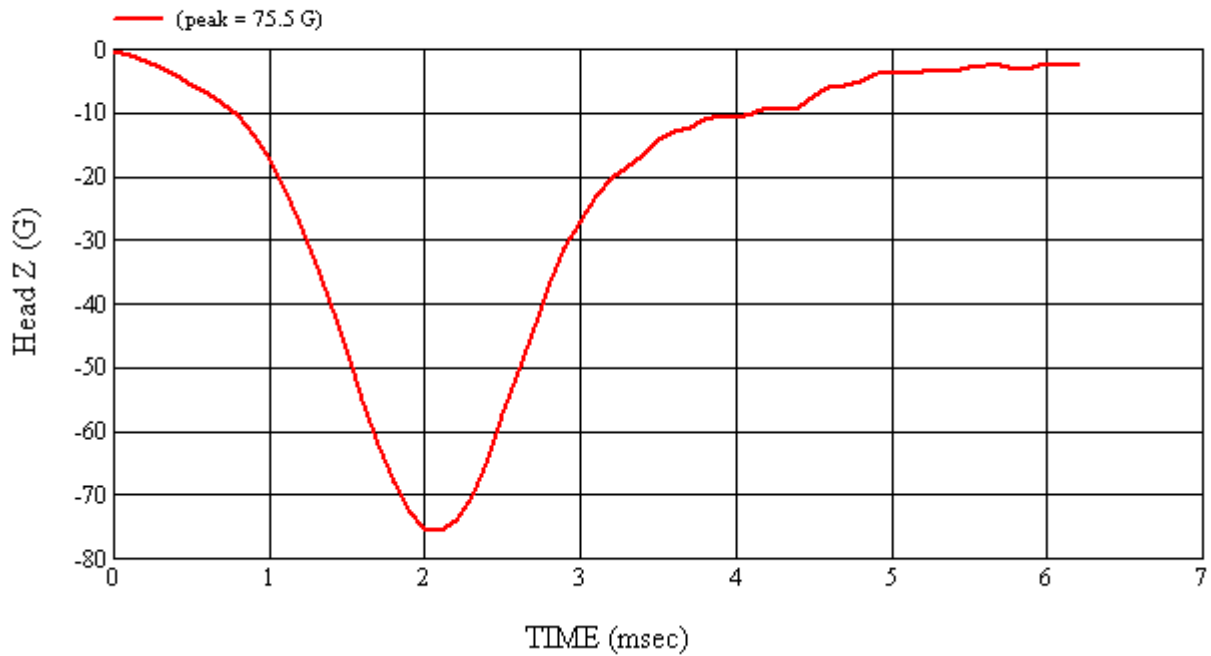

Head 35 (Post) Calibration #H35014



**4-3 Pre-Test Calibration**

**HEAD DROP TEST SUMMARY  
 PART 572L**


HEADFORM SERIAL NUMBER: 037		CALIBRATION DATE: 5/12/2009
CALIBRATION TIME: 5:40:39 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.96
Temperature	19° C to 26° C	20.9
Relative Humidity	10% to 70%	45.8
Peak Resultant Acceleration	225 G's to 275 G's	252.2
Peak Lateral Acceleration	15 G's Maximum	4.8
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	AHTB2	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J14103	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35800	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/12/2009


APPROVED BY: 

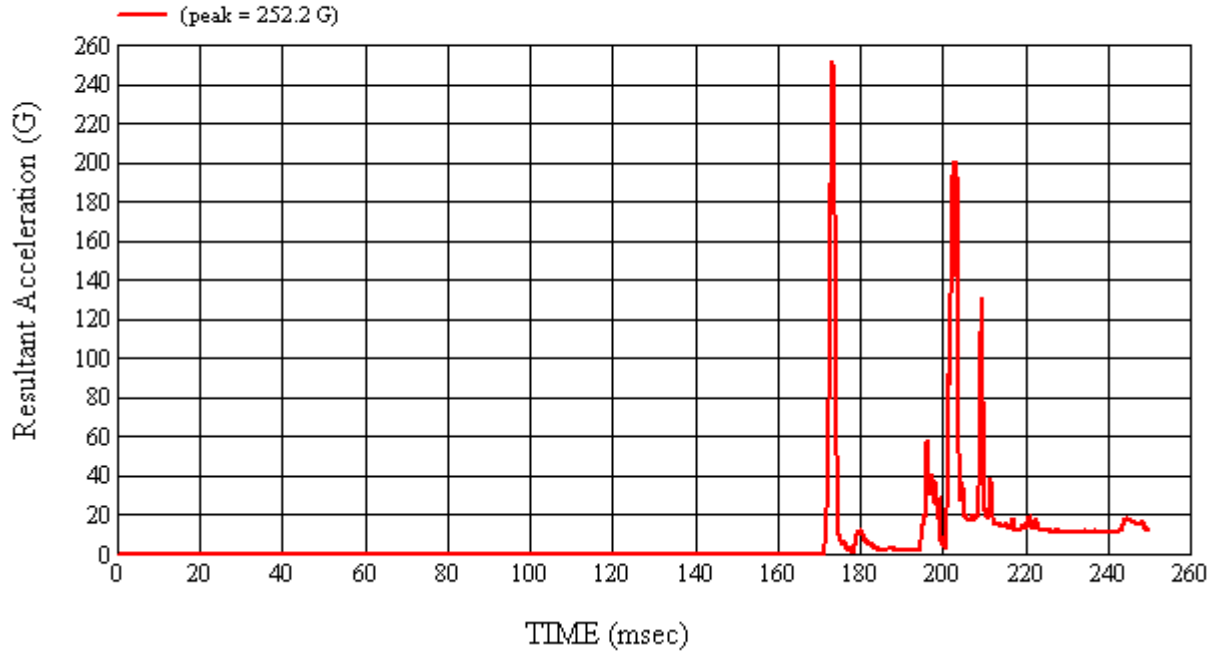


Head 037 (Pre) Calibration #H37013

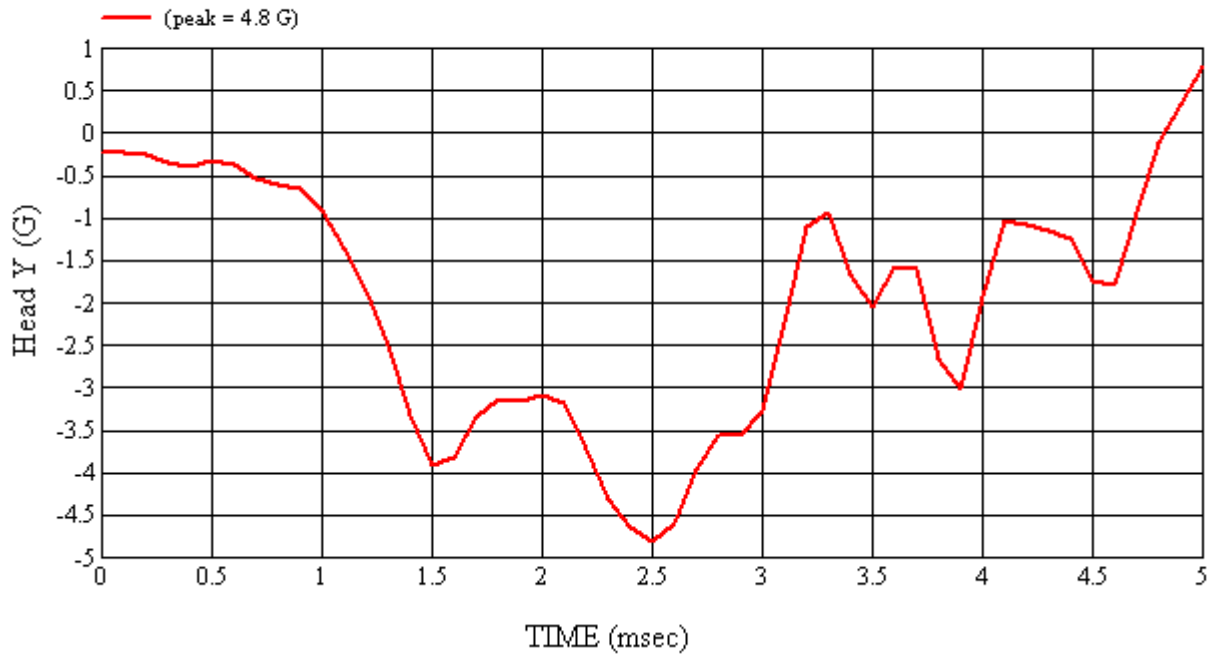

Head 037 (Pre) Calibration #H37013

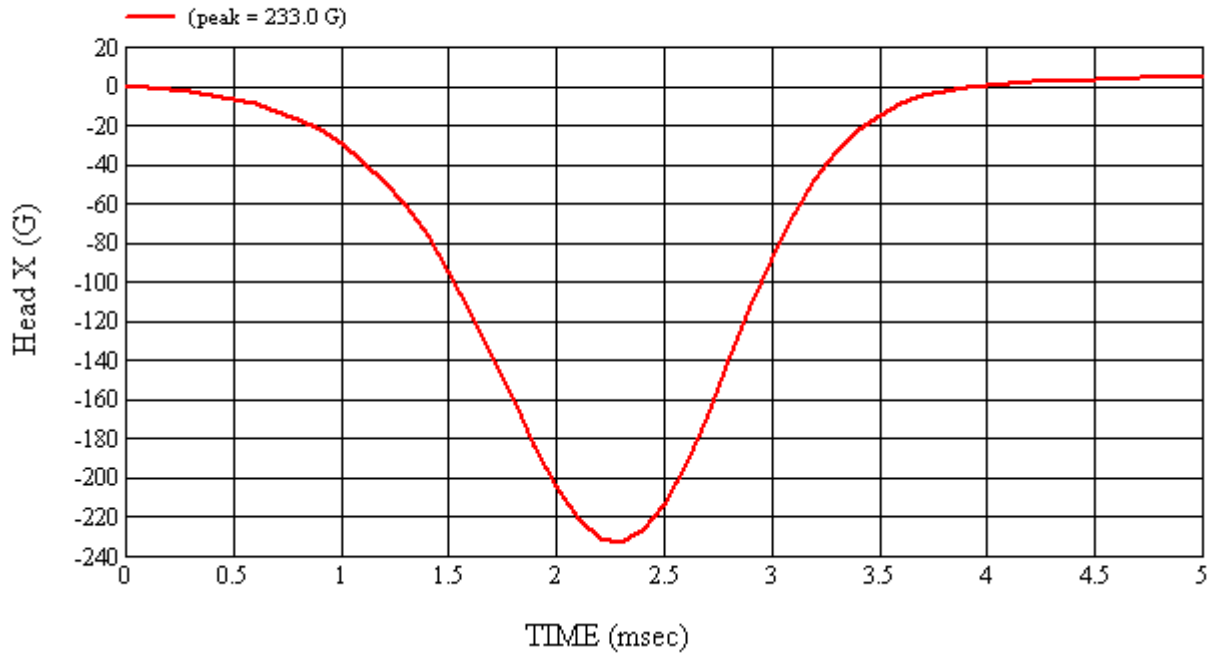

Head 037 (Pre) Calibration #H37013

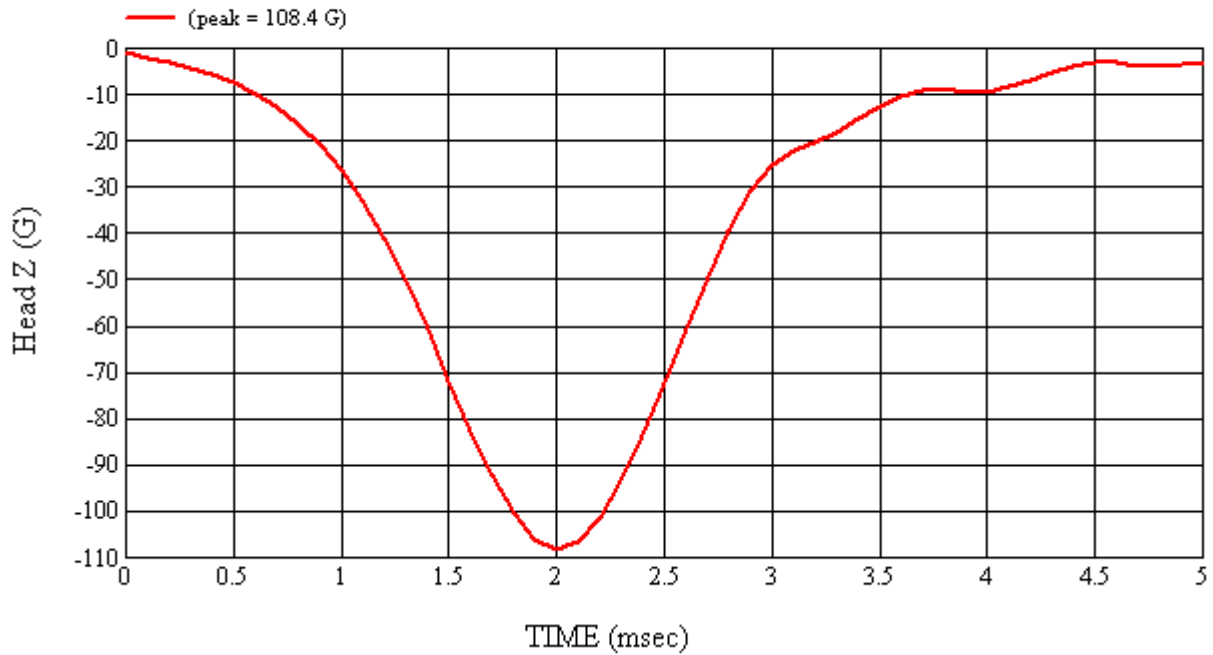

Head 037 (Pre) Calibration #H37013

**4-4 Post-Test Calibration**

**HEAD DROP TEST SUMMARY  
 PART 572L**


HEADFORM SERIAL NUMBER: 037		CALIBRATION DATE: 5/18/2009
CALIBRATION TIME: 3:10:30 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.96
Temperature	19° C to 26° C	20.9
Relative Humidity	10% to 70%	35.1
Peak Resultant Acceleration	225 G's to 275 G's	252.8
Peak Lateral Acceleration	15 G's Maximum	4.4
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	AHTB2	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J14103	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35800	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/18/2009


APPROVED BY: 

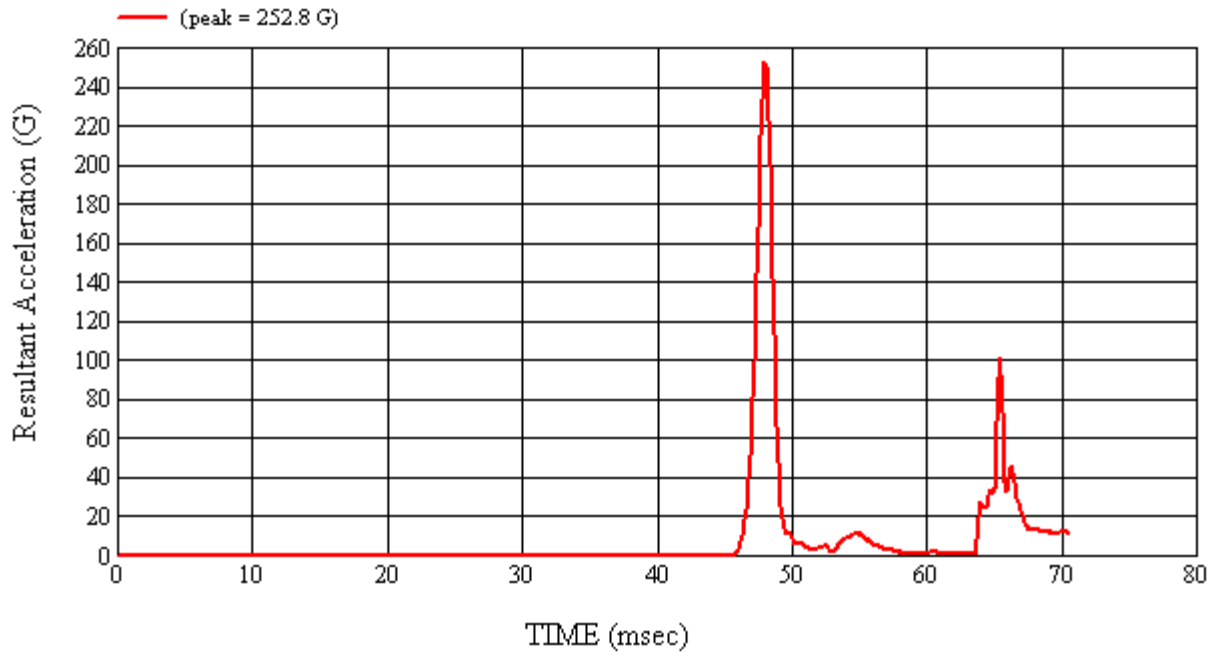


Head 037 (Post) Calibration #H37014

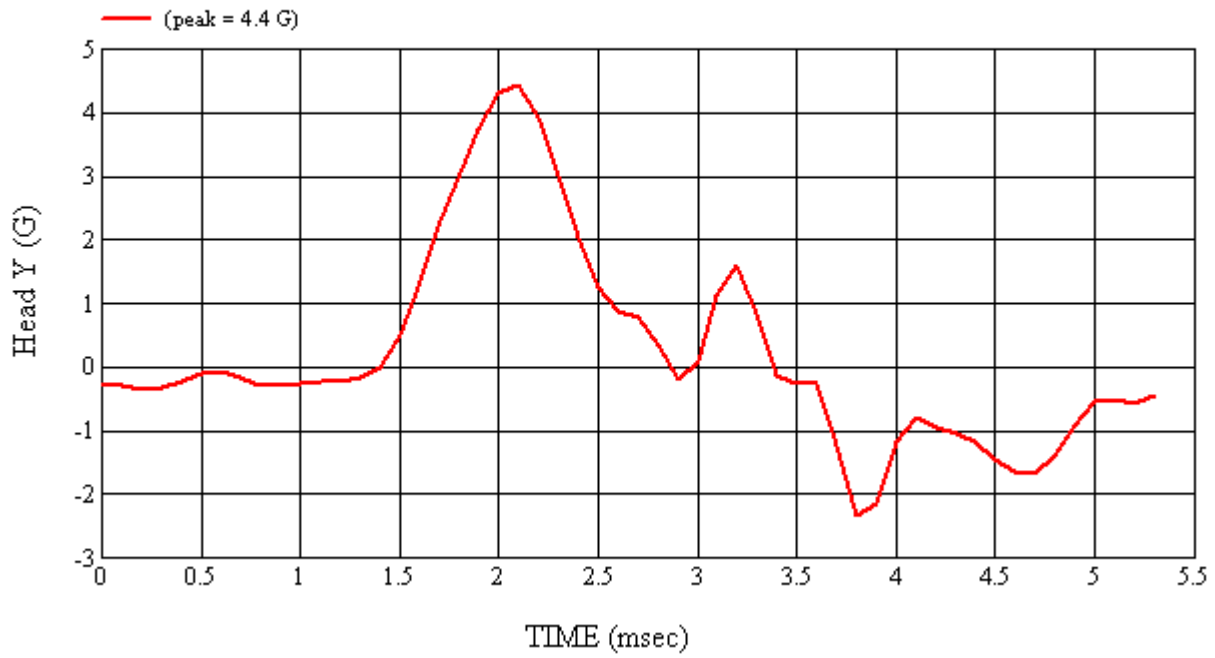

Head 037 (Post) Calibration #H37014

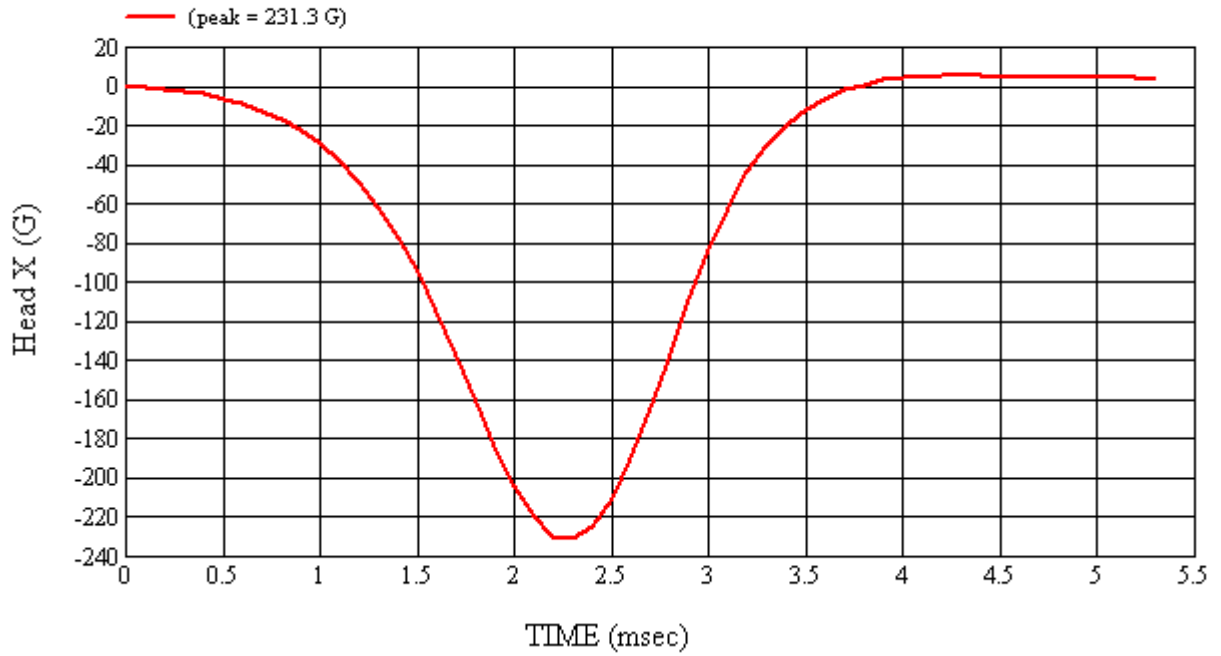

Head 037 (Post) Calibration #H37014

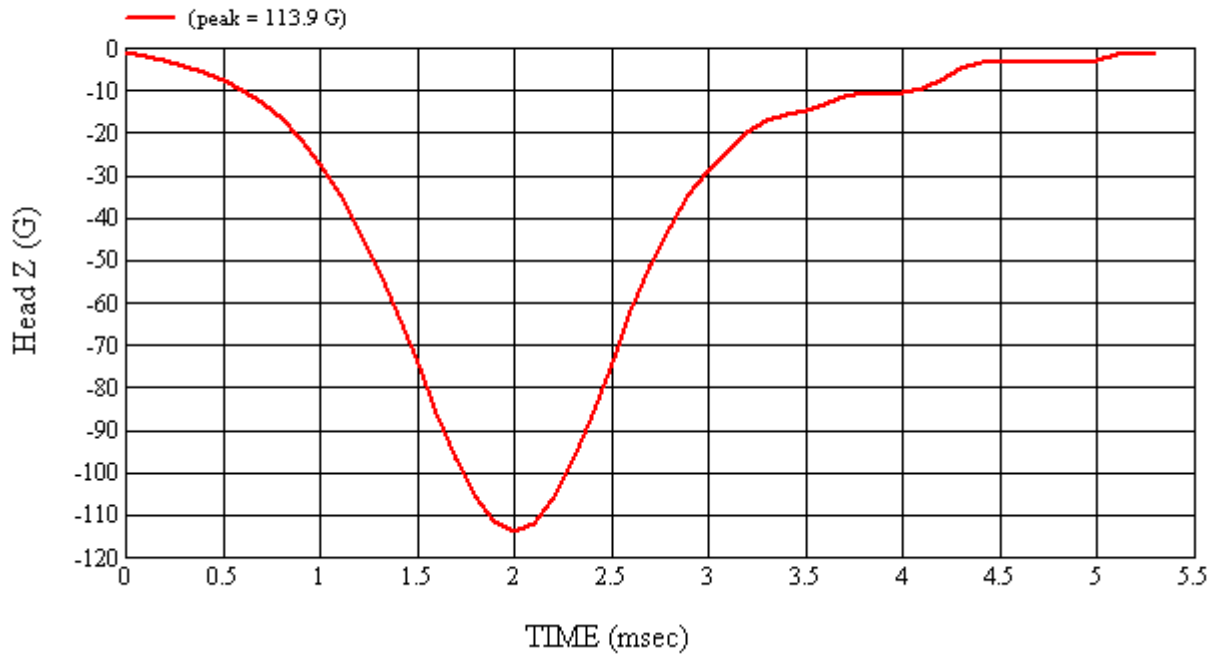

Head 037 (Post) Calibration #H37014

**4-5 Pre-Test Calibration**

**HEAD DROP TEST SUMMARY  
 PART 572L**

HEADFORM SERIAL NUMBER: 038		CALIBRATION DATE: 5/12/2009
		CALIBRATION TIME: 5:53:18 PM
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	20.9
Relative Humidity	10% to 70%	45.8
Peak Resultant Acceleration	225 G's to 275 G's	252.7
Peak Lateral Acceleration	15 G's Maximum	8.8
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J22700	04/17/09	10/17/09
2	ENDEVCO	7264-2000	J36197	04/17/09	10/17/09
3	ENDEVCO	7264-2000	J36353	04/17/09	10/17/09

REMARKS:


RECORDED BY: 

DATE: 5/12/2009

APPROVED BY: 

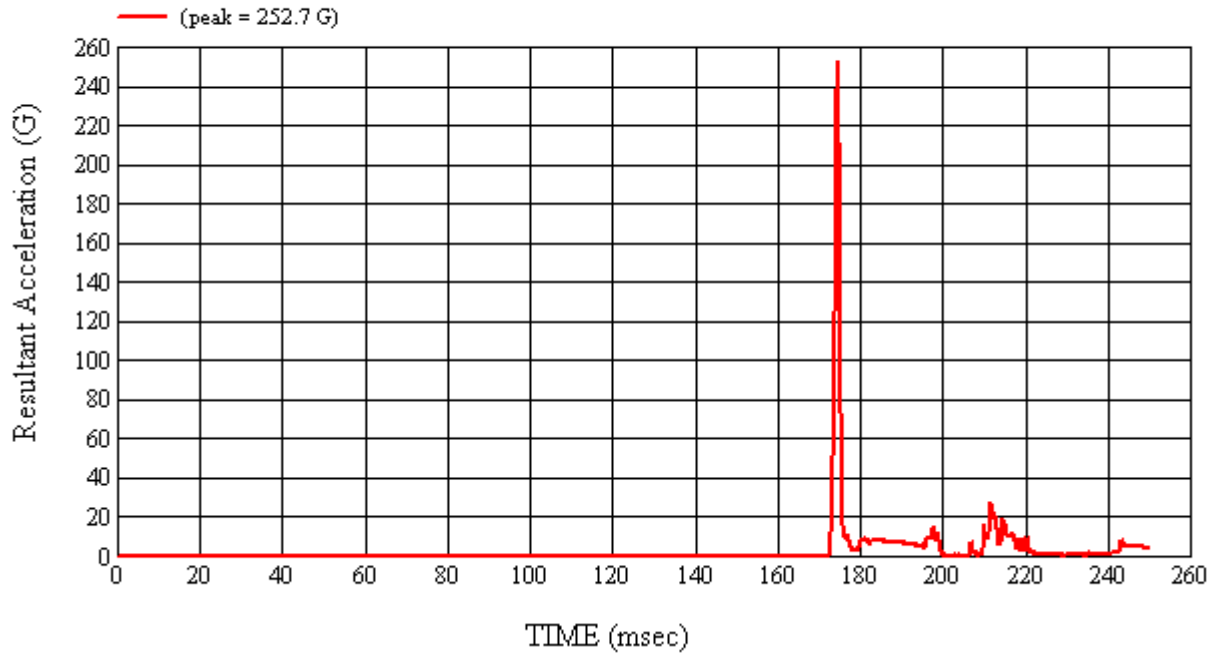


Head 038 (Pre) Calibration #H38013

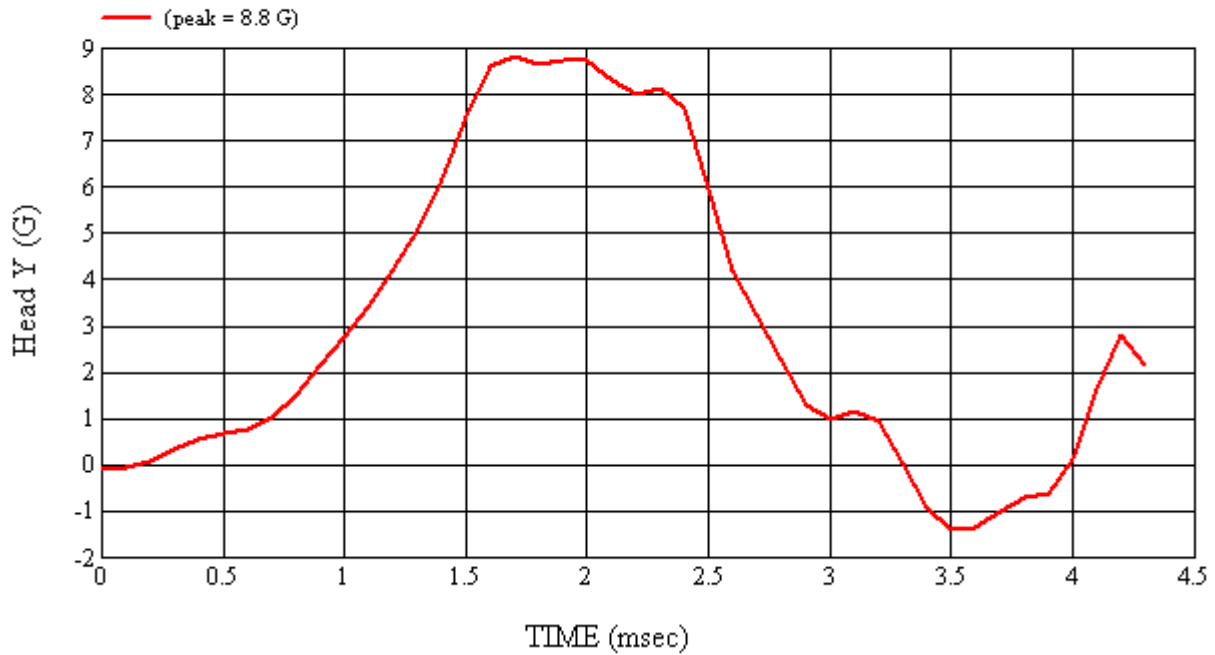


Head 038 (Pre) Calibration #H38013



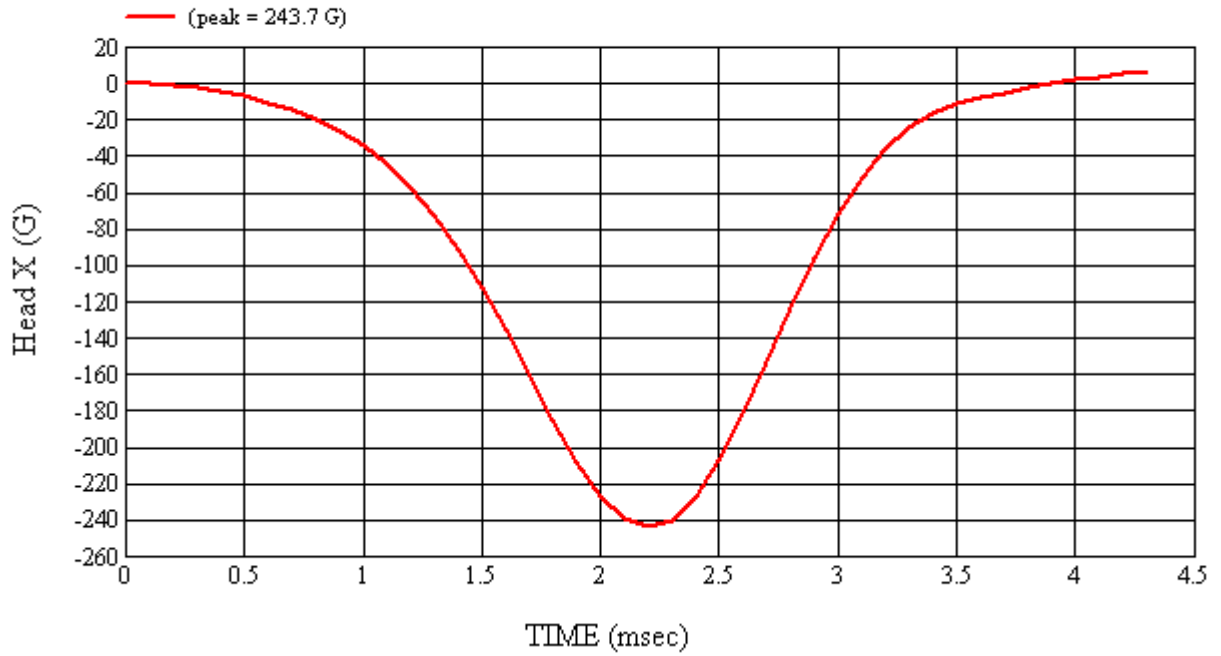

Head 038 (Pre) Calibration #H38013

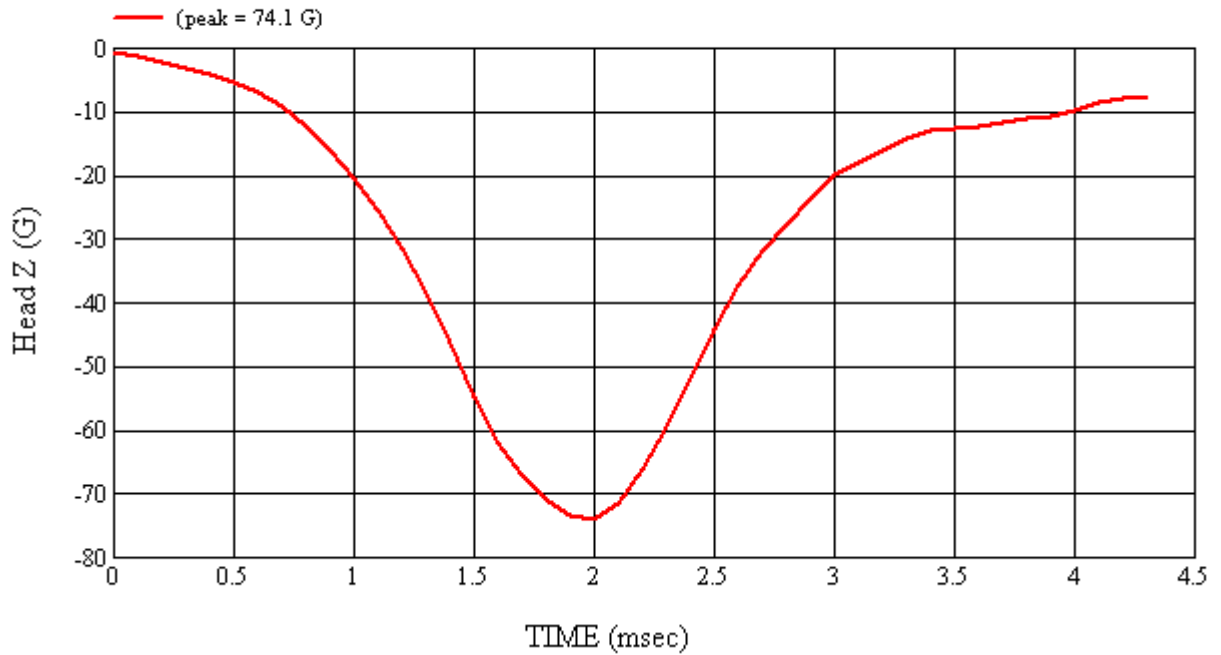

Head 038 (Pre) Calibration #H38013

**4-6 Post-Test Calibration**

**HEAD DROP TEST SUMMARY  
 PART 572L**


HEADFORM SERIAL NUMBER: 038		CALIBRATION DATE: 5/18/2009
CALIBRATION TIME: 4:02:47 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	20.9
Relative Humidity	10% to 70%	35.1
Peak Resultant Acceleration	225 G's to 275 G's	254.6
Peak Lateral Acceleration	15 G's Maximum	10.4
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J22700	04/17/09	10/17/09
2	ENDEVCO	7264-2000	J36197	04/17/09	10/17/09
3	ENDEVCO	7264-2000	J36353	04/17/09	10/17/09

REMARKS:


RECORDED BY: 

DATE: 5/18/2009


APPROVED BY: 

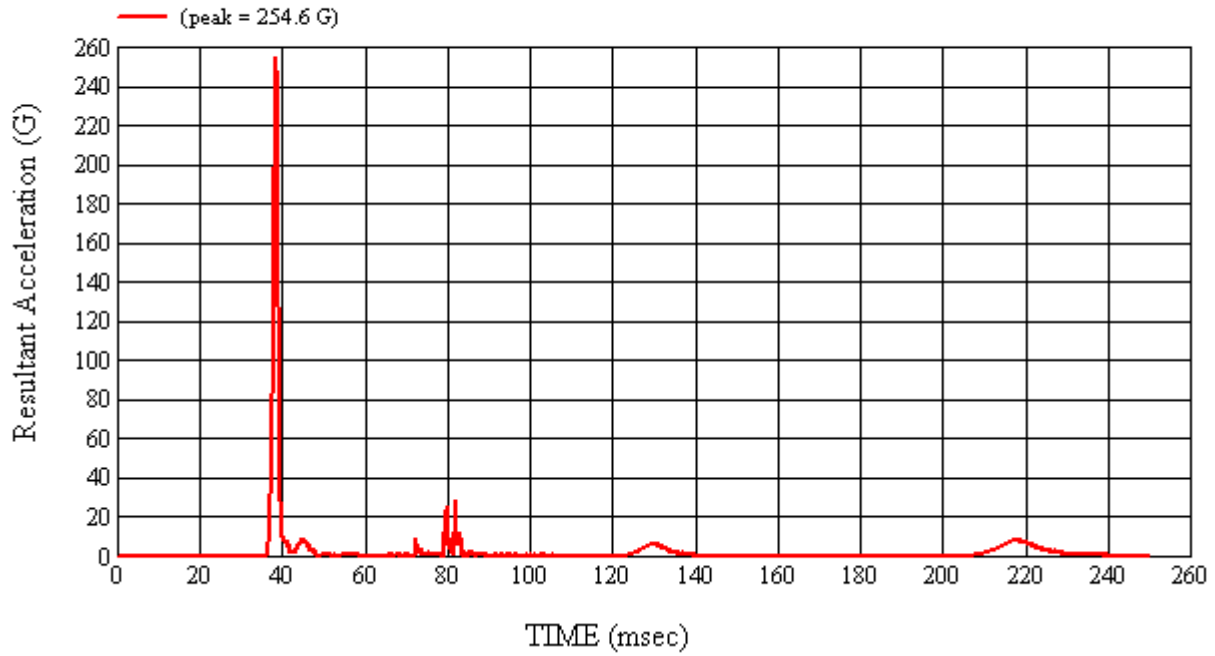


Head 038 (Post) Calibration #H38014

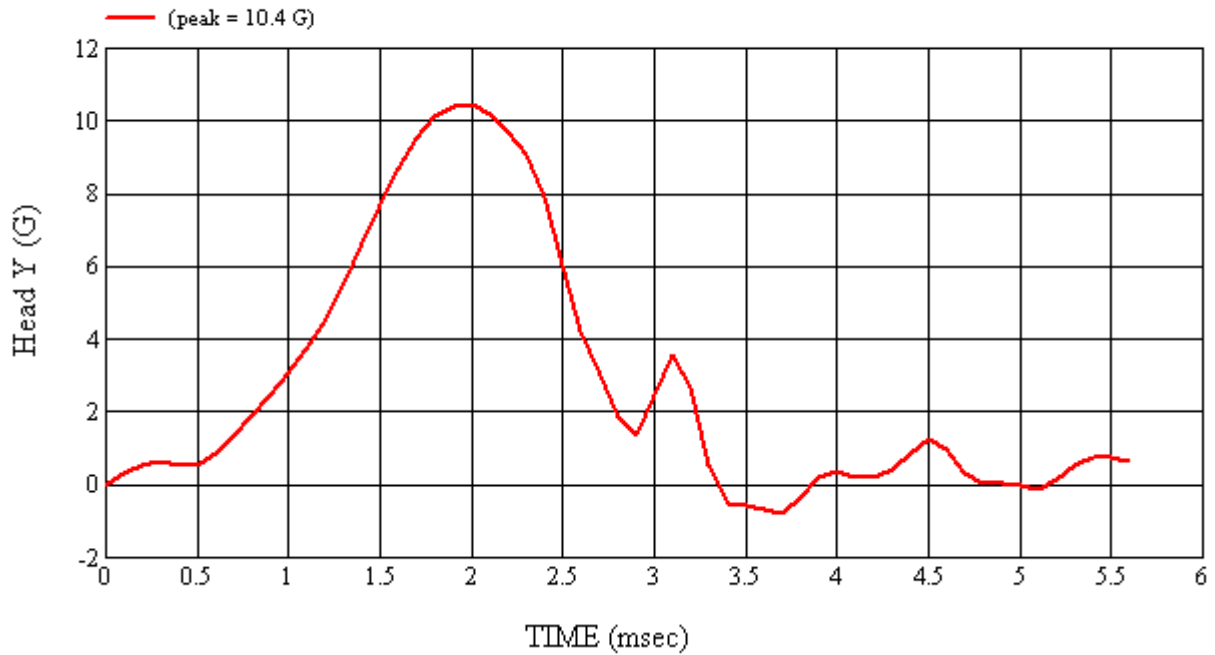

Head 038 (Post) Calibration #H38014

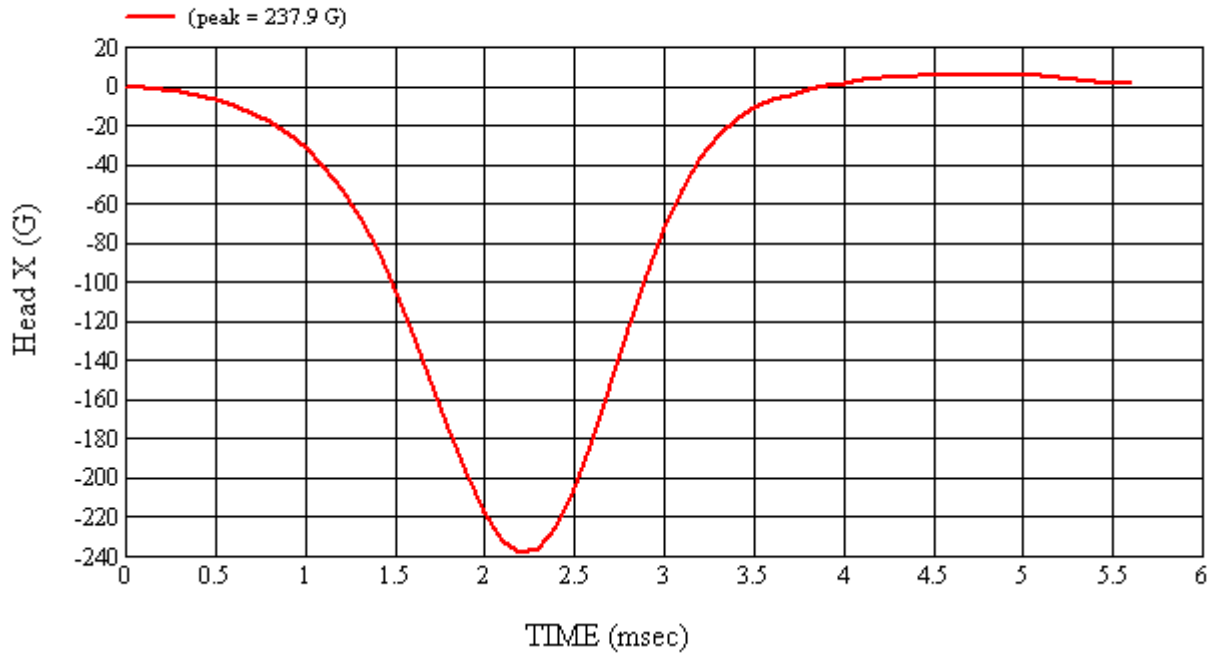

Head 038 (Post) Calibration #H38014

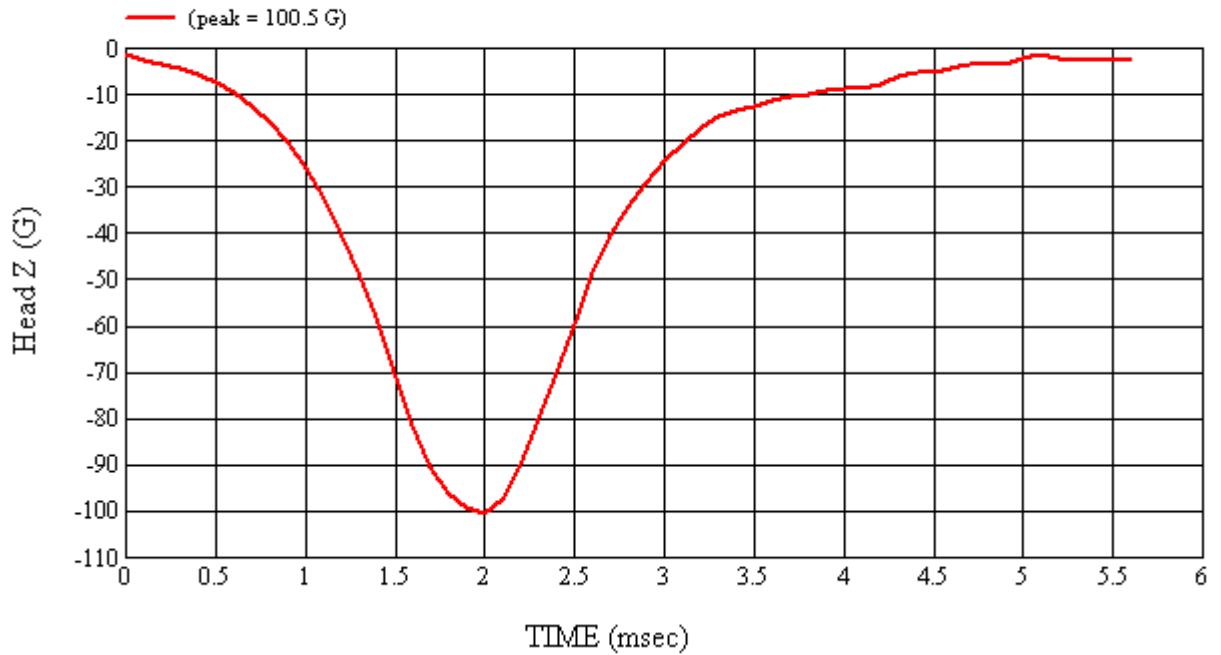

Head 038 (Post) Calibration #H38014

## 5.0 PHOTOGRAPHS



**As Delivered – Left Side View**



**As Delivered – Right Side View**




**As Delivered – ¾ Front View From Left Side**



**As Delivered – ¾ Rear View From Right Side**



As Delivered – Vehicle’s Certification Label

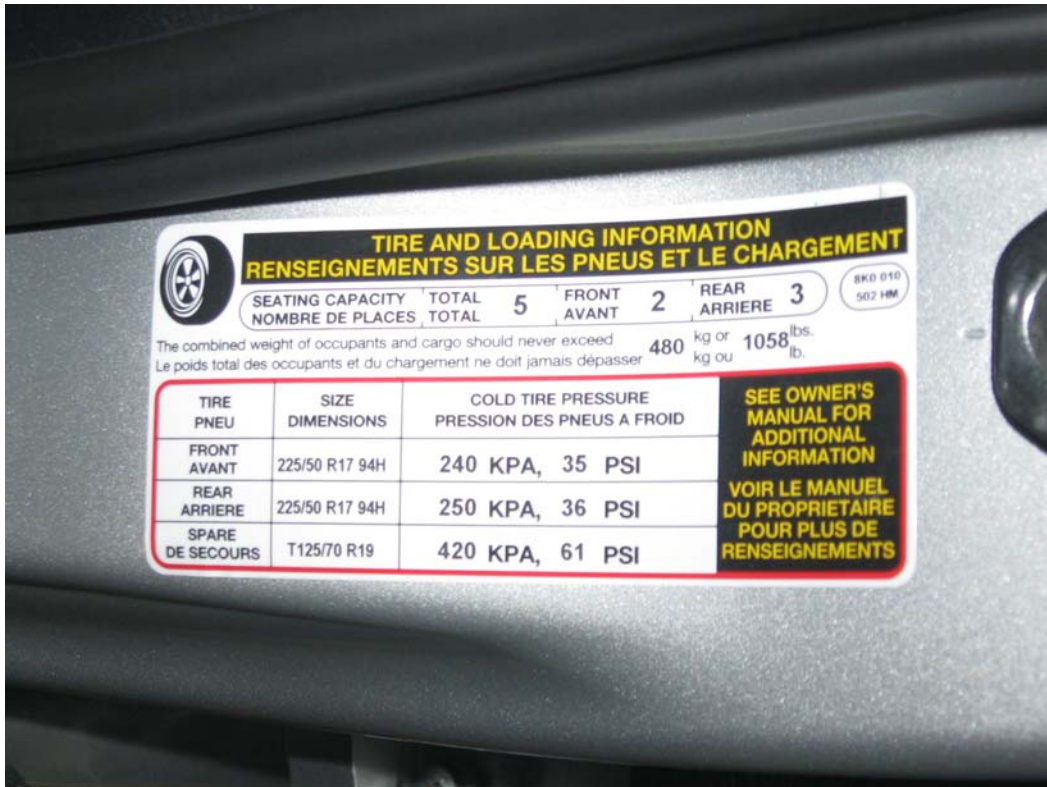

As Delivered – Vehicle’s Tire Information Label

**Pre-Test Component Photographs**












### Post-Test Component Photographs

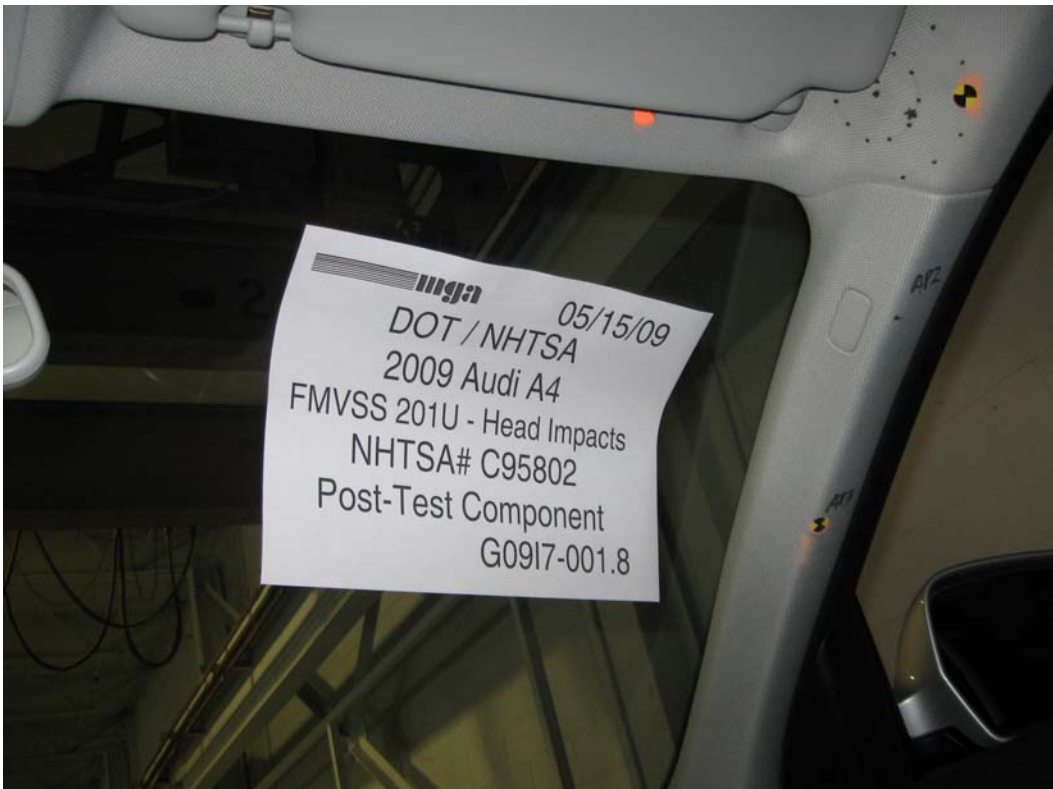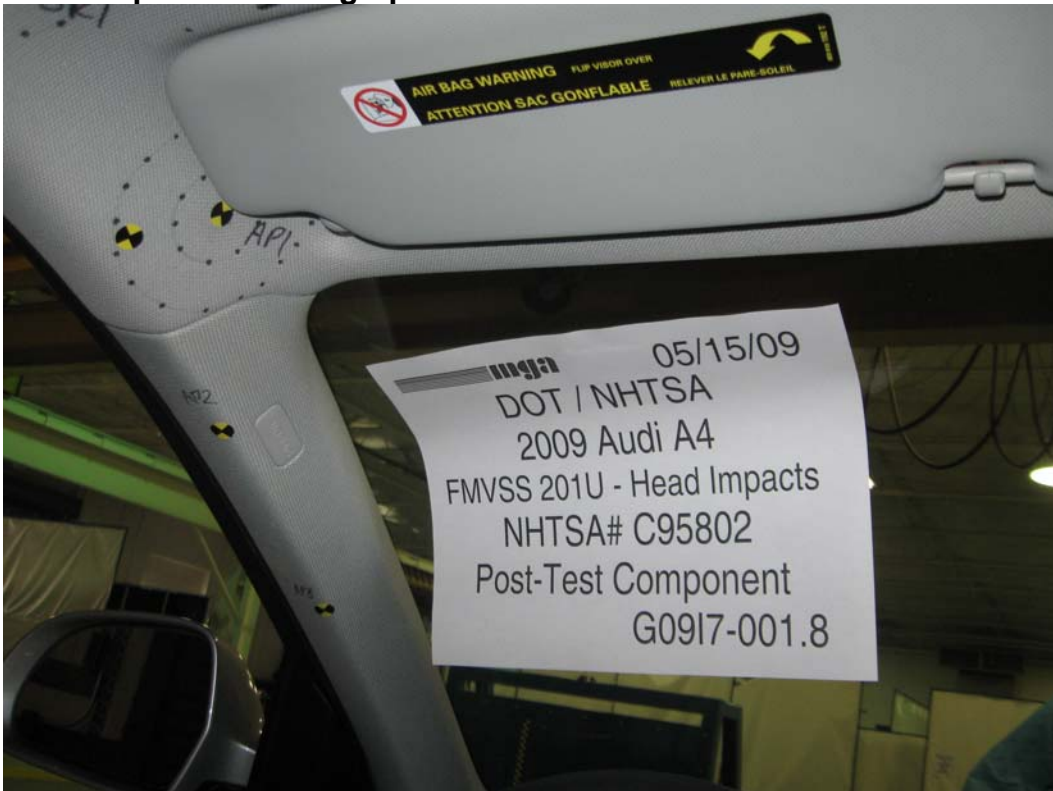





Appendix A – Temperature Trace

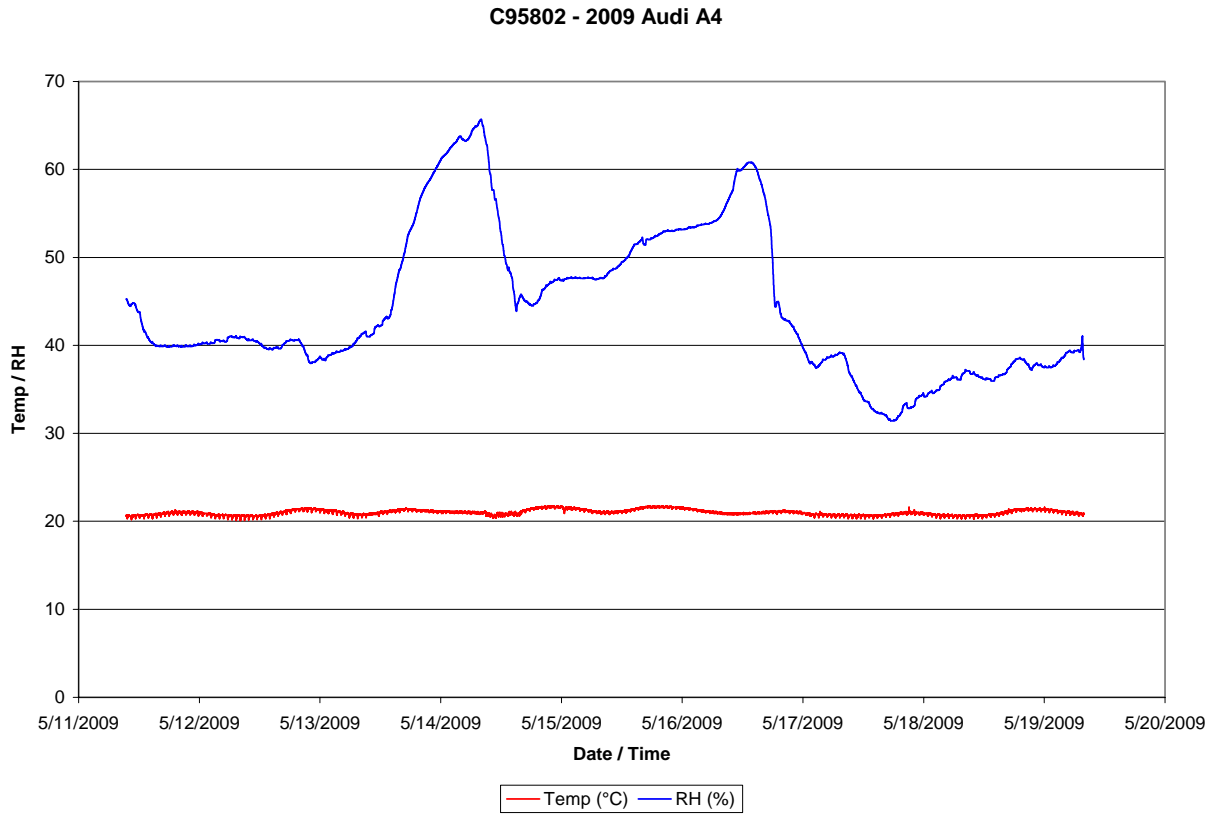



MICHIGAN OPERATIONS  
 DATE: 2/7/04  
 SUPERCEDES: MGATPTMC.5

DOC. NO.: MGATPTMC  
 REVISION NO.: 6  
 PAGE 3 OF 3

**Tape Measure Calibration Certificate**

Reference Steel Rule

Brand: SWANSON  
 S/N: MLA 00798  
 Calibration Date: 1/15/09

Subject Tape Measure

Brand: TPM 906 Stanley  
 S/N: TPM 906  
 Calibration Date: 1/23/09

Reference (in)(mm)	Subject Tape Measure	Difference	Reference (in)(mm)	Subject Tape Measure	Difference
0 (0)	0	0	18 (450)	18	0
1 (25)	1	0	19 (475)	19	0
2 (50)	2	0	20 (500)	20	0
3 (75)	3	0	21 (525)	21	0
4 (100)	4	0	22 (550)	22	0
5 (125)	5	0	23 (575)	23	0
6 (150)	6	0	24 (600)	24	0
7 (175)	7	0	25 (625)	25	0
8 (200)	8	0	26 (650)	26	0
9 (225)	9	0	27 (675)	27	0
10 (250)	10	0	28 (700)	28	0
11 (275)	11	0	29 (725)	29	0
12 (300)	12	0	30 (750)	30	0
13 (325)	13	0	31 (775)	31	0
14 (350)	14	0	32 (800)	32	0
15 (375)	15	0	33 (825)	33	0
16 (400)	16	0	34 (850)	34	0
17 (425)	17	0	35 (875)	35	0

If all differences are  $\pm 1/32$  of an inch (1 mm), then the tape measure is acceptable.  
 Pass  Fail  Maximum Difference = 0

Date: 1/23/2009 Performed By: [Signature]

All calibrations are traceable to the National Institute of Standards and Technology. Estimated uncertainty of the measurement is  $\pm 0.2\%$ . All certification data and equipment are on file for inspection at your request. Best uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor  $k=2$ .





4700 Barden Court SE, Kentwood MI 49512, Telephone: 616-698-3124, Fax: 616-698-2364, www.metrocal.com

### Certificate of Calibration

**MGA Research**  
 446 Executive Drive  
 Troy, MI 48083

Order Number: 59696  
 Certificate Number: 080604806  
 Page: 1 of 1

Gauge Number: MGA00730  
 Gauge Desc: Digital Protractor  
 Manufacturer: Mitutoyo  
 Model Number: N/A  
 Serial Number: N/A

Customer PO: A070681  
 Last Calibration: N/A  
 Calibration Date: 6/4/08  
 Next Calibration: 6/4/09

As Found Condition: In Tolerance

As Left Condition: In Tolerance

MetroCal, Inc maintains reference standards of measurement which are traceable to the National Institute of Standards and Technology, or other authorized National Standards. Calibration was performed in accordance with MetroCal Procedure CP045 and complies with the ANSI/NCSL Z540-1 and ISO/IEC 17025 Standards. Results shall not be reproduced, except in full, without the written approval of MetroCal, Inc. Results relate only to the item(s) calibrated. Any number of factors may cause the calibration item to drift out of calibration before the recommended interval has expired. Statements of compliance made using simple acceptance rule.

Standard Used	Cal Date	Due Date	Traceable No.	Calibration Procedure Uncertainty Expressed at 95% confidence (K=2)
Gage Blk Set ID# 105	6/12/07	6/12/08	821/273187-06	0.0015°
DoAll Sine Bar ID#1879	12/31/07	12/31/08	Cert# 071231399	0.0015°

**Results:**


Units	As Found Readings		
	Nominal	Actual	Deviation
Decimal Deg.	5.00	5.0	0.00
	10.00	10.1	0.10
	20.00	20.0	0.00
Tolerance ± 0.1°	30.00	30.0	0.00
	40.00	40.0	0.00

Reference Level Check: Within ± 0.1 degrees

As Left Readings		
Nominal	Actual	Deviation
5.00	5.0	0.00
10.00	10.1	0.10
20.00	20.0	0.00
30.00	30.0	0.00
40.00	40.0	0.00

Reference Level Check: Within ± 0.1 degrees

Comments: Environmental conditions during calibration: 68 °F, 41% RH.

  
 Issued: 6/5/08  
 Shannon Shoemaker/bjk  
 Calibration Technician

Checked box indicate this calibration was performed at the customers facility.

*JA 6/6/08*



# Certificate of Calibration

**Schober Calibration Service, Inc.**

2550 Oakley Park Road, Suite #300  
Walled Lake, MI 48390

Phone: (248) 926-6000 FAX: (248) 926-6006



CALIBRATION 1563.01

**Certificate Number:** 0002521:1244035703

**CUSTOMER:** MGA Research Corporation Calibration Location: **On-site**  
446 Executive Drive  
Troy MI 48083  
Contact: Thomas Hutter

### Equipment Calibrated

Manufacturer: Dickson Date Received: 06/03/2008  
Description: Temp/Humidity Recorder Date Calibrated: 06/03/2009  
Model Number: FH125 Calibration Due Date: 06/03/2010  
Serial Number: 06018122 Calibration Procedure: CP0001  
Asset Number: MGA00717 Revision:  
Received Status: Good Performed By: P. Vella

**Condition as Received: In Tolerance**

**Condition as Returned: In Tolerance**

### Notes:

#### Ambient Calibration Conditions

Ambient Temperature: 23 °C Relative Humidity: 45 % RH Barometric Pressure: mbar

#### Calibration Equipment Used

Asset Number:	Manufacturer:	Model:	Serial:	Cal Due:
RMS042	Fluke/Hart	1502A	A6C537	24 Apr 2010
RMS043	Hart Scientific	5614	778109	24 Apr 2010
RMS045	Vaisala	HMP76	C0630009	27 Mar 2010

The Uncertainty is estimated using expanded uncertainties and coverage factor (k) of 2, providing a confidence level of approximately 95%.  
This calibration is traceable to the international system of units (SI) through standards calibrated by accredited laboratories, or through standards calibrated at NIST. This laboratory meets the requirements of ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994. This certificate shall not be reproduced, except in full, without prior written approval by Schober Calibration Service.  
Calibration interval determined by the customer. When determining the calibration interval, the customer should take into consideration that any number of factors may cause the calibration item to drift out of calibration before the calibration interval has expired.  
The results herein apply only to the calibration of the item described above. No sampling plan was used for this calibration.

Approved By: Debra Sule Quality Manager

Date: 6-17-09

Till #  
6/21/09

**Calibration Data**

MFG/MODEL: Dickson / FH125 Serial / ID #: 06018122 / MGA 00717  
 Customer: MGA Research Date Calibrated: 06/03/09  
 Certificate No.: 0002521:1244035703

*All calculations and data transfers have been reviewed for accuracy and completeness*

Range	Nominal	Lower Limit	As Found	As Left	Upper Limit
Data Logger with Sensor System Tests					
Channel 1					
	-9.7° F	-11.5° F	-9.1° F	-9.1° F	-7.9° F
	75.1° F	73.3° F	75.6° F	75.6° F	76.9° F
	103.3° F	101.5° F	102.6° F	102.6° F	105.1° F
Channel 2 (RH @ 21° C)					
	41.1 %rh	39.1 %rh	42.5 %rh	42.5 %rh	43.1 %rh
	71.8 %rh	69.8 %rh	70.7 %rh	70.7 %rh	73.8 %rh
Calibration Performed By: P. Vella					

**Bold Font Indicates Out Of Tolerance Condition.**

Unless otherwise noted  
 As Found = As Left

Calibration Data Report  
 (Non-Automated)  
 IF0097

Page 2 of 2

C/AA/09



4700 Barden Court SE, Kentwood MI 49512, Telephone: 616-698-3124, Fax: 616-698-2364, www.metrocal.com

Certificate of Calibration

MGA Research  
 446 Executive Drive  
 Troy, MI 48083

Order Number: 60394  
 Certificate Number: 080711801  
 Page: 1 of 1

Gauge Number: MGA00081  
 Gauge Desc: 0 to 20lb x 0.01lb Digital Scale  
 Manufacturer: Detecto  
 Model Number: AP-20  
 Serial Number: E33603-0213

Customer PO: A070765  
 Last Calibration: 7/9/07  
 Calibration Date: 7/11/08  
 Next Calibration: 7/11/09

As Found Condition: In Tolerance

As Left Condition: In Tolerance

MetroCal Inc. maintains reference standards of measurement which traceable to the National Institute of Standards and Technology, or other authorized National Standards. Calibration was performed in accordance with MetroCal's Procedure No. CP-042 and the relevant sections of the manufacturers manual. This Calibration complies with the ISO/IEC 17025 and ANSI/NCSL Z540-1 Standards. Results shall not be reproduced except in full without the written approval of MetroCal Inc. Results relate only to the item(s) calibrated. Any number of factors may cause the calibration item to drift out of calibration before the recommended interval has expired. Statements of compliance made using simple acceptance rule.

Calibration Procedure  
 Uncertainty Expressed at  
 95% confidence, (K=2)  
 +/-0.001% of Load

Standard Used	Cal. Date	Due Date	Traceable No.
Weight Set ID# 2463	8/10/06	8/10/08	MI-04-06-8325

Results:  
 Tolerance used: ± 0.02

Units: lbs TI Division/Increment: 0.01

Weight Test	As Found			As Left		
	Nominal	Indication	Deviation	Nominal	Indication	Deviation
0-25% fs	5	5.00	0.00	5	5.00	0.00
26-50% fs	10	9.99	-0.01	10	9.99	-0.01
51-75% fs	15	14.99	-0.01	15	14.99	-0.01
76-100% fs	20	19.99	-0.01	20	19.99	-0.01
Shift Test:	Pass			Shift Test:	Pass	
Half Load Test:	Pass			Half Load Test:	Pass	

Comments: Environmental conditions during calibration: 68 °F, 46 % RH.

Shannon Shoemaker/bjk  
 Calibration Technician

Issued: 7/15/08

Checked box indicate this calibration was performed at the customers facility.

*JA* 7/17/08

Sterling Scale Co., Inc.  
 20950 Boening St.  
 Southfield, MI 48075

Certificate of Calibration

F41012-3  
 Rev. Date 11/23/05



calibration cert. 1448.01

Customer: MGA Research Cert# 08-4587 Temp/Humidity: 70-20  
 Location of Calibration: 2839 Elliott Ave. Troy MI 48063  
 Calibration Date: 6/15/2008 Cal Dura: T-09 Condition of Item: Good  
 Equipment Make: Intertec Model: SWD Deluxe Serial ID: 28032389  
 Capacity: single pad capacity 2200 x 1lb

Applied Test Wt	Before Adjustment	Tolerance	In-Tolerance Y/N	After Adjustment	In-Tolerance Y/N	Unc .5lb
1000b	1000b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb
1000b	1011b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb
1000b	1000b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb
1000b	1000b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb

shift test

Platform #1 Platform #2 Platform #3  
 Pass  Pass  Pass  
 Fail  Fail  Fail

Tests performed:  Repeatability  Linear  Sensitivity  Discrimination

Technician: System passes all tests.

Test wts used: Our test weights s/n on file.

Scale Certified  Scale Rejected

Sterling Scale Service Rep: ED Date: 6/12/2008 1 of 1  
 The above item has been calibrated using the relevant EPO or OEM procedures utilizing test weights traceable to International Systems of Units (SI), through the Michigan Department of Agriculture. Test numbers on file. Expanded uncertainty (k=2) confidence level of 95% as reported. Results relate only to items listed. The reported uncertainty is valid only for the environment in which it is determined. Any number of factors may cause the item to drift out of calibration before recommended interval has expired. This report shall not be reproduced, except in full without approval of the laboratory. Tolerances followed are maintenance/acceptance per HB 44 or as determined by the customer.

QA 6/19/08

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J35919
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) <sup>1</sup> 95.6  
100K SHUNT

Linearity: <sup>2</sup> 0.99981

New vs Old Sensitivit  
(% Difference) -0.4


Temperature: 69.9 ° F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026030

Calibrated By: Thomas Miller

Signature:  \_\_\_\_\_

Approved by:  \_\_\_\_\_

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J22664
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) <sup>1</sup> 94.3  
100K SHUNT

Linearity:<sup>2</sup> 0.99958


New vs Old Sensitivit  
(% Difference) -0.5


Temperature: 69.9 °F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026381

Calibrated By: Thomas Miller

Signature: 

Approved by: 

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J35924
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) <sup>1</sup> 92.8  
100K SHUNT

Linearity:<sup>2</sup> 0.99935


New vs Old Sensitivit  
(% Difference) -0.4

Temperature: 69.9 °F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026815

Calibrated By: Thomas Miller

Signature:  \_\_\_\_\_

Approved by:  \_\_\_\_\_

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$  .

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.



**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	AHTB2
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) <sup>1</sup> 115.9  
100K SHUNT

Linearity: <sup>2</sup> 0.99947


New vs Old Sensitivit  
(% Difference) -0.7


Temperature: 69.9 ° F

Humidity: 38 %

Sensitivity (mV/V/G): 0.021450

Calibrated By: Thomas Miller

Signature:  \_\_\_\_\_

Approved by:  \_\_\_\_\_

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$  .

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J14103
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) <sup>1</sup> 93.7  
100K SHUNT

Linearity:<sup>2</sup> 0.99893


New vs Old Sensitivit  
(% Difference) -0.9


Temperature: 69.9 °F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026528

Calibrated By: Thomas Miller

Signature: 

Approved by: 

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J35800
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) <sup>1</sup> 97.1  
100K SHUNT

Linearity:<sup>2</sup> 0.99893


New vs Old Sensitivit  
(% Difference) -0.5


Temperature: 69.9 °F

Humidity: 38 %

Sensitivity (mV/V/G): 0.025575

Calibrated By: Thomas Miller

Signature: 

Approved by: 

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #:	352C03	Manufacturer:	Endevco
Serial #:	95980	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J22700
Calibration Date:	7/24/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	PCB		

Calibration Date: 4/17/2009

New DLR(Units:G'S) <sup>1</sup> 94.0  
100K SHUNT

Linearity:<sup>2</sup> 0.99977

New vs Old Sensitivity  
(% Difference) 2.0

Temperature: 70 °F

Humidity: 25 %

Sensitivity (mV/V/G): 0.02647

Calibrated By: Chris Collins

Signature: Chris Collins

Approved by: Donald Kalato

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as 1- (Standard Deviation/ Mean) .

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0% at the 95% confidence level.

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #:	352C03	Manufacturer:	Endevco
Serial #:	95980	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J36197
Calibration Date:	7/24/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	PCB		

Calibration Date: 4/17/2009

New DLR(Units:G'S) <sup>1</sup> 106.3  
100K SHUNT

Linearity:<sup>2</sup> 0.99945

New vs Old Sensitivity  
(% Difference) 2.1

Temperature: 70 °F

Humidity: 25 %

Sensitivity (mV/V/G): 0.023407

Calibrated By: Chris Collins

Signature: Chris Collins

Approved by: Steven D. Kalato

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0% at the 95% confidence level.

**MGA Research Corporation-Calibration Certificate**

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #:	352C03	Manufacturer:	Endevco
Serial #:	95980	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J36353
Calibration Date:	7/24/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	PCB		

Calibration Date: 4/17/2009

New DLR(Units:G'S) <sup>1</sup> 97.5  
100K SHUNT

Linearity: <sup>2</sup> 0.99962

New vs Old Sensitivity  
(% Difference) 1.4

Temperature: 70 °F

Humidity: 25 %

Sensitivity (mV/V/G): 0.025512

Calibrated By: Chris Collins

Signature: Chris Collins

Approved by: Heena R. Kalato

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as  $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0% at the 95% confidence level.



Certificate #: 125456001

T



**Customer:** MGA Research Corporation  
**Shipper #:** 5000 Warren Road  
**Address:** Burlington, WI 53105  
**Contact:** Chris  
**PO #:** 03-08-0141

**Manufacturer:** PCB  
**Model:** 484B06  
**Description:** Power Unit  
**Serial Number:** 00001438  
**Asset Number:**  
**Barcode:**

**As Received** In Tolerance X  
 Out of Tolerance  
 Insufficiently  
 Operational  
 Damaged  
 N/A

**As Returned** In Tolerance X  
 Out of Tolerance  
 Insufficiently  
 Operational  
 Damaged  
 N/A

**Action Taken** Full Calibration X  
 Spot Check  
 Open  
 Adjusted  
 Replaced  
 Cleaned  
 Returned As Is

**Cal Date:** 09/18/2008  
**Due Date:** 09/18/2009  
**Temperature:** 73.00 deg. F  
**Humidity:** 36.00 %  
**Baro. Pres.:**  
**Precedent:** DCK (S156  
**Reference:** manufacturer's manual

**Incoming Remarks:** Replacement for unit on WOH132720066. In case with connector cable/power cord and accelerometer in case.

**Technical Remarks:** Uncertainty data to follow.

Cert. #	Manufacturer	Model #	Description	Cal Date	Die Date
108256017	TMS	9155C	Accelerometer Calibration W	02/18/2008	07/18/2009
108256027	PCB	442A102	Signal Conditioner	01/10/2008	01/10/2009


ID	Manufacturer	Model	Description	Serial Number
84592	PCB	Q333B01	Accelerometer	84592

**System Instrumentation Includes**

Model	Description
Q333B01	Accelerometer

**Calibration Standards Utilized**

Model #	Description	Cal Date	Die Date
9155C	Accelerometer Calibration W	02/18/2008	07/18/2009
442A102	Signal Conditioner	01/10/2008	01/10/2009

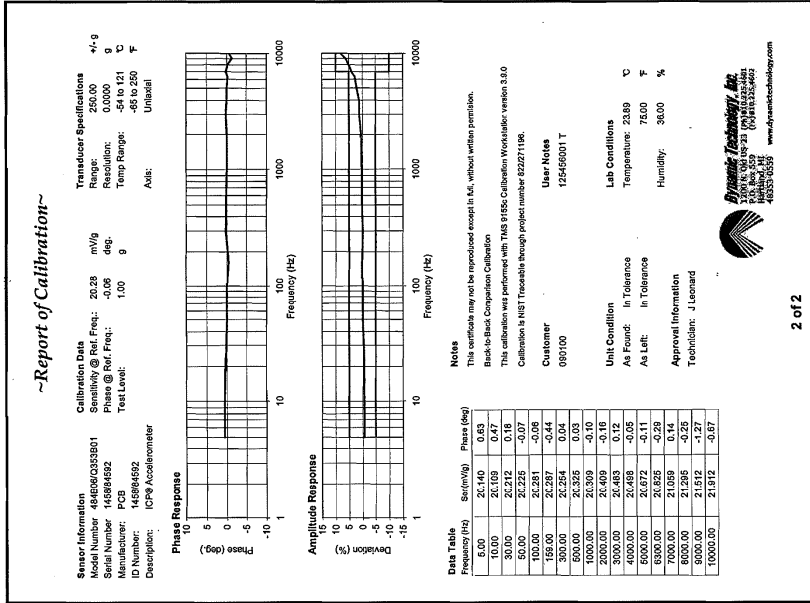

The above identified unit was calibrated in our laboratory at the address shown below.  
 This report applies only to the item(s) identified above and shall not be reproduced, except in full, without the written approval of Dynamic Technology, Inc. This unit has been calibrated utilizing standards with a Test Uncertainty Ratio (TUR) of power three (3) to five (5) in conditions that will average three (3) to five (5) units above stated above. This calibration was performed using metrological standards in full compliance with ANSI/ISO/IEC 17025, 17020, 17021, 17022, 17023, 17025, 17026, 17027, 17028, 17029, 17030, 17031, 17032, 17033, 17034, 17035, 17036, 17037, 17038, 17039, 17040, 17041, 17042, 17043, 17044, 17045, 17046, 17047, 17048, 17049, 17050, 17051, 17052, 17053, 17054, 17055, 17056, 17057, 17058, 17059, 17060, 17061, 17062, 17063, 17064, 17065, 17066, 17067, 17068, 17069, 17070, 17071, 17072, 17073, 17074, 17075, 17076, 17077, 17078, 17079, 17080, 17081, 17082, 17083, 17084, 17085, 17086, 17087, 17088, 17089, 17090, 17091, 17092, 17093, 17094, 17095, 17096, 17097, 17098, 17099, 17100, 17101, 17102, 17103, 17104, 17105, 17106, 17107, 17108, 17109, 17110, 17111, 17112, 17113, 17114, 17115, 17116, 17117, 17118, 17119, 17120, 17121, 17122, 17123, 17124, 17125, 17126, 17127, 17128, 17129, 17130, 17131, 17132, 17133, 17134, 17135, 17136, 17137, 17138, 17139, 17140, 17141, 17142, 17143, 17144, 17145, 17146, 17147, 17148, 17149, 17150, 17151, 17152, 17153, 17154, 17155, 17156, 17157, 17158, 17159, 17160, 17161, 17162, 17163, 17164, 17165, 17166, 17167, 17168, 17169, 17170, 17171, 17172, 17173, 17174, 17175, 17176, 17177, 17178, 17179, 17180, 17181, 17182, 17183, 17184, 17185, 17186, 17187, 17188, 17189, 17190, 17191, 17192, 17193, 17194, 17195, 17196, 17197, 17198, 17199, 17200, 17201, 17202, 17203, 17204, 17205, 17206, 17207, 17208, 17209, 17210, 17211, 17212, 17213, 17214, 17215, 17216, 17217, 17218, 17219, 17220, 17221, 17222, 17223, 17224, 17225, 17226, 17227, 17228, 17229, 17230, 17231, 17232, 17233, 17234, 17235, 17236, 17237, 17238, 17239, 17240, 17241, 17242, 17243, 17244, 17245, 17246, 17247, 17248, 17249, 17250, 17251, 17252, 17253, 17254, 17255, 17256, 17257, 17258, 17259, 17260, 17261, 17262, 17263, 17264, 17265, 17266, 17267, 17268, 17269, 17270, 17271, 17272, 17273, 17274, 17275, 17276, 17277, 17278, 17279, 17280, 17281, 17282, 17283, 17284, 17285, 17286, 17287, 17288, 17289, 17290, 17291, 17292, 17293, 17294, 17295, 17296, 17297, 17298, 17299, 17300, 17301, 17302, 17303, 17304, 17305, 17306, 17307, 17308, 17309, 17310, 17311, 17312, 17313, 17314, 17315, 17316, 17317, 17318, 17319, 17320, 17321, 17322, 17323, 17324, 17325, 17326, 17327, 17328, 17329, 17330, 17331, 17332, 17333, 17334, 17335, 17336, 17337, 17338, 17339, 17340, 17341, 17342, 17343, 17344, 17345, 17346, 17347, 17348, 17349, 17350, 17351, 17352, 17353, 17354, 17355, 17356, 17357, 17358, 17359, 17360, 17361, 17362, 17363, 17364, 17365, 17366, 17367, 17368, 17369, 17370, 17371, 17372, 17373, 17374, 17375, 17376, 17377, 17378, 17379, 17380, 17381, 17382, 17383, 17384, 17385, 17386, 17387, 17388, 17389, 17390, 17391, 17392, 17393, 17394, 17395, 17396, 17397, 17398, 17399, 17400, 17401, 17402, 17403, 17404, 17405, 17406, 17407, 17408, 17409, 17410, 17411, 17412, 17413, 17414, 17415, 17416, 17417, 17418, 17419, 17420, 17421, 17422, 17423, 17424, 17425, 17426, 17427, 17428, 17429, 17430, 17431, 17432, 17433, 17434, 17435, 17436, 17437, 17438, 17439, 17440, 17441, 17442, 17443, 17444, 17445, 17446, 17447, 17448, 17449, 17450, 17451, 17452, 17453, 17454, 17455, 17456, 17457, 17458, 17459, 17460, 17461, 17462, 17463, 17464, 17465, 17466, 17467, 17468, 17469, 17470, 17471, 17472, 17473, 17474, 17475, 17476, 17477, 17478, 17479, 17480, 17481, 17482, 17483, 17484, 17485, 17486, 17487, 17488, 17489, 17490, 17491, 17492, 17493, 17494, 17495, 17496, 17497, 17498, 17499, 17500, 17501, 17502, 17503, 17504, 17505, 17506, 17507, 17508, 17509, 17510, 17511, 17512, 17513, 17514, 17515, 17516, 17517, 17518, 17519, 17520, 17521, 17522, 17523, 17524, 17525, 17526, 17527, 17528, 17529, 17530, 17531, 17532, 17533, 17534, 17535, 17536, 17537, 17538, 17539, 17540, 17541, 17542, 17543, 17544, 17545, 17546, 17547, 17548, 17549, 17550, 17551, 17552, 17553, 17554, 17555, 17556, 17557, 17558, 17559, 17560, 17561, 17562, 17563, 17564, 17565, 17566, 17567, 17568, 17569, 17570, 17571, 17572, 17573, 17574, 17575, 17576, 17577, 17578, 17579, 17580, 17581, 17582, 17583, 17584, 17585, 17586, 17587, 17588, 17589, 17590, 17591, 17592, 17593, 17594, 17595, 17596, 17597, 17598, 17599, 17600, 17601, 17602, 17603, 17604, 17605, 17606, 17607, 17608, 17609, 17610, 17611, 17612, 17613, 17614, 17615, 17616, 17617, 17618, 17619, 17620, 17621, 17622, 17623, 17624, 17625, 17626, 17627, 17628, 17629, 17630, 17631, 17632, 17633, 17634, 17635, 17636, 17637, 17638, 17639, 17640, 17641, 17642, 17643, 17644, 17645, 17646, 17647, 17648, 17649, 17650, 17651, 17652, 17653, 17654, 17655, 17656, 17657, 17658, 17659, 17660, 17661, 17662, 17663, 17664, 17665, 17666, 17667, 17668, 17669, 17670, 17671, 17672, 17673, 17674, 17675, 17676, 17677, 17678, 17679, 17680, 17681, 17682, 17683, 17684, 17685, 17686, 17687, 17688, 17689, 17690, 17691, 17692, 17693, 17694, 17695, 17696, 17697, 17698, 17699, 17700, 17701, 17702, 17703, 17704, 17705, 17706, 17707, 17708, 17709, 17710, 17711, 17712, 17713, 17714, 17715, 17716, 17717, 17718, 17719, 17720, 17721, 17722, 17723, 17724, 17725, 17726, 17727, 17728, 17729, 17730, 17731, 17732, 17733, 17734, 17735, 17736, 17737, 17738, 17739, 17740, 17741, 17742, 17743, 17744, 17745, 17746, 17747, 17748, 17749, 17750, 17751, 17752, 17753, 17754, 17755, 17756, 17757, 17758, 17759, 17760, 17761, 17762, 17763, 17764, 17765, 17766, 17767, 17768, 17769, 17770, 17771, 17772, 17773, 17774, 17775, 17776, 17777, 17778, 17779, 17780, 17781, 17782, 17783, 17784, 17785, 17786, 17787, 17788, 17789, 17790, 17791, 17792, 17793, 17794, 17795, 17796, 17797, 17798, 17799, 17800, 17801, 17802, 17803, 17804, 17805, 17806, 17807, 17808, 17809, 17810, 17811, 17812, 17813, 17814, 17815, 17816, 17817, 17818, 17819, 17820, 17821, 17822, 17823, 17824, 17825, 17826, 17827, 17828, 17829, 17830, 17831, 17832, 17833, 17834, 17835, 17836, 17837, 17838, 17839, 17840, 17841, 17842, 17843, 17844, 17845, 17846, 17847, 17848, 17849, 17850, 17851, 17852, 17853, 17854, 17855, 17856, 17857, 17858, 17859, 17860, 17861, 17862, 17863, 17864, 17865, 17866, 17867, 17868, 17869, 17870, 17871, 17872, 17873, 17874, 17875, 17876, 17877, 17878, 17879, 17880, 17881, 17882, 17883, 17884, 17885, 17886, 17887, 17888, 17889, 17890, 17891, 17892, 17893, 17894, 17895, 17896, 17897, 17898, 17899, 17900, 17901, 17902, 17903, 17904, 17905, 17906, 17907, 17908, 17909, 17910, 17911, 17912, 17913, 17914, 17915, 17916, 17917, 17918, 17919, 17920, 17921, 17922, 17923, 17924, 17925, 17926, 17927, 17928, 17929, 17930, 17931, 17932, 17933, 17934, 17935, 17936, 17937, 17938, 17939, 17940, 17941, 17942, 17943, 17944, 17945, 17946, 17947, 17948, 17949, 17950, 17951, 17952, 17953, 17954, 17955, 17956, 17957, 17958, 17959, 17960, 17961, 17962, 17963, 17964, 17965, 17966, 17967, 17968, 17969, 17970, 17971, 17972, 17973, 17974, 17975, 17976, 17977, 17978, 17979, 17980, 17981, 17982, 17983, 17984, 17985, 17986, 17987, 17988, 17989, 17990, 17991, 17992, 17993, 17994, 17995, 17996, 17997, 17998, 17999, 18000, 18001, 18002, 18003, 18004, 18005, 18006, 18007, 18008, 18009, 18010, 18011, 18012, 18013, 18014, 18015, 18016, 18017, 18018, 18019, 18020, 18021, 18022, 18023, 18024, 18025, 18026, 18027, 18028, 18029, 18030, 18031, 18032, 18033, 18034, 18035, 18036, 18037, 18038, 18039, 18040, 18041, 18042, 18043, 18044, 18045, 18046, 18047, 18048, 18049, 18050, 18051, 18052, 18053, 18054, 18055, 18056, 18057, 18058, 18059, 18060, 18061, 18062, 18063, 18064, 18065, 18066, 18067, 18068, 18069, 18070, 18071, 18072, 18073, 18074, 18075, 18076, 18077, 18078, 18079, 18080, 18081, 18082, 18083, 18084, 18085, 18086, 18087, 18088, 18089, 18090, 18091, 18092, 18093, 18094, 18095, 18096, 18097, 18098, 18099, 18100, 18101, 18102, 18103, 18104, 18105, 18106, 18107, 18108, 18109, 18110, 18111, 18112, 18113, 18114, 18115, 18116, 18117, 18118, 18119, 18120, 18121, 18122, 18123, 18124, 18125, 18126, 18127, 18128, 18129, 18130, 18131, 18132, 18133, 18134, 18135, 18136, 18137, 18138, 18139, 18140, 18141, 18142, 18143, 18144, 18145, 18146, 18147, 18148, 18149, 18150, 18151, 18152, 18153, 18154, 18155, 18156, 18157, 18158, 18159, 18160, 18161, 18162, 18163, 18164, 18165, 18166, 18167, 18168, 18169, 18170, 18171, 18172, 18173, 18174, 18175, 18176, 18177, 18178, 18179, 18180, 18181, 18182, 18183, 18184, 18185, 18186, 18187, 18188, 18189, 18190, 18191, 18192, 18193, 18194, 18195, 18196, 18197, 18198, 18199, 18200, 18201, 18202, 18203, 18204, 18205, 18206, 18207, 18208, 18209, 18210, 18211, 18212, 18213, 18214, 18215, 18216, 18217, 18218, 18219, 18220, 18221, 18222, 18223, 18224, 18225, 18226, 18227, 18228, 18229, 18230, 18231, 18232, 18233, 18234, 18235, 18236, 18237, 18238, 18239, 18240, 18241, 18242, 18243, 18244, 18245, 18246, 18247, 18248, 18249, 18250, 18251, 18252, 18253, 18254, 18255, 18256, 18257, 18258, 18259, 18260, 18261, 18262, 18263, 18264, 18265, 18266, 18267, 18268, 18269, 18270, 18271, 18272, 18273, 18274, 18275, 18276, 18277, 18278, 18279, 18280, 18281, 18282, 18283, 18284, 18285, 18286, 18287, 18288, 18289, 18290, 18291, 18292, 18293, 18294, 18295, 18296, 18297, 18298, 18299, 18300, 18301, 18302, 18303, 18304, 18305, 18306, 18307, 18308, 18309, 18310, 18311, 18312, 18313, 18314, 18315, 18316, 18317, 18318,

