


REPORT NUMBER 114-GTL-09-004

# SAFETY COMPLIANCE TESTING FOR FMVSS NO. 114 THEFT PROTECTION

HYUNDAI MOTOR COMPANY  
2009 HYUNDAI GENESIS, PASSENGER CAR  
NHTSA NO. C90501

GENERAL TESTING LABORATORIES, INC.  
1623 LEEDSTOWN ROAD  
COLONIAL BEACH, VIRGINIA 22443

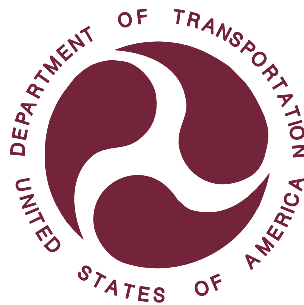

JULY 7, 2009

FINAL REPORT

PREPARED FOR

U. S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
ENFORCEMENT  
OFFICE OF VEHICLE SAFETY COMPLIANCE  
1200 NEW JERSEY AVE., SE  
WASHINGTON, D.C. 20590

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: \_\_\_\_\_

Approved By: \_\_\_\_\_

Approval Date: 07/07/09

**FINAL REPORT ACCEPTANCE BY OVSC:**

Accepted By: 

Acceptance Date: 07/07/09

1. Report No. 114-GTL-09-004	2. Government Accession No. N/A	3. Recipient's Catalog No. N/A
4. Title and Subtitle Final Report of FMVSS 114 Compliance Testing of a 2009 HYUNDAI GENESIS PASSENGER CAR NHTSA No. C90501		5. Report Date July 7, 2009
		6. Performing Organ. Code GTL
7. Author(s) Grant Farrand, Project Engineer Debbie Messick, Project Manager		8. Performing Organ. Rep# GTL-DOT-09-114-004
9. Performing Organization Name and Address General Testing Laboratories, Inc. 1623 Leedstown Road Colonial Beach, Va 22443		10. Work Unit No. (TRAIS) N/A
		11. Contract or Grant No. DTNH22-06-C-00032
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Admin. Enforcement Office of Vehicle Safety Compliance (NVS-220) 1200 New Jersey Ave., S.E., Washington, DC 20590		13. Type of Report and Period Covered Final Test Report April 8, 2009
		14. Sponsoring Agency Code NVS-221
15. Supplementary Notes		
16. Abstract Compliance tests were conducted on the subject 2009 Hyundai Genesis 4-door passenger car in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-114-03-Draft-GTL-REVC for the determination of FMVSS 114 compliance.  Test failures identified were as follows: None		
17. Key Words Compliance Testing Safety Engineering FMVSS 114		18. Distribution Statement Copies of this report are available from NHTSA Technical Information Services (TIS) Room W45-212 (NPO-411) 1200 New Jersey Ave., S.E. Washington, DC 20590 Telephone No. (202) 366-4947
19. Security Classif. (of this report) UNCLASSIFIED	21. No. of Pages 27	22. Price
20. Security Classif. (of this page) UNCLASSIFIED		

## TABLE OF CONTENTS

SECTION	PAGE
1. Purpose of Compliance Test	1
2. Test Procedure and Summary of Results	2
3. Test Data	3
4. Test Equipment List	13
5. Photographs	14
5.1 ¾ Frontal View from Left Side of Vehicle	
5.2 Vehicle Certification Label	
5.3 Vehicle Tire Information Label	
5.4 Close-up View of Electronic Key	
5.5 Electronic Key Receptacle in Dash	
5.6 Starting System Control	
5.7 Transmission Gear Selection Control	
5.8 Device which allows moving Gear Selector Out of the "Park" Position	
5.9 "No Key" Warning	

## SECTION 1

## PURPOSE OF COMPLIANCE TEST

1.0 PURPOSE OF TEST

A model year 2009 Hyundai Genesis passenger car was subjected to Federal Motor Vehicle Safety Standard (FMVSS) No. 114 testing to determine if the vehicle was in compliance with the requirements of the standard. FMVSS 114 specifies requirements to decrease the likelihood that a vehicle is stolen, or accidentally set in motion.

1.1 The test vehicle was a 2009 Hyundai Genesis Passenger Car. The vehicle was identified as follows:

A. Vehicle Identification Number: KMHGC46E89U025598

B. NHTSA No.: C90501

C. Manufacturer: HYUNDAI MOTOR COMPANY

D. Manufacture Date: JUN/20/08

E. Color: Silver

1.2 TEST DATE

The test vehicle was subjected to FMVSS No. 114 testing on April 8, 2009.

## SECTION 2

### TEST PROCEDURE AND SUMMARY OF RESULTS

#### 2.0 TEST PROCEDURE

All tests were conducted in accordance with NHTSA, Office of Vehicle Safety Compliance (OVSC) Laboratory Procedure TP-114-03-Draft-GTL-REVC and General Testing Laboratories, Inc. (GTL) Test Procedure, TP-114-03-Draft, "Theft Protection and Rollaway Prevention".

#### 2.1 SUMMARY OF RESULTS

Test data indicate the FMVSS 114 requirements appear to have been satisfied. All test data resulting from the tests were recorded on test data sheets in Section 3.

## SECTION 3

## TEST DATA

3.0 TEST RESULTS

The following data sheets document the results of FMVSS 114 testing on the 2009 Hyundai Genesis.

FMVSS 114, THEFT PROTECTION  
DATA SHEET 1 – VEHICLE IDENTIFICATION

TEST DATE: 04/08/09 LAB.: General Testing Laboratories  
 CONTRACT: DTNH22-06-C-00032 VEH. NHTSA NO.: C90501  
 VIN: KMHGC46E89U025598 BUILD DATE: JUN/20/08

MY/MAKE/MODEL/BODY STYLE: 2009 Hyundai Genesis

TRANSMISSION TYPE:  
 Automatic X; Manual   ; Other    (describe: 6 speed automatic)

DRIVE TRAIN TYPE:  
 Front Wheel   ; Rear Wheel X; 4-Wheel

FUEL TANK LEVEL: 100 (% OF max.) MILEAGE: 268

VEHICLE STARTING SYSTEM:

Location of the starting system:  
On Dash to the Right Side of Steering Column

Selectable settings:  
Off, Accessory, On/Run, Start

Explain how the system is activated:  
The operator must push the engine start/stop button to enable an ID verification process that allows the electronic code to be inserted into the starting system if detected.

KEY

Description of the key:  
Electronic proximity key

STARTING SYSTEM ACTIVATION

Describe how the key is inserted into the starting system:  
The electronic key is inserted into the starting system when (1) The key device is inside the vehicle and (2) The operator pushes the start/stop button.

Describe how the key is used to activate the starting system:  
The act of pushing the start/stop button enables an ID verification process that allows the code to be inserted into the starting system.

Describe how the key is removed from the starting system:  
The electronic key is removed from the starting system when (1)The transmission is in "park" position, (2) The engine is shut off, and (3) a door is opened (in that order)



FMVSS 114, THEFT PROTECTION  
DATA SHEET 1 continued

GEAR SELECTION CONTROL

Describe the gear selection control:

Moveable shift lever located on center console between front seats.

Describe how the gear selection control is activated:

Brake pedal must be depressed and engine must be running to move gear selector out of park.

Describe all of the selectable settings:

Park, Reverse, Neutral, Drive (driver position has +/-)

IMMOBILIZER

Is the vehicle equipped with an immobilizer    YES X                    NO \_\_\_\_\_

Describe the immobilizer device and how it prevents vehicle theft (if equipped):

Vehicle engine will not start and steering cannot be unlocked without key

OPTIONAL RELEASE DEVICES

Describe if the vehicle is equipped with optional release devices:

Yes, Release for Shifter

OPTIONAL RELEASE DEVICES:

Key Removal \_\_\_\_\_ Gear Selection Control X                    None \_\_\_\_\_                    Other \_\_\_\_\_

VEHICLE FLUIDS

Check all vehicle fluids and adjust to the proper levels for operation: Full

VEHICLE TIRE PLACARD INFORMATION

Vehicle Mfg. Recommended Tire Inflation Pressure

(kPa): Front 230                    Rear 230

TIRE INFLATION PRESSURES:

Measured (kPa): LF 230                    LR 230                    RF 230                    RR 230

WEIGHT

Vehicle Curb Weight(kg): 1695    Weight of Driver (kg): 90    (target = 91kg)

FMVSS 114, THEFT PROTECTION  
DATA SHEET 2

VEH. NHTSA NO.:           C90501          

TEST DATE:           04/08/09          

REQUIREMENT S5.1.1	PASS	FAIL
Engine cannot be started without using the key <u>  X  </u> Yes <u>      </u> No	X	
<p>With key removed, steering wheel locks: Yes: <u>  X  </u> No: <u>      </u></p> <p>Identify locking position(s) on wheel using arrow(s)</p> <p>Clockwise: <u>      25      </u> (degrees) Counterclockwise: <u>      12      </u> (degrees)</p> <div data-bbox="1149 533 1468 856" style="text-align: center;"> </div>		
<p>Key removal prevents forward self-mobility: Yes: <u>  X  </u> No: <u>      </u></p> <p>If yes describe: Engine will not start, steering wheel is locked and gear selector is locked in park.</p>		
When key is removed from the starting system, starting of the engine or motor and either steering or self mobility is prevented. YES	X	

REMARKS: If key device is removed from vehicle while engine is running, steering and driving are unaffected until the first time the engine is turned off, at which time the engine cannot be re-started and steering locks.

FMVSS 114, THEFT PROTECTION  
DATA SHEET 2 continued

REQUIREMENT S5.1.3	PASS	FAIL
<p>An audible warning is activated whenever the key is in any starting system position with the exception of "on" and "start" and the door closest to the driver's designated seating position is opened.</p> <p style="text-align: right;">Yes <u>  X  </u> No <u>      </u></p> <p>Identify ALL key/starting system position setting: <u>Off, Accessory, On/Run, Start</u></p>	X	

REQUIREMENT S5.1.4	PASS	FAIL
<p>With the vehicle engine or motor shut down and the transmission gear selection control in any position other than "park";</p> <p>The steering wheel can rotate without locking? Yes <u>  X  </u> No <u>      </u></p>	X	
<p>The vehicle is free to roll forward? Yes <u>  X  </u> No <u>      </u></p>	X	

REMARKS:

RECORDED BY:   G. Farrand  

DATE:   04/08/09  

APPROVED BY:   D. Messick

FMVSS 114, ROLLAWAY PREVENTION  
DATA SHEET 3  
(for vehicles equipped with transmission with a "park" position)

VEH. NHTSA NO.:           C90501          

TEST DATE:           04/08/09          

REQUIREMENT S5.2.1	PASS	FAIL
<p>The starting system prevents key removal in ALL gear selection control positions except "park".  <span style="margin-left: 150px;">Yes <u>  X  </u> No <u>      </u></span></p> <p>Can the gear selection control be placed between each gear selection position and will it remain there without assistance?  <span style="margin-left: 150px;">Yes <u>  X  </u> No <u>      </u></span></p> <p>If yes, can the key be removed from the starting system?  <span style="margin-left: 150px;">Yes <u>      </u> No <u>  X  </u></span></p> <p>If the key can be removed from the vehicle starting system when the gear selection control is not locked in "park", a mechanism shall exist which, upon key removal, the vehicle transmission or gear selection control shall become locked in "park" as the direct result of removing the key. If such a mechanism exists, describe the mechanism and its function:</p>	<b>X</b>	

REQUIREMENT S5.2.2	PASS	FAIL
<p>The gear selection control is locked in the "park" position when the key is removed from the starting system.  <span style="margin-left: 150px;">Yes <u>  X  </u> No <u>      </u></span></p>	<b>X</b>	

REMARKS:

DATA SHEET 3 continued

REQUIREMENT S5.2.3	PASS	FAIL
<p><u>ELECTRICAL FAILURE (Battery Discharge)</u></p> <p>In the event of an electrical failure, key removal from the starting system when the transmission or gear selection control is not locked in “park” is permitted”. Yes <u>X</u> No _____</p> <p>The vehicle is equipped with an override device that permits key removal from the starting system when the transmission or gear selection control is not locked in “park”. Yes _____ No <u>X</u></p> <p>If yes, select the type of override device equipped: Opaque Cover _____ No Cover _____</p> <p>Describe the override device design and mode of activation (if equipped):</p>	X	
	X	
	N/A	
<p><b>FILL IN THE SECTION BELOW THAT APPLIES:</b></p> <p><u>OVERRIDE WITH AN OPAQUE COVER:</u></p> <p>The opaque surface cover prevents sight of and use of override device. Yes _____ No _____</p> <p>The opaque surface cover can only be removed by using a screwdriver or other tool. Yes _____ No _____</p> <p>As a direct result of removing the key from starting system, the following is prevented:      Steering _____ or Self-Mobility _____</p> <p><u>OVERRIDE WITH NO COVER</u></p> <p>The override device requires the use of a tool to activate. Yes _____ No _____</p> <p>Simultaneous activation of the override device and removal of key from starting system is required. Yes _____ No _____</p> <p>As a direct result of removing the key from the starting system, the following is prevented:      Steering _____ or Self-Mobility _____</p>	N/A	

REMARKS:

DATA SHEET 3 continued

REQUIREMENT S5.2.4	PASS	FAIL
<p><b><u>GEAR SELECTION CONTROL OVERRIDE DEVICE</u></b></p> <p>The vehicle is equipped with an override device that allows the user to move the gear selection control from “park” after the key has been removed from the starting system. Yes <u> X </u> No _____</p> <p>If yes, select the type of override device that is equipped: Override operated with a: Key _____ Opaque Cover <u> X </u> No Cover _____</p> <p>Describe the override device design and mode of activation (if equipped): Remove cover with key or small screwdriver and push down with key or screwdriver to release shifter from park position.</p> <p><b>FILL IN THE SECTION BELOW THAT APPLIES:</b></p> <p><b><u>OVERVERRIDE OPERATED WITH KEY:</u></b></p> <p>The key is required to operate the override device that allows the user to move the gear selection control from “park” after the key has been removed from the starting system. Yes _____ No _____</p> <p><b><u>OVERVERRIDE WITH AN OPAQUE COVER</u></b></p> <p>The opaque surface cover prevents sight of and use of override device. Yes <u> X </u> No _____</p> <p>The opaque surface cover can only be removed by using a screwdriver or other tool. Yes <u> X </u> No _____</p> <p>As a direct result of removing the key from the starting system, the following is prevented: Steering <u> X </u> or Self-Mobility _____</p> <p><b><u>OVERVERRIDE WITH NO COVER</u></b></p> <p>The override device requires the use of a tool to operate. Yes _____ No _____</p> <p>Simultaneous activation of the override device and removal of key from starting system is required. Yes _____ No _____</p> <p>As a direct result of removing the key from the starting system, the following is prevented: Steering _____ or Self-Mobility _____</p>	<p>X</p> <p>N/A</p> <p>X</p> <p>N/A</p>	

REMARKS:



## DATA SHEET 3 continued

REQUIREMENTS S5.3	PASS	FAIL
<u>VEHICLE FACING UPHILL ON 10% GRADE</u>		
With the key in the "off" position, the transmission will shift out of "park" without the service brake being applied. Yes _____ No <u>X</u>	<u>X</u>	
With the key in the "acc" position, the transmission will shift out of "park" without the service brake being applied. Yes _____ No <u>X</u>	<u>X</u>	
With the key in the "on" position (engine off), the transmission will shift out of "park" without the service brake being applied. Yes _____ No <u>X</u>	<u>X</u>	
With the key in the "start" position, the transmission will shift out of "park" without the service brake being applied. Yes _____ No <u>X</u>	<u>X</u>	
With the key in the "other" position (please specify), the transmission will shift out of "park" without the service brake being applied. Yes _____ No _____	<u>N/A*</u>	
Does the key stay between starting system positions without being held by operator? Yes _____ No <u>X</u>	<u>X</u>	
If so, please describe.		
Brake force readings (force required to allow the transmission to shift out of "park"):		
The vehicle is equipped with adjustable pedals: Yes _____ No <u>X</u>		
Fore Position:	Aft Position (if applicable)	
Reading 1 <u>25.8 N</u>	Reading 1 _____	
Reading 2 <u>24.0 N</u>	Reading 2 _____	
Reading 3 <u>23.1 N</u>	Reading 3 _____	
Reading 4 <u>23.1 N</u>	Reading 4 _____	
Reading 5 <u>23.6 N</u>	Reading 5 _____	
Avg. <u>23.9 N</u>	Avg. _____	
	<u>X</u>	

REMARKS: \*MANUAL TRANSMISSION

RECORDED BY: G. Farrand  
APPROVED BY: D. MessickDATE: 04/08/09



SECTION 4  
TEST EQUIPMENT LIST

ITEM	MFR	MODEL	S/N	CAL. PERIOD	DATE OF NEXT CALIB.	REMARKS
SLR DIGITAL CAMERA	NIKON	D50	N/A	N/A	N/A	
TIRE PRESSURE GAUGE	WESKLER	45-0/100	107	12 MO.	03/10	
INCLINOMETER	MITUTOYO	PRO 360	950-315	N/A	BEFORE USE	
STEEL TAPE	STANLEY	FAT MAX	33-890	12 MO.	03/10	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	04/10	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	04/10	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	04/10	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	04/10	
SPRING SCALE	CHATILLON	DPP-10	4729	12 MO.	04/10	


SECTION 5  
PHOTOGRAPHS



2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS NO. 114

FIGURE 5.1  
3/4 FRONTAL VIEW FROM LEFT SIDE OF VEHICLE



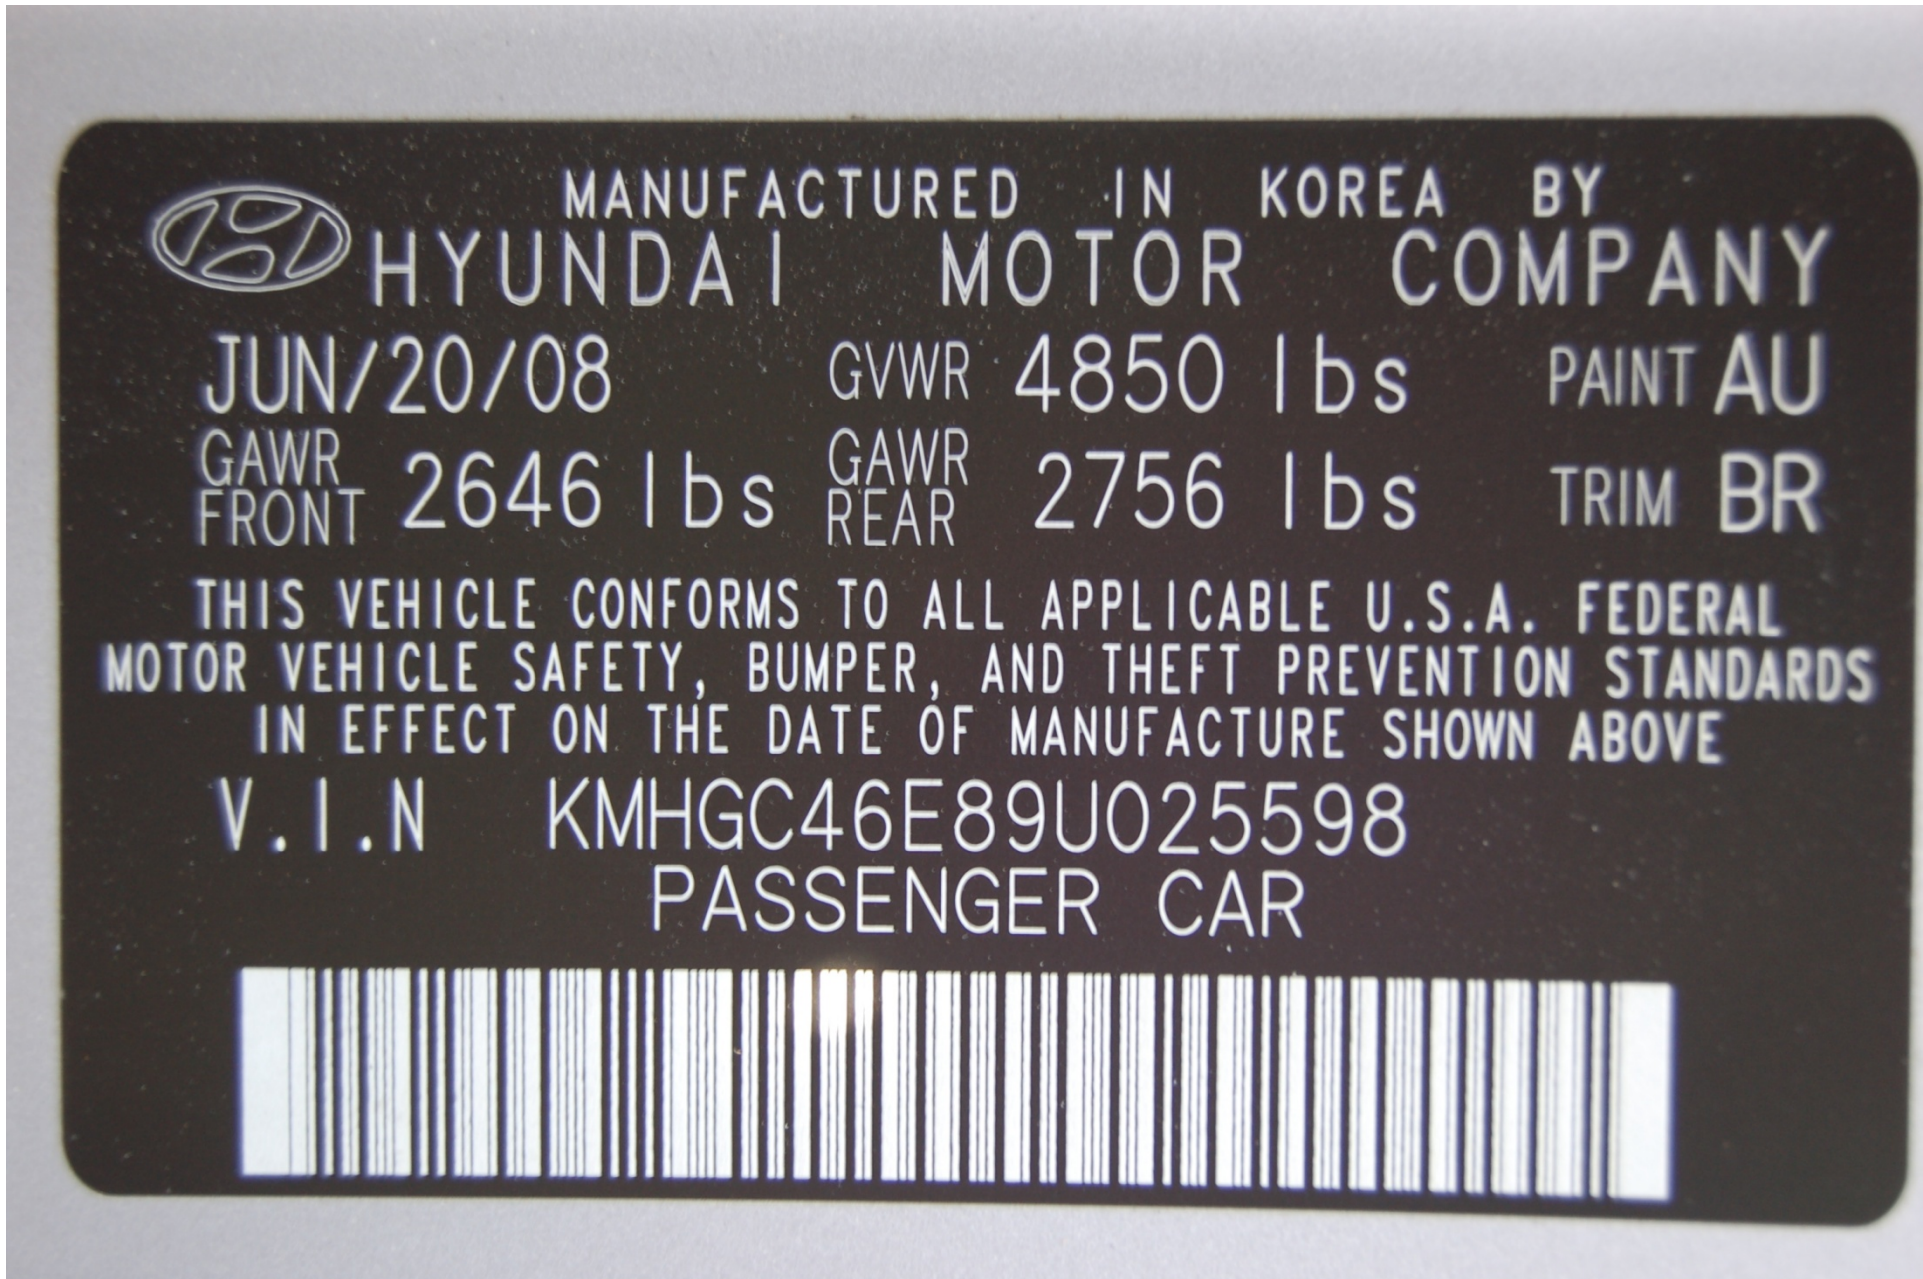


2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS NO. 114

FIGURE 5.2  
VEHICLE CERTIFICATION LABEL



B02



## TIRE AND LOADING INFORMATION

## RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

SEATING CAPACITY	TOTAL 5	FRONT 2	REAR 3
NOMBRE DE SIÈGES	TOTAL 5	AVANT 2	ARRIÈRE 3

The combined weight of occupants and cargo should never exceed 390kg or 860lbs.  
Le poids total des occupants et des marchandises ne doit jamais dépasser 390kg ou 860lb.

TIRE / PNEU	SIZE / DIMENSIONS	COLD TIRE PRESSURE / PRESSION DES PNEUS À FROID	
FRONT / AVANT	P225/55R17	230kPa , 33psi	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p style="margin: 0;"><b>SEE OWNER'S</b></p> <p style="margin: 0;"><b>MANUAL FOR</b></p> <p style="margin: 0;"><b>ADDITIONAL</b></p> <p style="margin: 0;"><b>INFORMATION</b></p> </div> <div style="width: 45%;"> <p style="margin: 0;"><b>VOIR LE</b></p> <p style="margin: 0;"><b>MANUEL DE</b></p> <p style="margin: 0;"><b>L'USAGER POUR</b></p> <p style="margin: 0;"><b>PLUS DE</b></p> <p style="margin: 0;"><b>RENSEIGNEMENTS</b></p> </div> </div>
REAR / ARRIERE	P225/55R17	230kPa , 33psi	
SPARE / DE RECHANGE	T135/90D17	420kPa , 60psi	

FIGURE 5.3  
VEHICLE TIRE INFORMATION LABEL





2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS NO. 114

FIGURE 5.4  
CLOSE-UP VIEW OF ELECTRONIC KEY





2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS NO. 114

FIGURE 5.5  
ELECTRONIC KEY RECEPTACLE IN DASH





2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS NO. 114

FIGURE 5.6  
STARTING SYSTEM CONTROL





2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS 114

FIGURE 5.7  
TRANSMISSION GEAR SELECTION CONTROL





2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS NO. 114

FIGURE 5.8  
DEVICE WHICH ALLOWS MOVING GEAR SELECTOR OUT OF  
"PARK" POSITION





2009 HYUNDAI GENESIS  
NHTSA NO. C90501  
FMVSS NO. 114

FIGURE 5.9  
"NO KEY" WARNING