

**SAFETY COMPLIANCE TESTING FOR FMVSS 201
Occupant Protection In Interior Impact
Upper Interior Head Impact Protection**

**JAGUAR CARS LTD.
2009 Jaguar XF
NHTSA No. C90205**

**MGA RESEARCH CORPORATION
446 Executive Drive
Troy, Michigan 48083**




Test Dates: May 7-8, 2009
Report Date: May 11, 2009

FINAL REPORT


PREPARED FOR:

**U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
1200 New Jersey Avenue, SE
West Building
WASHINGTON, D.C. 20590**


This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: 

Donald J. Whiteside, Project Engineer



Helen A. Kaleto, Project Manager

Approved By: 

Approval Date: May 11, 2009

FINAL REPORT ACCEPTANCE BY OVSC:

Accepted By: _____

Acceptance Date: _____

TECHNICAL REPORT STANDARD TITLE PAGE

1. Report No. 201UI-MGA-09-04		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 201 Compliance Testing of a 2009 Jaguar XF, NHTSA No. C90205				5. Report Date May 11, 2009	
				6. Performing Organization Code MGA	
7. Author(s) Helen A. Kaleto, Project Manager Donald J. Whiteside, Project Engineer				8. Performing Organization Report No. 201UI-MGA-09-04	
9. Performing Organization Name and Address MGA Research Corporation 446 Executive Drive Troy, Michigan 48083				10. Work Unit No.	
				11. Contract or Grant No. DTNH22-04-C-11027	
12. Sponsoring Agency Name and Address U.S. Department Of Transportation National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance 1200 New Jersey Avenue, SE West Building, 4 th Floor Washington, D.C. 20590				13. Type of Report and Period Covered Final Test Report	
				14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes					
16. Abstract A compliance test series was conducted on the subject 2009 Jaguar XF, NHTSA No. C90205, in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-201U-01 for the determination of FMVSS 201 compliance. The testing was conducted at MGA Research Corporation in Troy, Michigan on May 7-8, 2009. Test failures identified were as follows: None The data recorded indicates that the 2009 Jaguar XF, tested appears to comply with the upper interior requirements of FMVSS 201.					
17. Key Words Compliance Testing Safety Engineering FMVSS 201UI 2009 Jaguar XF				18. Distribution Statement Copies of this report are available from: NHTSA Technical Reference Division, Mail Code: NPO-410 1200 New Jersey Avenue, SE West Building Washington, D.C. 20590	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 166	22. Price N/A

TABLE OF CONTENTS

<u>SECTION</u>	<u>DESCRIPTION</u>	<u>PAGE NO.</u>
1.0	PURPOSE OF COMPLIANCE TEST	6
2.0	COMPLIANCE TEST DATA SUMMARY	7
3.0	TEST DATA (Including Acceleration and Velocity Plots)	23
4.0	TEST EQUIPMENT LIST AND CALIBRATION INFORMATION	119
	4.1 Pre-Test Calibration FMH #35	
	4.2 Post-Test Calibration FMH #35	
	4.3 Pre-Test Calibration FMH #37	
	4.4 Post-Test Calibration FMH #37	
	4.5 Pre-Test Calibration FMH #38	
	4.6 Post-Test Calibration FMH #38	
5.0	PHOTOGRAPHS	139
	Appendix A - Temperature Trace	148
	Appendix B - Calibration Certificates	149

LIST OF TABLES

<u>TABLE</u>	<u>DESCRIPTION</u>	<u>PAGE NO.</u>
2-1	SUMMARY TABLE OF TEST RESULTS	8
2-2	GENERAL TEST AND VEHICLE PARAMETER DATA	10
2-3	HORIZONTAL IMPACT ANGLE RANGE FOR A- AND B-PILLARS	14
2-4	VERTICAL IMPACT ANGLE RANGES	15
2-5	TARGET MEASUREMENTS	17
2-6	SUMMARY OF TARGETING RESULTS	20
4-1	LIST OF ITEMS USED	119
4-2	FMH CALIBRATION SUMMARY	120

1.0 PURPOSE OF COMPLIANCE TEST

The purpose of this head impact compliance test was to determine whether the subject vehicle, a 2009 Jaguar XF, meets the performance requirements of FMVSS 201, Occupant Protection in Interior Impact - Upper Interior Head Impact Protection.

Tests were conducted on May 7-8, 2009 on a 2009 Jaguar XF, manufactured by Jaguar Cars, Ltd. of Coventry England.

All tests were conducted in accordance with the U. S. Department of Transportation, National Highway Traffic Safety Administration's Laboratory Test Procedure TP-201U-01 dated April 3, 1998 and the corresponding MGA Research Corporation's FMVSS 201U procedure number MGATP201U_FRAME#2 dated July 1, 2005.

All tests were conducted at MGA Research Corporation in Troy, Michigan and were performed by MGA engineers and technicians. The FMVSS 201U impactor test machine was used to conduct the testing. Target locations were determined by using a Coordinate Measurement Machine in conjunction with the MGA EZ-Target™ program and MGA procedure MGATP201U_Test Series dated July 1, 2005.

2.0 COMPLIANCE TEST DATA SUMMARY

The 2009 Jaguar XF, was equipped with A, B, and rear-pillars, an adjustable seat belt anchorage on each B-pillar, a fixed seat belt anchorage on each rear pillar, grab handles located on the side rail above the front and rear driver and passenger doors, a sunroof, and an overhead console located on the front upper roof.

Upon completion of targeting the test vehicle, twelve (12) targets were chosen to be impacted based upon engineering judgment and certification test data provided by the manufacturer. The twelve (12) targets chosen were:

AP1	RP1	RH	UR4@BP
BP1	SR2A	UR1@AP	UR5@SR3-2
BP4	SR3-1	UR2@SR2	UR6@RP

The 2009 Jaguar XF, tested appears to comply with the upper interior performance criteria for FMVSS 201. The HIC(d) measured using the Part 572L (Free Motion Headform) was below 1000 for each tested component.

TABLE 2-1

SUMMARY TABLE OF TEST RESULTS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Jaguar XF

VEH. NHTSA NO.: C90205 VIN: SAJWA05BX9HR42140 COLOR: Black


VEH. BUILD DATE: November, 2008 TEST DATES: May 7-8, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

TARGET	VEHICLE SIDE	HORIZONTAL ANGLE (deg)	VERTICAL ANGLE (deg)	VELOCITY (kph)	HIC(d)	FMH HIC	IMPACT ON FMH (mm)	
							Above	Left/Right
AP1	Right	105	29	19.0	389	295	24	6 Left
BP1	Left	270	23	18.9	576	542	65	12 Left
BP4	Right	157	-2	23.9	645	635	20	1 Left
RP1	Left	308	24	23.6	721	734	42	4 Left
SR2A	Right	90	38	19.0	534	488	29	9 Left
SR3-1	Left	270	38	24.1	698	704	16	1 Left
RH	Left	0	50	23.9	659	653	14	16 Left
UR1@APR	Left	225	50	24.1	797	836	22	12 Left
UR2@SR2	Left	270	50	23.9	575	542	22	2 Left
UR4@BPR	Right	90	50	23.9	548	506	24	7 Left
UR5@SR3-2	Right	90	50	24.1	818	863	27	2 Left
UR6@RP	Right	45	50	23.8	793	830	22	3 Right

Above and left/right refers to the position relative to reference pt. 0 where the target made contact with the Free Motion Headform. See the diagram below for details.



POST TEST COMMENTS:

The following description lists any post-test damage or other test observations for each target.

SR3-1 Left: Headliner fastener protrusion visible on the vehicle body exterior roof.

UR5@SR3-2 Right: Headliner fastener protrusion visible on the vehicle body exterior roof.

UR6@RP Right: Headliner fastener protrusion visible on the vehicle body exterior roof.

REMARKS:

The targets listed were impacted in the following order:

Left: BP1, SR3-1, RP1, RH, UR1@APR, UR2@SR2

Right: AP1, SR2A, UR4@BPR, BP4, UR5@SR3-2, UR6@RP

The 150 mm rule was observed for targets horizontal to each other and the 200 mm rule was observed for vertical components.

RECORDED BY: Donald J. Whiteside

DATE: May 8, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-2

GENERAL TEST AND VEHICLE PARAMETER DATA

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Jaguar XF

VEH. NHTSA NO.: C90205 VIN: SAJWA05BX9HR42140 COLOR: Black

VEH. BUILD DATE: November, 2008 TEST DATES: May 7-8, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

INTERIOR TRIM INFORMATION: A, B, and rear-pillars, an adjustable seat belt anchorage on each B-pillar, a fixed seat belt anchorage on each rear pillar, grab handles located on the side rail above the front and rear driver and passenger doors, a sunroof, and an overhead console located on the front upper roof.

SUNROOF INFORMATION:

Installed: Yes No

Operation: Electric Manual

SIDE RAIL CURTAIN AIRBAG INFORMATION:

Installed: Yes No

ROLL-BAR INFORMATION:

Installed: Yes No

Padded: Yes No

Braces: Yes No

GENERAL INFORMATION:

Date Received: February 11, 2009; Odometer Reading 13 miles

DATA FROM VEHICLE'S CERTIFICATION LABEL:

Vehicle Manufactured By: Jaguar Cars, Ltd. Coventry, England

Date of Manufacture: November, 2008; VIN: SAJWA05BX9HR42140

GVWR: 5005 lbs; GAWR FRONT: 2420 lbs;

GAWR REAR: 2585 lbs;

DATA FROM TIRE PLACARD:

Tire Pressure with Maximum Capacity Vehicle Load:

FRONT: 210 kPa REAR: 210 kPa

Recommended Tire Size: 245/45R18

Recommended Cold Tire Pressure:

FRONT: 210 kPa REAR: 210 kPa

Size of Tire on Test Vehicle: 245/45R18

Type of Spare Tire: T135/80R18; Space Saver: X; Standard

VEHICLE CAPACITY DATA:

Type of Front Seats: Bench ; Bucket X; Split Bench

Number of Occupants: Front 2; Rear 3; TOTAL 5

VEHICLE CAPACITY WEIGHT:

Vehicle Capacity Weight (VCW) = 400 kg

No. of Occupants x 68 kg = 340 kg

Rated Cargo/Luggage Weight (RCLW) = 60 kg (difference)

WEIGHT OF TEST VEHICLE AS DELIVERED AT LABORATORY: (with maximum fluids)

Right Front = 467.0 kg Right Rear = 440.0 kg

Left Front = 465.5 kg Left Rear = 440.5 kg

TOTAL FRONT = 932.5 kg TOTAL REAR = 880.5 kg

% Total Weight = 51.4 % % Total Weight = 48.6 %

TOTAL DELIVERED WEIGHT = 1813.0 kg

CALCULATION OF VEHICLE'S TARGET TEST WEIGHT:

Total Delivered Weight = 1813.0 kg

Max. Test Cargo/Luggage Weight = 60.0 kg

Target Test Weight = 1873.0 kg

WEIGHT OF TEST VEHICLE FULLY LOADED:

Right Front =	<u>462.5</u> kg	Right Rear =	<u>474.0</u> kg
Left Front =	<u>461.0</u> kg	Left Rear =	<u>474.5</u> kg
TOTAL FRONT =	<u>923.5</u> kg	TOTAL REAR =	<u>948.5</u> kg
% Total Weight =	<u>49.3</u> %	% Total Weight =	<u>50.7</u> %

TOTAL TEST WEIGHT = 1872.0 kg

Weight of ballast secured in vehicle's cargo area = 59.0 kg

TEST VEHICLE ATTITUDE:

AS DELIVERED: Right Front 711 mm; Left Front 709 mm;
Right Rear 713 mm; Left Rear 713 mm;
Pitch Angle at Right Door Sill = 0.2 Rear is higher
Pitch Angle at Left Door Sill = 0.3 Rear is higher
Roll Angle at Front Bumper = 0.2 Right is higher
Roll Angle at Rear Bumper = 0.2 Right is higher

FULLY LOADED: Right Front 710 mm; Left Front 708 mm;
Right Rear 706 mm; Left Rear 705 mm;
Pitch Angle at Right Door Sill = 0.1 Front is higher
Pitch Angle at Left Door Sill = 0.1 Front is higher
Roll Angle at Front Bumper = 0.2 Right is higher
Roll Angle at Rear Bumper = 0.3 Right is higher

AS TARGETED: Right Front 851 mm; Left Front 850 mm;
Right Rear 858 mm; Left Rear 856 mm;
Pitch Angle at Right Door Sill = 0.2 Rear is higher
Pitch Angle at Left Door Sill = 0.2 Rear is higher
Roll Angle at Front Bumper = 0.2 Right is higher
Roll Angle at Rear Bumper = 0.2 Right is higher

AS TESTED ON RIGHT SIDE:

Pitch Angle at Right Door Sill = 0.1 Rear is higher
Pitch Angle at Left Door Sill = 0.1 Rear is higher
Roll Angle at Front Bumper = 0.2 Right is higher
Roll Angle at Rear Bumper = 0.3 Right is higher

AS TESTED ON LEFT SIDE:

Pitch Angle at Right Door Sill = 0.1 Rear is higher
Pitch Angle at Left Door Sill = 0.1 Rear is higher
Roll Angle at Front Bumper = 0.2 Right is higher
Roll Angle at Rear Bumper = 0.2 Right is higher

VEHICLE WHEELBASE = 2845 mm

REMARKS: The seat travel distance was measured to be 240 mm for the driver front seat and 240 mm for the passenger front seat.

RECORDED BY: Donald J. Whiteside

DATE: April 30, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-3
HORIZONTAL IMPACT ANGLE RANGE FOR A AND B PILLARS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Jaguar XF

VEH. NHTSA NO.: C90205 VIN: SAJWA05BX9HR42140 COLOR: Black

VEH. BUILD DATE: November, 2008 TEST DATES: May 7-8, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

HORIZONTAL IMPACT ANGLE RANGE FOR A AND B PILLARS

	HORIZONTAL ANGLE SPECIFIED RANGE	MINIMUM HORIZONTAL ANGLE	MAXIMUM HORIZONTAL ANGLE
A-PILLAR	L 195°-255°	L 204.2°	L 255.0°
	R 105°-165°	R 105.0°	R 157.5°
B-PILLAR	L 195°-345°	L 203.2°	L 306.1°
	R 15°-165°	R 53.9°	R 157.0°

AS DETERMINED USING THE PROCEDURES SPECIFIED IN S8.13.4.1

REMARKS:

RECORDED BY: Donald J. Whiteside

DATE: April 30, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-4

VERTICAL IMPACT ANGLE RANGES

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Jaguar XF

VEH. NHTSA NO.: C90205 VIN: SAJWA05BX9HR42140 COLOR: Black

VEH. BUILD DATE: November, 2008 TEST DATES: May 7-8, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

VERTICAL IMPACT ANGLE RANGES

		VERTICAL ANGLE SPECIFIED RANGE	MINIMUM VERTICAL ANGLE	MAXIMUM VERTICAL ANGLE
FRONT HEADER	FH1	L 0°-50°	L 0°	L 50°
		R 0°-50°	R 0°	R 50°
	FH2	L 0°-50°	L 0°	L 50°
		R 0°-50°	R 0°	R 50°
SIDE RAIL	SR1	L 0°-50°	L 0°	L 38°
		R 0°-50°	R 0°	R 38°
	SR2A	L 0°-50°	L 0°	L 39°
		R 0°-50°	R 0°	R 38°
	SR2B	L 0°-50°	L 0°	L 44°
		R 0°-50°	R 0°	R 43°
	SR3-1	L 0°-50°	L 0°	L 38°
		R 0°-50°	R 0°	R 34°
	SR3-2	L 0°-50°	L 0°	L 28°
		R 0°-50°	R 0°	R 29°
REAR HEADER	RH	L 0°-50°	L 0°	L 50°
		R 0°-50°	R 0°	R 50°
A-PILLAR	AP1	L -5°-50°	L -5°	L 28°
		R -5°-50°	R -5°	R 29°

		VERTICAL ANGLE SPECIFIED RANGE		MINIMUM VERTICAL ANGLE		MAXIMUM VERTICAL ANGLE	
	AP2	L	-5°-50°	L	-5°	L	50°
		R	-5°-50°	R	-5°	R	50°
	AP3	L	-5°-50°	L	-5°	L	50°
		R	-5°-50°	R	-5°	R	50°
B-PILLAR	BP1	L	-10°-50°	L	-10°	L	23°
		R	-10°-50°	R	-10°	R	23°
	BP2*	L	0°-50°	L	0°	L	13°
		R	0°-50°	R	0°	R	13°
	BP3	L	-10°-50°	L	-10°	L	-3°
		R	-10°-50°	R	-10°	R	-3°
	BP4	L	-10°-50°	L	-10°	L	-2°
		R	-10°-50°	R	-10°	R	-2°
REAR PILLAR	RP1	L	-10°-50°	L	-10°	L	24°
		R	-10°-50°	R	-10°	R	25°
	RP2*	L	-10°-50°	L	-10°	L	13°
		R	-10°-50°	R	-10°	R	13°
UPPER ROOF 1			0°-50°		0°		50°
UPPER ROOF 2			0°-50°		0°		50°
UPPER ROOF 3			0°-50°		0°		22°
UPPER ROOF 4			0°-50°		0°		50°
UPPER ROOF 5			0°-50°		0°		50°
UPPER ROOF 6			0°-50°		0°		50°

As determined using the Procedures specified in S8.13.4.2. *Targets BP2 and RP2 are a seat belt anchorage locations.

RECORDED BY: Donald J. Whiteside

DATE: April 30, 2009

APPROVED BY: Helen A. Kaleto

TABLE 2-5

TARGET MEASUREMENTS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Jaguar XF

VEH. NHTSA NO.: C90205 VIN: SAJWA05BX9HR42140 COLOR: Black

VEH. BUILD DATE: November, 2008 TEST DATES: May 7-8, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

Measurement	Description	Left Side	Right Side
M	Seat Fore/Aft Travel (Front seats)	240 mm	240 mm
T°	Horizontal < {CG-F1 (Left Seat) to (Right A-Pillar)}	104.2°	--
A1°	360° - T°	255.0°	--
W°	Horizontal < {CG-2 (Left Seat) to (Left A-Pillar)}	204.2°	--
A2°	A2° = W°	204.2°	--
U°	Horizontal < {CG-2 (Left Seat) to (Left B-Pillar)}	306.1°	--
B1°	B1° = U°	306.1°	--
V°	Horizontal < {CG-R (Left Seat) to (Left B-Pillar)}	203.2°	--
B2°	B2° = V°	203.2°	--
W° (right)	Horizontal < {CG-F2 (Right Seat) to (Right A-Pillar)}	--	157.5°
A1° (right)	A1° (right) = W° (right)	--	157.5°
T ° (right)	Horizontal < {CG-F1 (Right Seat) to (Left A-Pillar)}	--	256.4°
A2° (right)	360°-T° (right)	--	105.0°
V ° (right)	Horizontal < {CG-R (Right Seat) to (Right B-Pillar)}	--	157.0°
B1° (right)	B1° (right) = V° (right)	--	157.0°
U ° (right)	Horizontal < {CG-F2 (Right Seat) to (Right B-Pillar)}	--	53.9°
B2° (right)	B2° (right) = U° (right)	--	53.9°
J	A-Pillar {(Plane 3) – (Plane 5)}	334.1 mm	330.7 mm
J/2	J ÷ 2	167.1 mm	165.4 mm
D1	Upper Roof {(Plane A) – (Plane B)}	1680.9 mm	
D1/2	D1 ÷ 2	840.5 mm	

Measurement	Description	Left Side	Right Side
D2	Upper Roof {(Plane C) – (Plane D)}	1174.2 mm	
D2/2	D2 ÷ 2	587.1 mm	
.35D1	.35 x D1	588.3 mm	
.35D2	.35 x D2	411.0 mm	
N	B-Pillar {(BPR) – (lowest point on daylight opening forward of B-Pillar)}	376.5 mm	388.5 mm
N/2	B-Pillar {(BP3) – (lowest point on daylight opening forward of B-Pillar)}	188.3 mm	194.3 mm
N/4	B-Pillar {(BP4) – (lowest point on daylight opening forward of B-Pillar)}	94.1 mm	97.1 mm
D	R-Pillar (Point 7 – Point M)	721.0 mm	721.0 mm
3D/7	3*D / 7	309.0 mm	309.0 mm

As determined using the Procedures specified in S10.1-10.13.

SgRP Locations (world coordinates)						
	Left (mm)			Right (mm)		
	x	y	z	x	y	z
Front	2942.0	-380.0	650.0	2942.0	380.0	650.0
Rear	3792.0	-360.0	656.0	3792.0	360.0	656.0

SgRP Locations (vehicle coordinates)						
	Left (mm)			Right (mm)		
	x	y	z	x	y	z
Front	2942.0	-380.0	650.0	2942.0	380.0	650.0
Rear	3792.0	-360.0	656.0	3792.0	360.0	656.0

CG Locations (world coordinates)						
	Left (mm)			Right (mm)		
	x	y	z	x	y	z
CGF1	2862.0	-380.0	1310.0	2862.0	380.0	1310.0
CGF2	3102.0	-380.0	1310.0	3102.0	380.0	1310.0
CGR	3952.0	-360.0	1316.0	3952.0	360.0	1316.0

REFERENCE FOR VEHICLE COORDINATE SYSTEM (measured in millimeters):

Passenger seat front outboard anchor hole (x, y, z) = 2720.35, 603.0, 439.45

Passenger seat rear inboard anchor hole (x, y, z) = 3114.18, 194.0, 398.06

Driver seat front outboard anchor hole (x, y, z) = 2720.35, -603.0, 439.45

REMARKS:

RECORDED BY: Donald J. Whiteside

DATE: April 30, 2009

APPROVED BY: Helen A. Kalet

TABLE 2-6

SUMMARY OF TARGETING RESULTS

VEH. MOD YR/MAKE/MODEL/BODY: 2009 Jaguar XF

VEH. NHTSA NO.: C90205 VIN: SAJWA05BX9HR42140 COLOR: Black

VEH. BUILD DATE: November, 2008 TEST DATES: May 7-8, 2009

TEST LABORATORY: MGA Research Corporation

OBSERVERS: Andrew Gould, Ryan Jones, Helen A. Kaleto, Donald J. Whiteside

SUMMARY OF TARGETING RESULTS								
Target	Location (mm)			Horizontal Angle (deg)	Vertical Angle (deg)	Relocation (Yes/No)	Extension (# of 25 mm Spheres)	Impact (Yes/No)
	x	y	z					
A-Pillar Left Side								
AP1	2868.7	-516.3	1447.5	--	--	Yes	--	--
REL	2877.7	-536.4	1410.6	255	28	--	2	No
AP2	2759.2	-552.7	1359.8	204	50	No	--	No
AP3	2566.9	-589.4	1280.1	204	50	No	--	No
A-Pillar Right Side								
AP1	2868.2	516.1	1449.8	--	--	Yes	--	--
REL	2875.5	534.9	1407.3	105	29	--	2	Yes
AP2	2754.8	556.0	1361.9	157	50	No	--	No
AP3	2569.4	595.9	1284.4	157	50	No	--	No
B-Pillar Left Side								
BP1	3357.9	-483.9	1487.3	--	--	Yes	--	--
REL	3357.2	-468.9	1488.7	270	23	--	1	Yes
BP2	3309.8	-617.7	1228.4	270	13	No	--	No
BP3	3260.9	-607.3	1299.5	306	-3	No	--	No
BP4	3362.6	-656.3	1205.4	203	-2	No	--	No
B-Pillar Right Side								
BP1	3354.3	483.2	1488.4	--	--	Yes	--	--
REL	3356.2	458.7	1491.7	90	23	--	1	No
BP2	3309.7	619.7	1226.0	90	13	No	--	No

SUMMARY OF TARGETING RESULTS								
Target	Location (mm)			Horizontal Angle (deg)	Vertical Angle (deg)	Relocation (Yes/No)	Extension (# of 25 mm Spheres)	Impact (Yes/No)
	x	y	z					
BP3	3259.0	609.9	1294.1	54	-3	No	--	No
BP4	3357.8	660.6	1197.7	157	-2	No	--	Yes
Rear Pillar Left Side								
RP1	4203.2	-501.8	1414.9	308	24	No	--	Yes
RP2	4237.3	-600.8	1272.9	--	--	Yes	--	--
REL	4168.6	-575.1	1353.7	305	13	--	4	No
Rear Pillar Right Side								
RP1	4204.2	491.5	1417.3	52	25	No	--	No
RP2	4241.6	605.6	1268.7	--	--	Yes	--	--
REL	4162.3	579.6	1353.1	45	13	--	4	No
Front Header Left Side								
FH1	2768.1	-393.5	1443.7	180	50	No	--	No
FH2	2741.4	-244.0	1441.7	180	50	No	--	No
Front Header Right Side								
FH1	2774.4	398.3	1445.9	180	50	No	--	No
FH2	2743.5	252.9	1445.9	180	50	No	--	No
Side Rail Left Side								
SR1	3018.0	-500.0	1477.7	--	--	Yes	--	--
REL	3013.9	-528.1	1436.8	270	38	--	2	No
SR2A	3168.5	-505.6	1498.5	--	--	Yes	--	--
REL	3169.5	-521.6	1456.9	270	39	--	2	No
SR2B	3057.5	-507.7	1490.5	--	--	Yes	--	--
REL	3050.9	-470.7	1470.1	270	44	--	2	No
SR3-1	3711.2	-482.9	1470.6	270	38	No	--	Yes
SR3-2	3880.6	-489.9	1463.7	270	28	No	--	No
Side Rail Right Side								
SR1	3017.5	505.6	1479.0	--	--	Yes	--	--
REL	3017.9	525.4	1437.7	90	38	--	2	No
SR2A	3167.4	502.1	1501.3	--	--	Yes	--	--

SUMMARY OF TARGETING RESULTS								
Target	Location (mm)			Horizontal Angle (deg)	Vertical Angle (deg)	Relocation (Yes/No)	Extension (# of 25 mm Spheres)	Impact (Yes/No)
	x	y	z					
REL	3165.2	516.3	1460.3	90	38	--	2	Yes
SR2B	3054.5	506.1	1496.5	--	--	Yes	--	--
REL	3049.0	469.4	1471.2	90	43	--	2	No
SR3-1	3708.4	486.0	1471.0	90	34	No	--	No
SR3-2	3879.5	493.0	1464.1	90	29	No	--	No
Rear Header Left Side								
RH	4180.7	-359.2	1451.3	0	50	No	--	Yes
Rear Header Right Side								
RH	4184.5	359.5	1448.3	0	50	No	--	No
Upper Roof Left Side								
UR1@APR	2914.4	-396.3	1468.2	225	50	No	--	Yes
UR2@SR2	3212.1	-400.2	1491.0	270	50	No	--	Yes
UR3@Sun Roof Front Edge	3012.5	162.5	1500.5	180	22	No	--	No
Upper Roof Right Side								
UR4@BPR	3383.8	393.2	1493.0	90	50	No	--	Yes
UR5@SR3-2	3888.1	389.5	1484.4	90	50	No	--	Yes
UR6@RP	4076.6	396.5	1481.3	45	50	No	--	Yes



As determined using the Procedures specified in S10.1-10.13.



RECORDED BY: Donald J. Whiteside

DATE: April 30, 2009

APPROVED BY: Helen A. Kalet

3.0 TEST DATA (Including Acceleration and Velocity Plots)

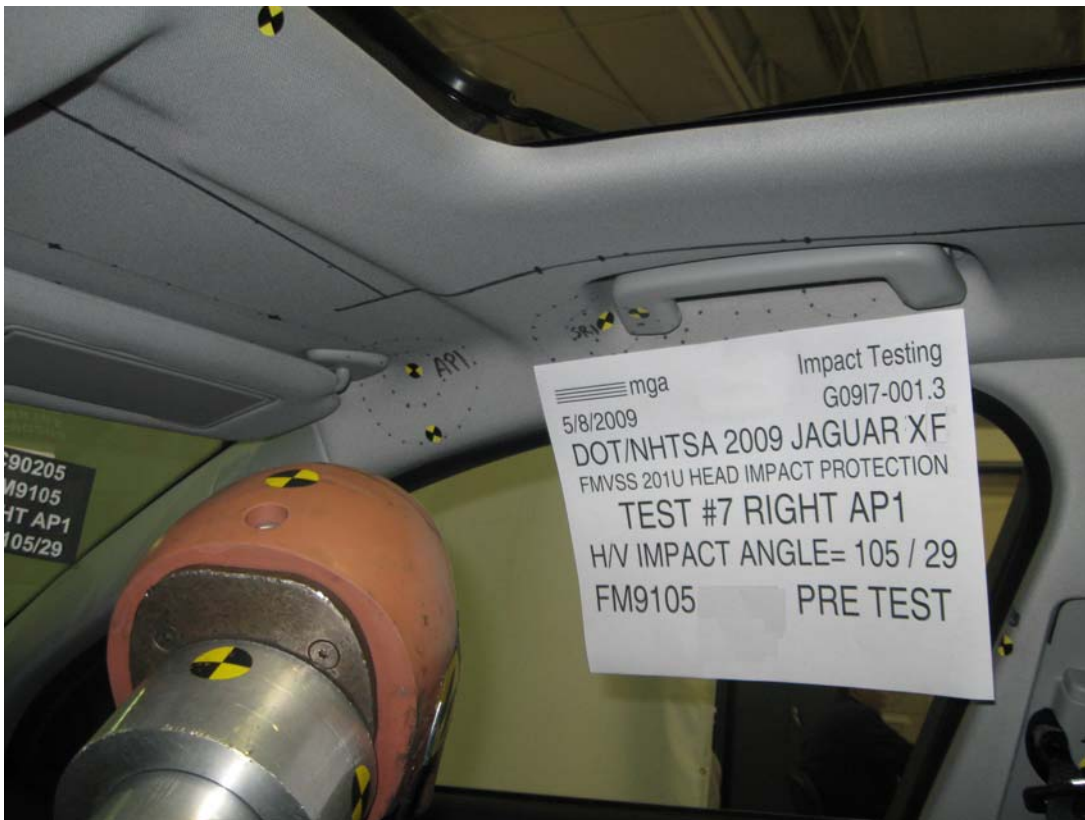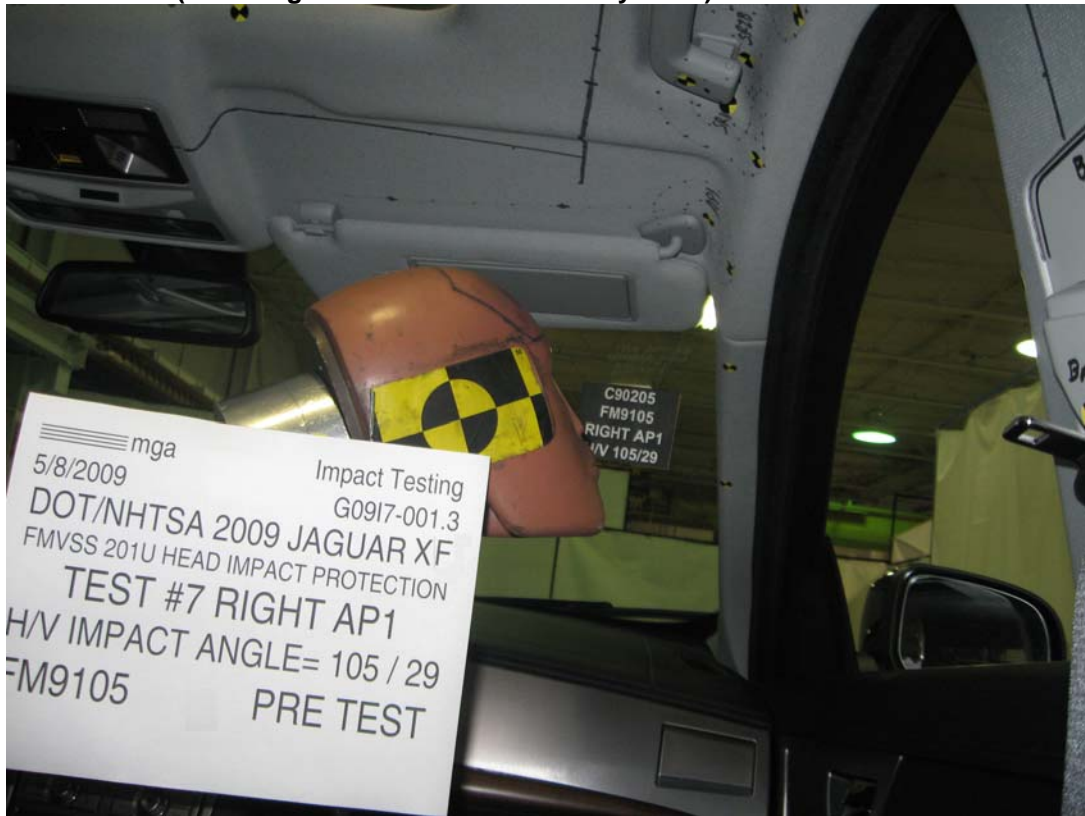

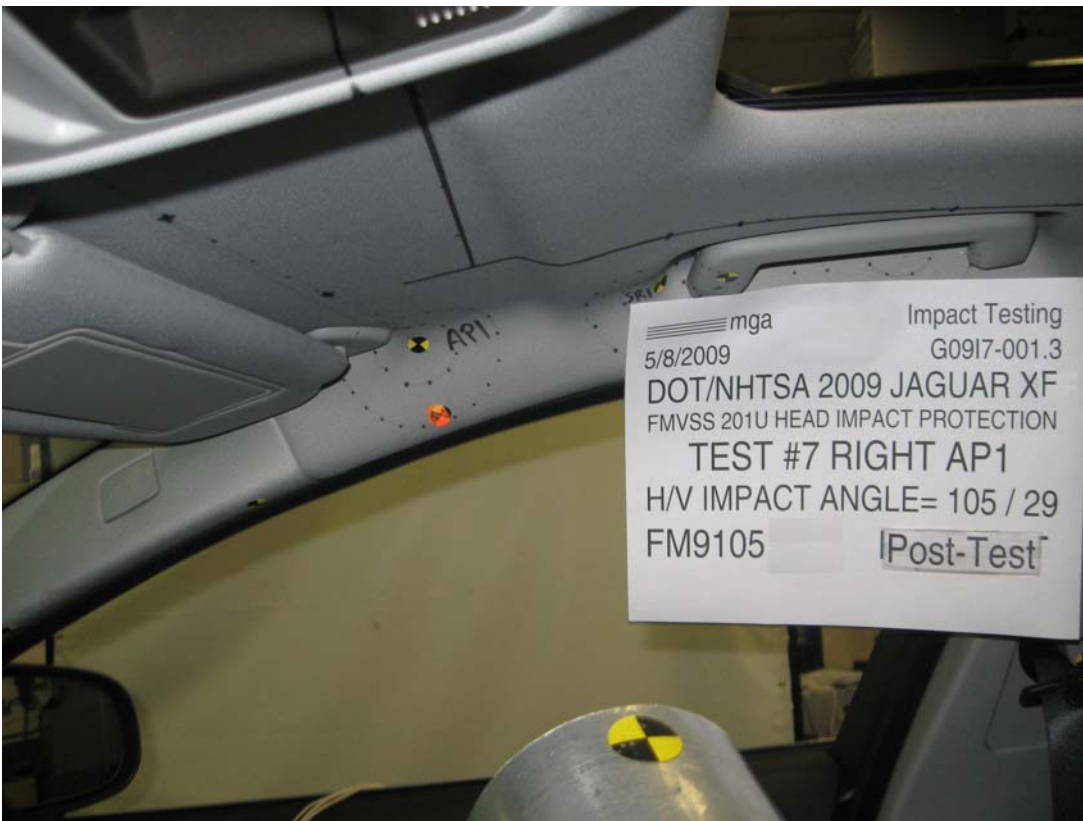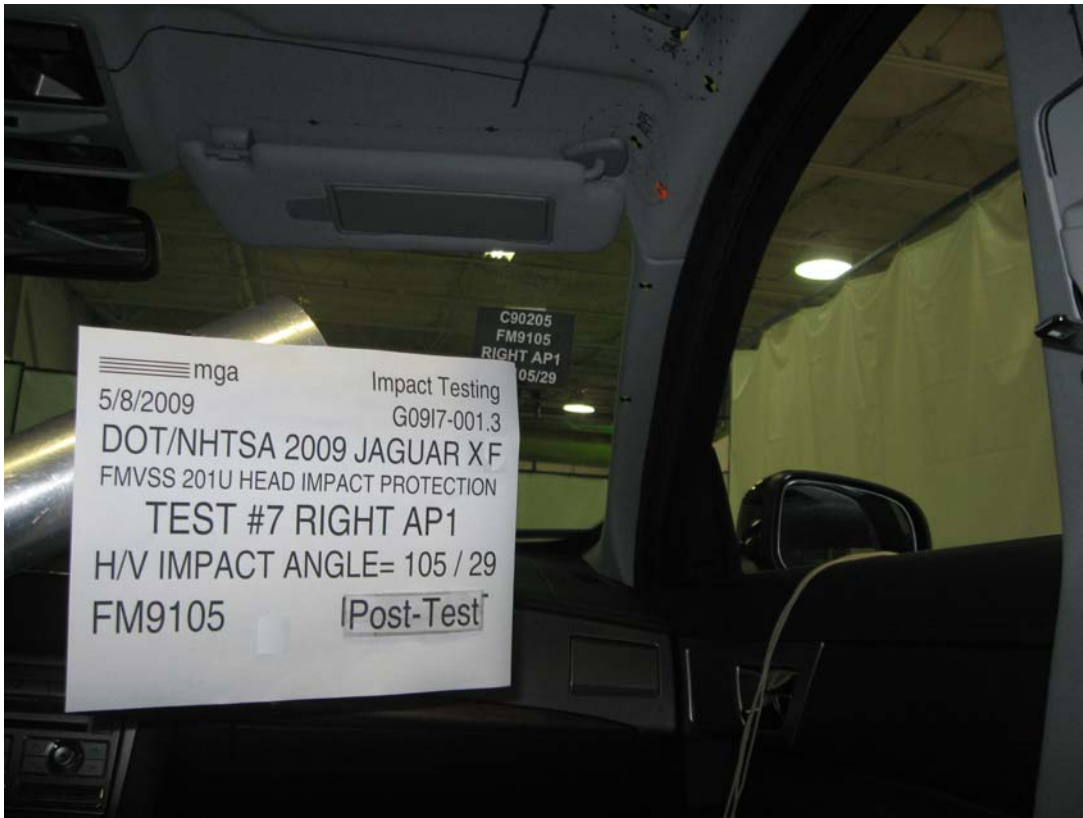



SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number:#7

Target (Vehicle Side): AP1Right

Temperature:20.9C

MGA Test Reference No.:FM9105

Humidity:60.0%

Approach Horizontal Angles:105°

Time of Test:10:23:10 AM

Approach Vertical Angles:29°

FMH Serial No:[035]

Additional Description:Relocation Spheres: 2

TEST RESULTS:



HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
389	295	4.7	19.0	24	6 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J35919	-95.6	1.05	1.05
Y	6	J22664	94.3	0.84	0.84
Z	7	J35924	92.8	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):



No damage observed



Recorded By:  Approved By*:  Date: 5/8/2009
*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9105


Target Location: API, Left Side


Test Date: 5/8/2009

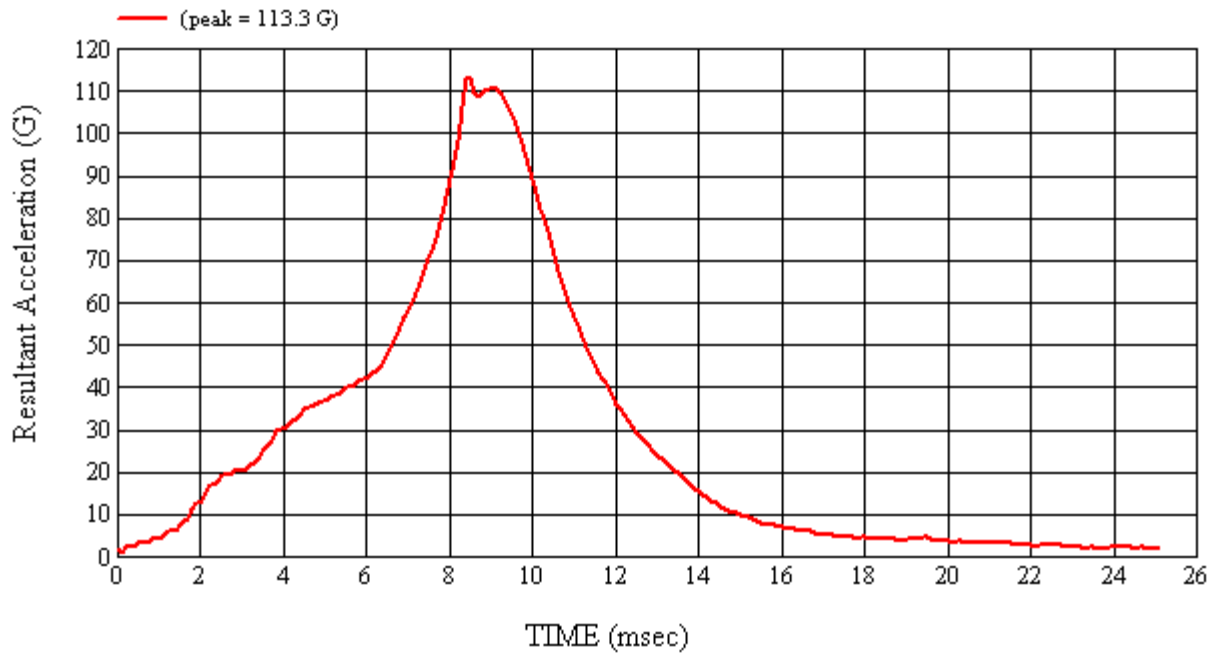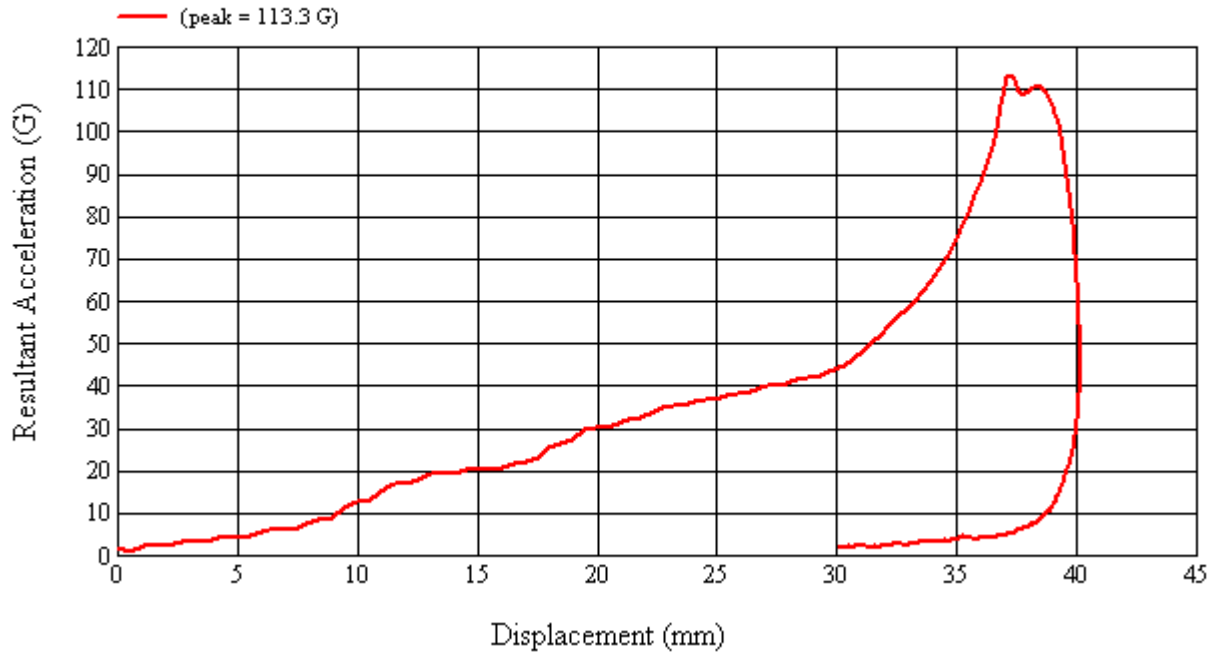


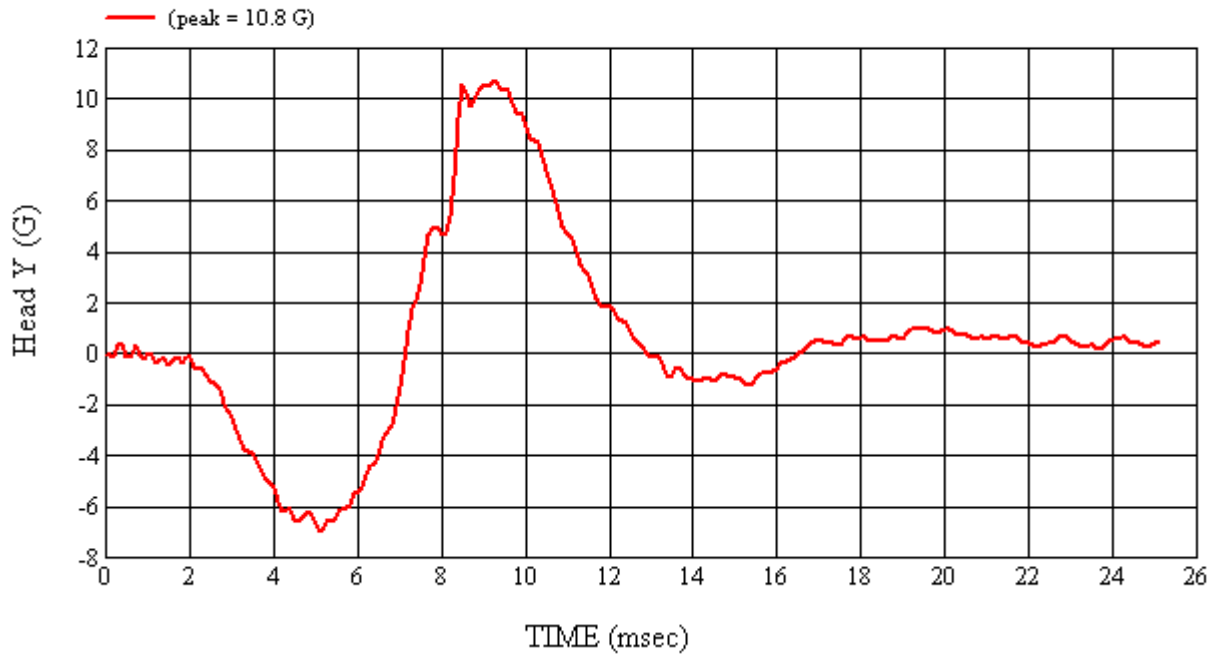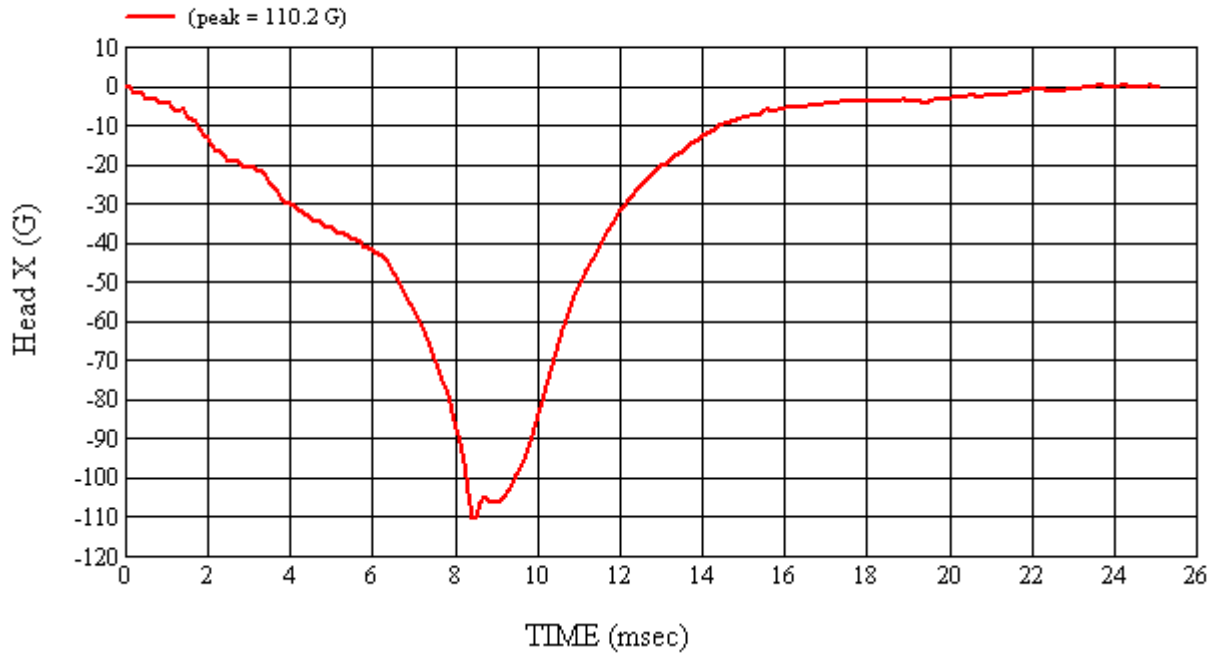

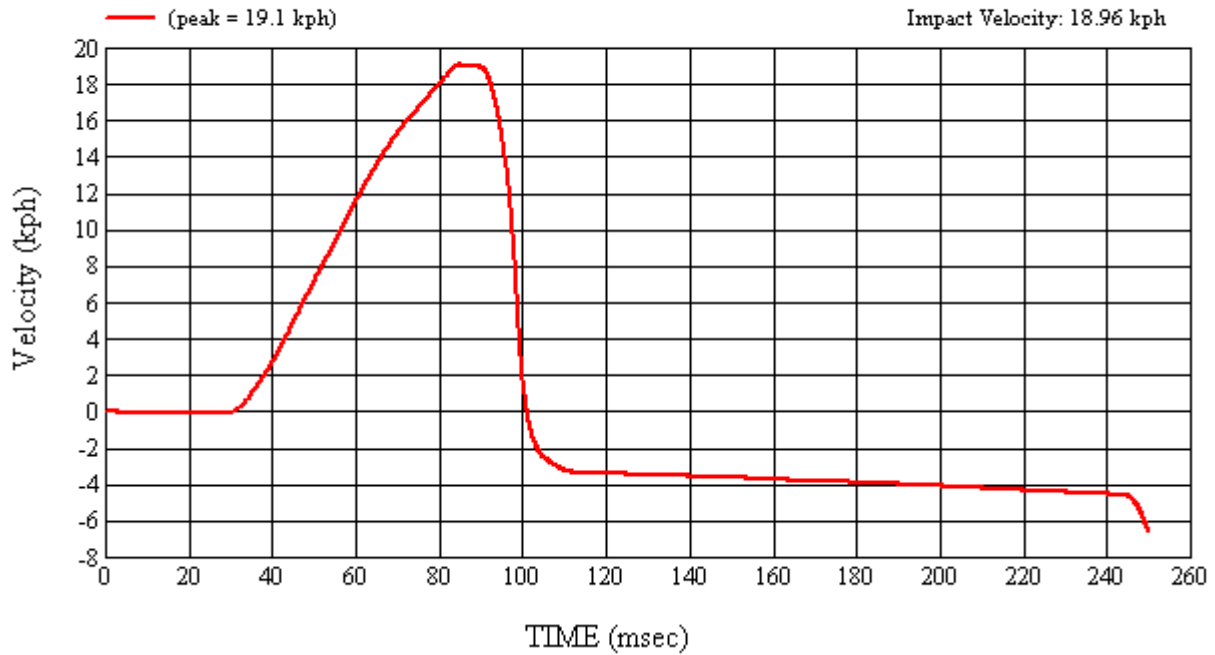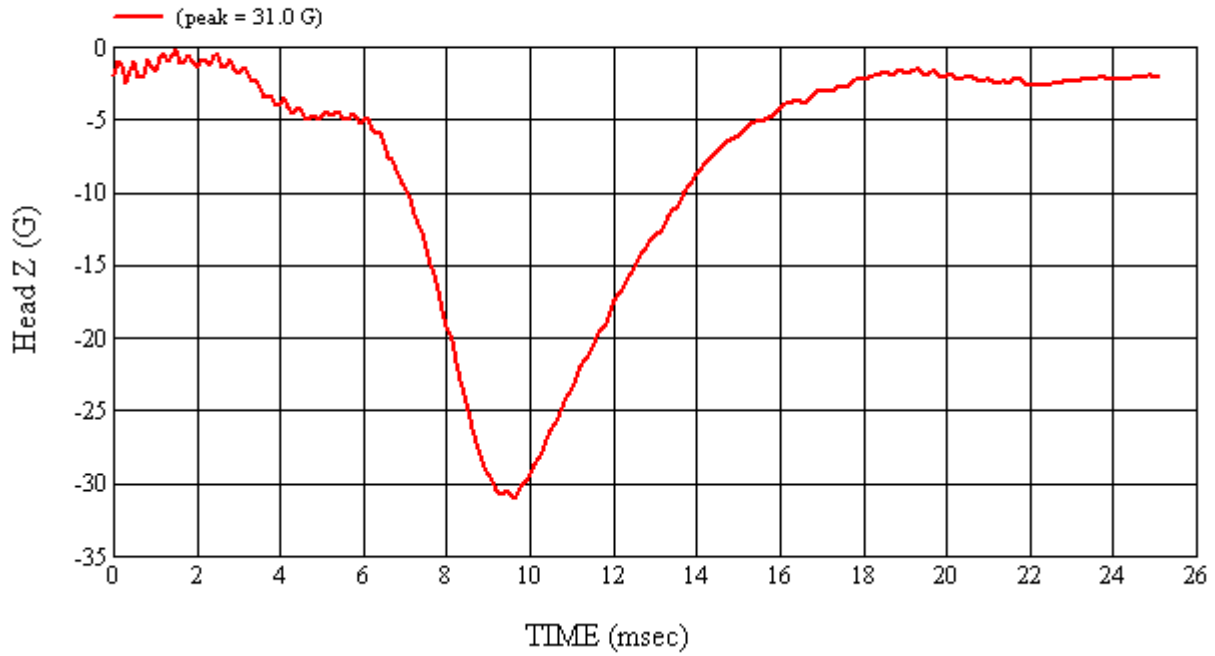

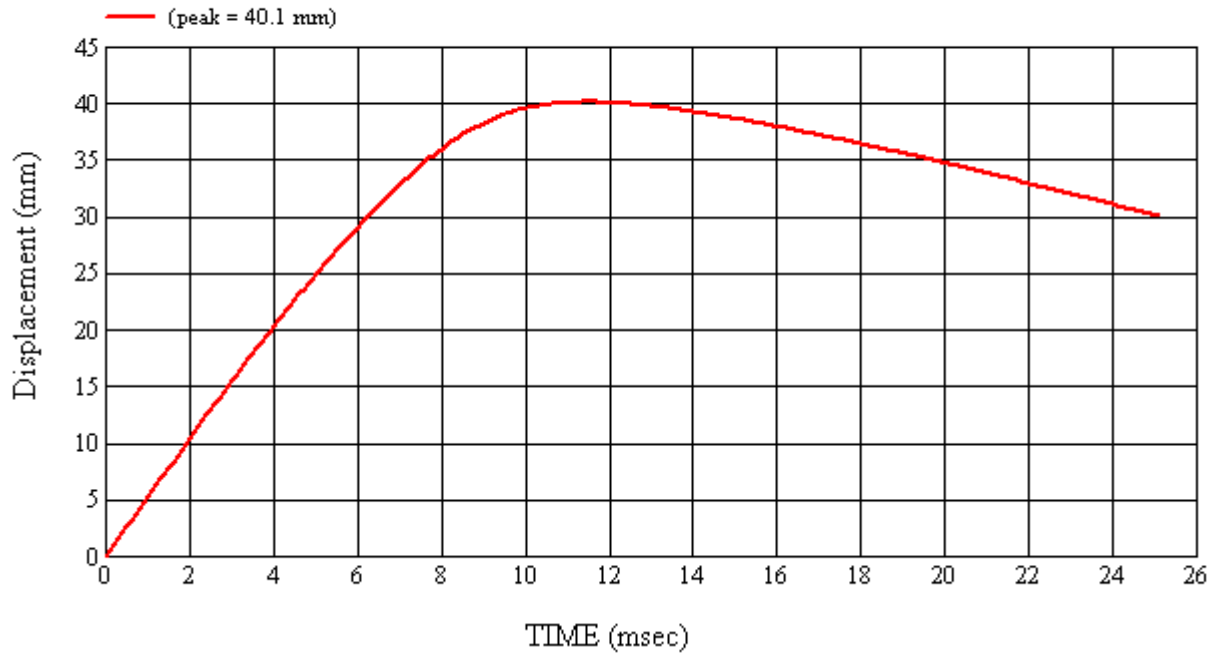

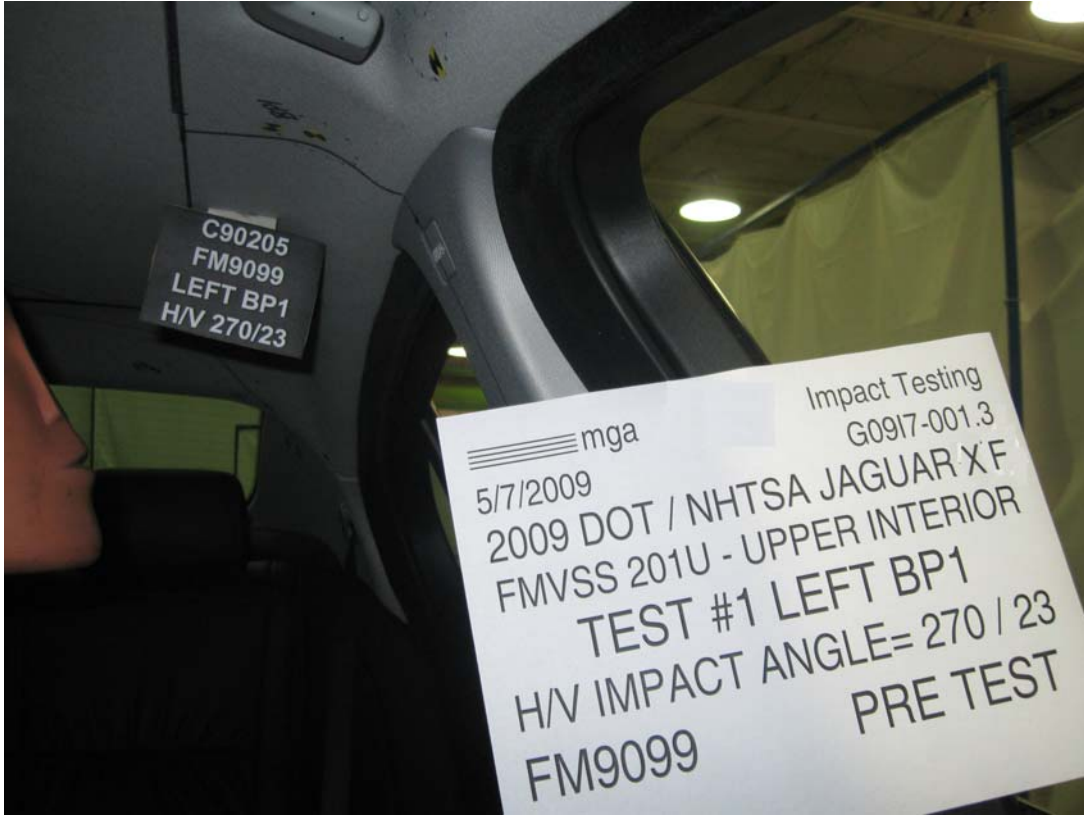

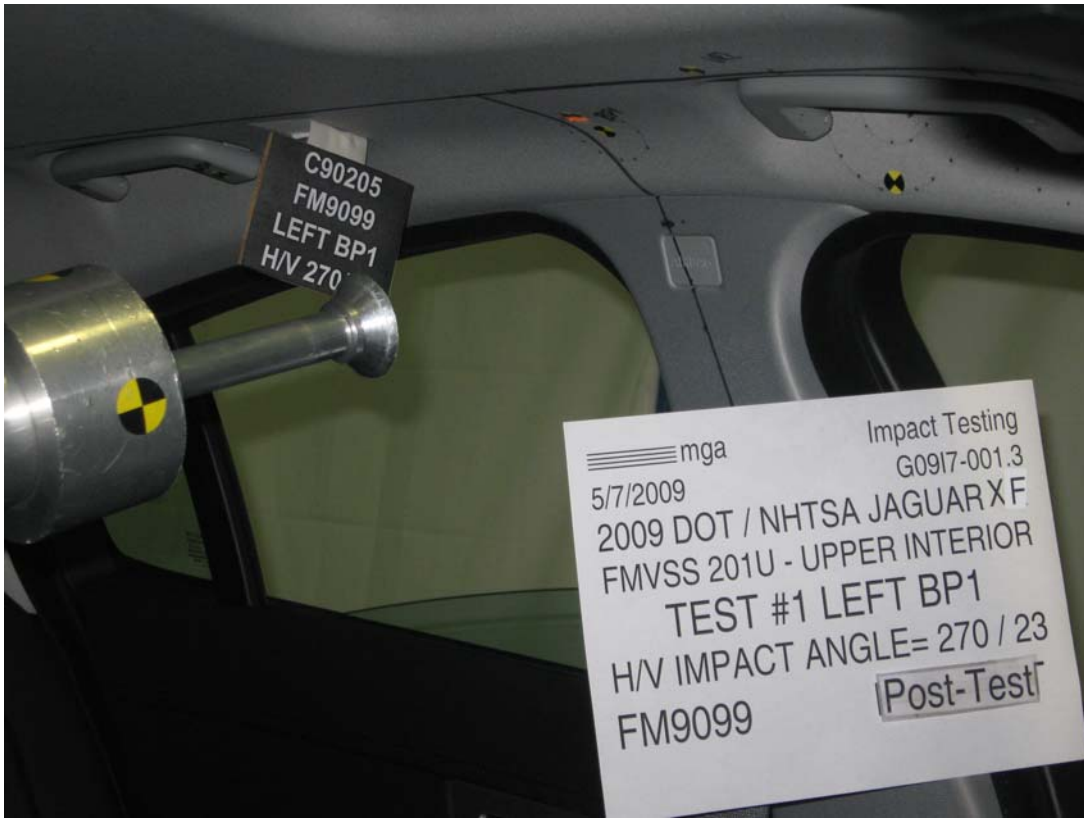



SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number:#1

Target (Vehicle Side): BP1Left

Temperature:21.1C

MGA Test Reference No.:FM9099

Humidity:53.5%

Approach Horizontal Angles:270°

Time of Test:11:03:13 AM

Approach Vertical Angles:23°

FMH Serial No:[035]

Additional Description:1 Relocation

TEST RESULTS:

HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
576	542	7.1	18.9	65	12 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J35919	-95.6	1.06	1.06
Y	6	J22664	94.3	0.85	0.85
Z	7	J35924	92.8	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):

No visible damage





Recorded By: _____ Approved By*: Aben A. Kalato Date: 5/7/2009



*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9099


Target Location: BPI, Left Side



Test Date: 5/7/2009

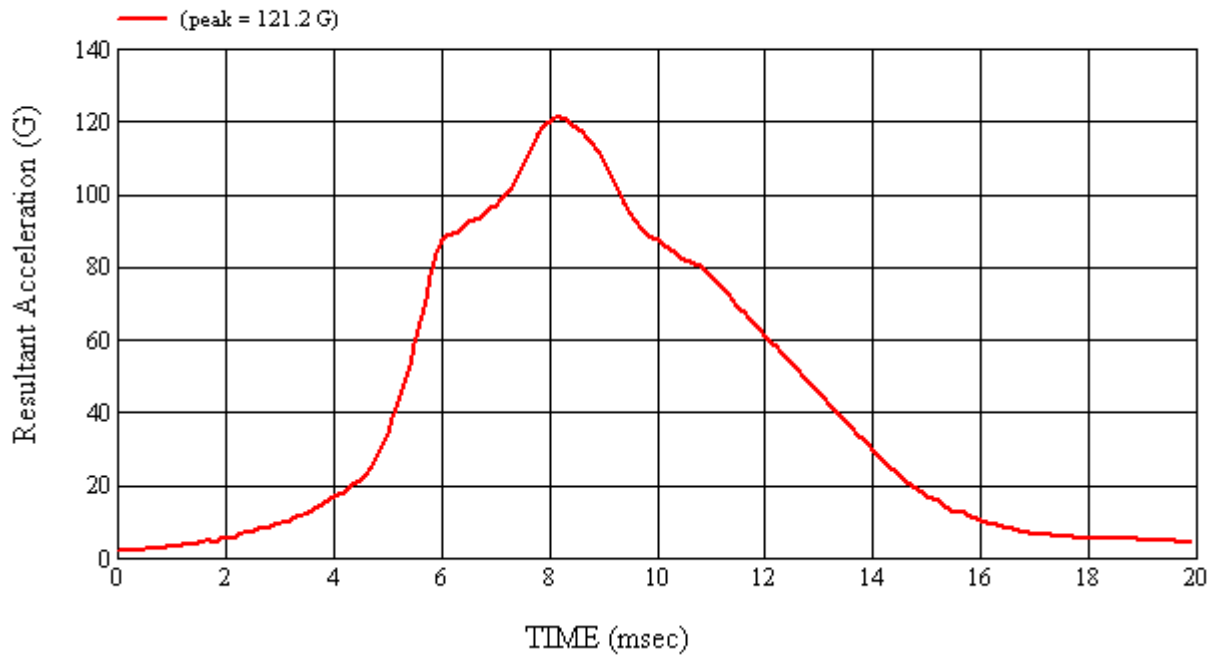
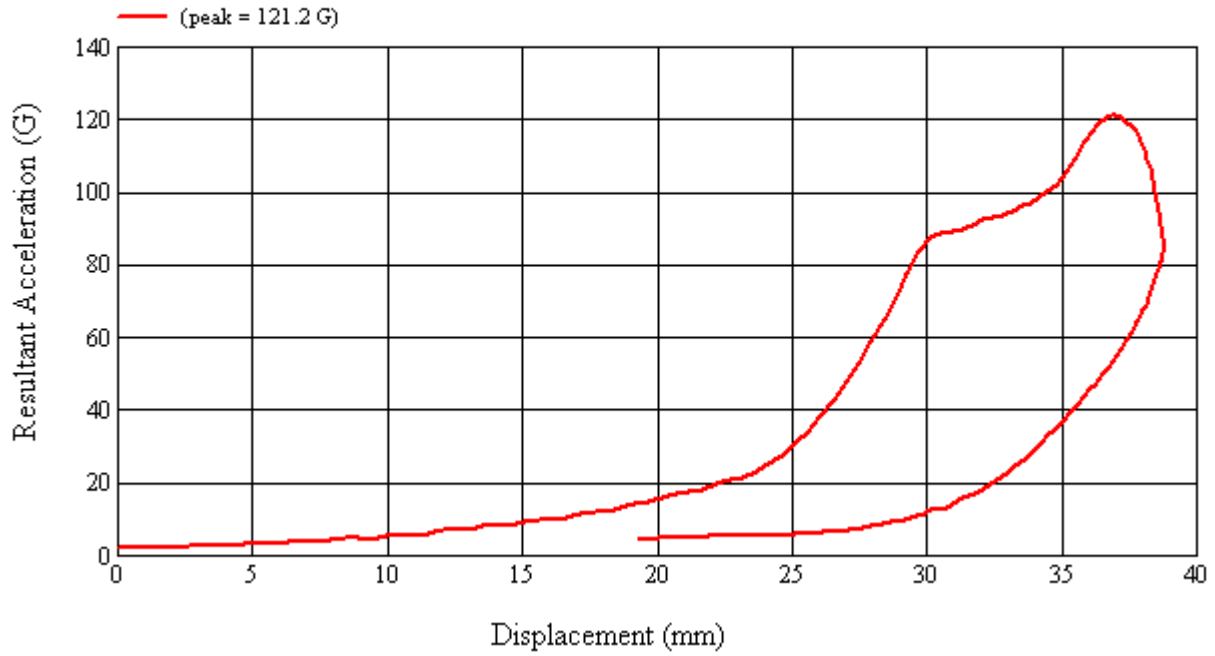


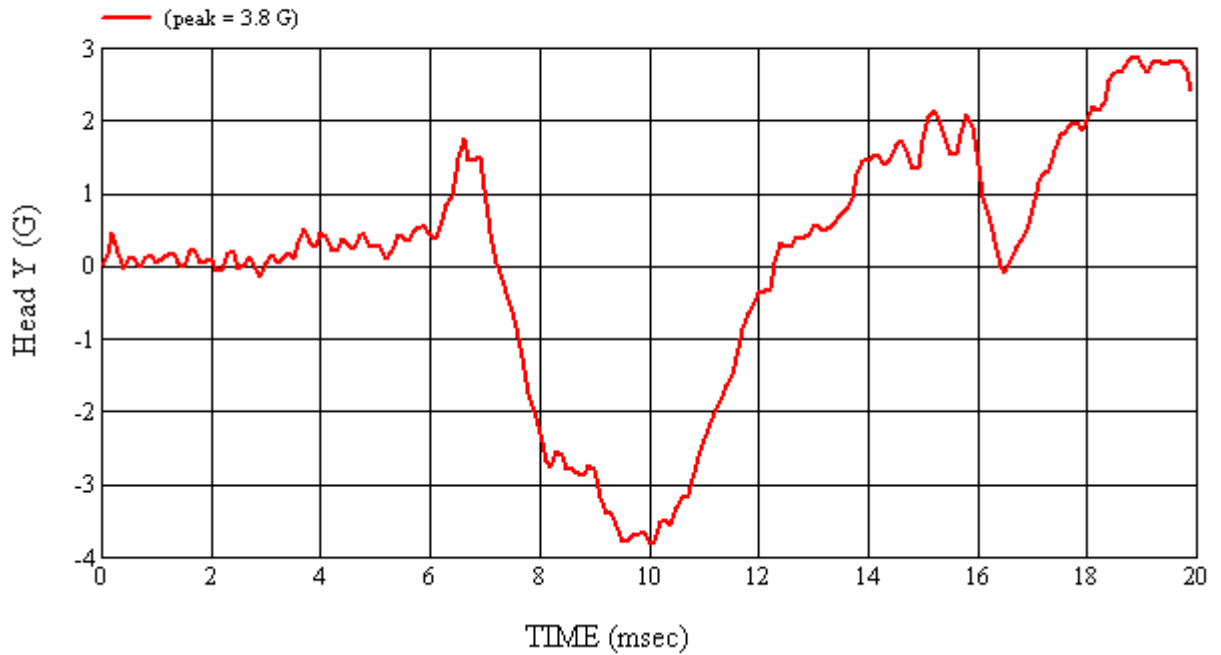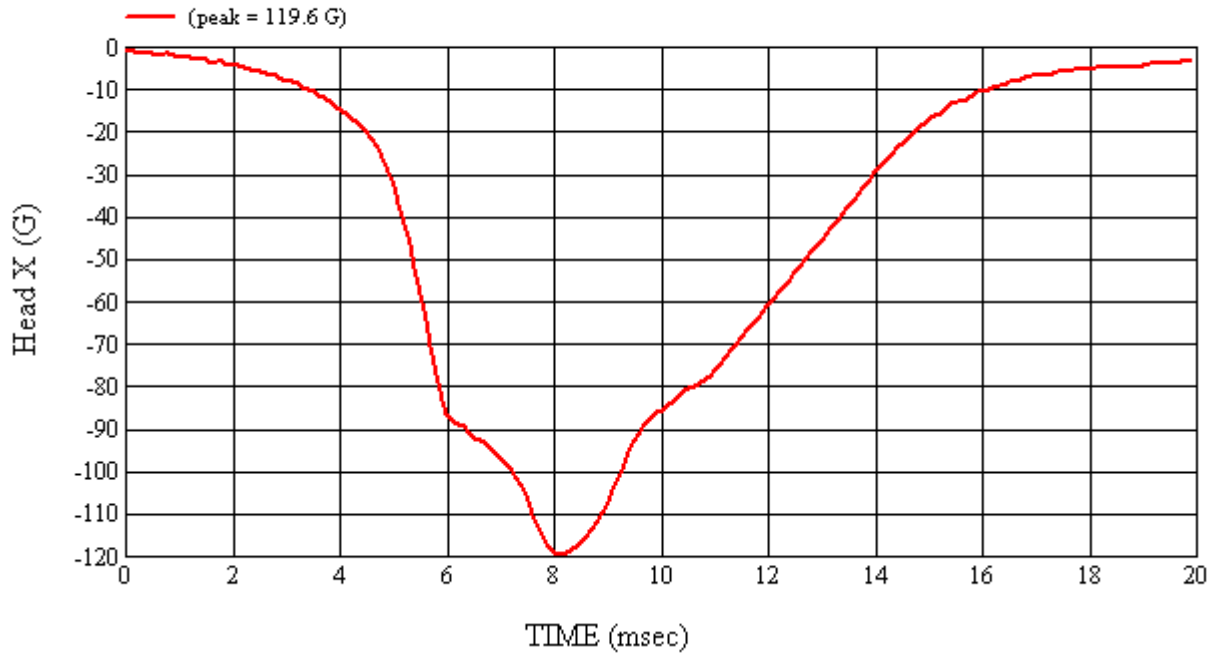

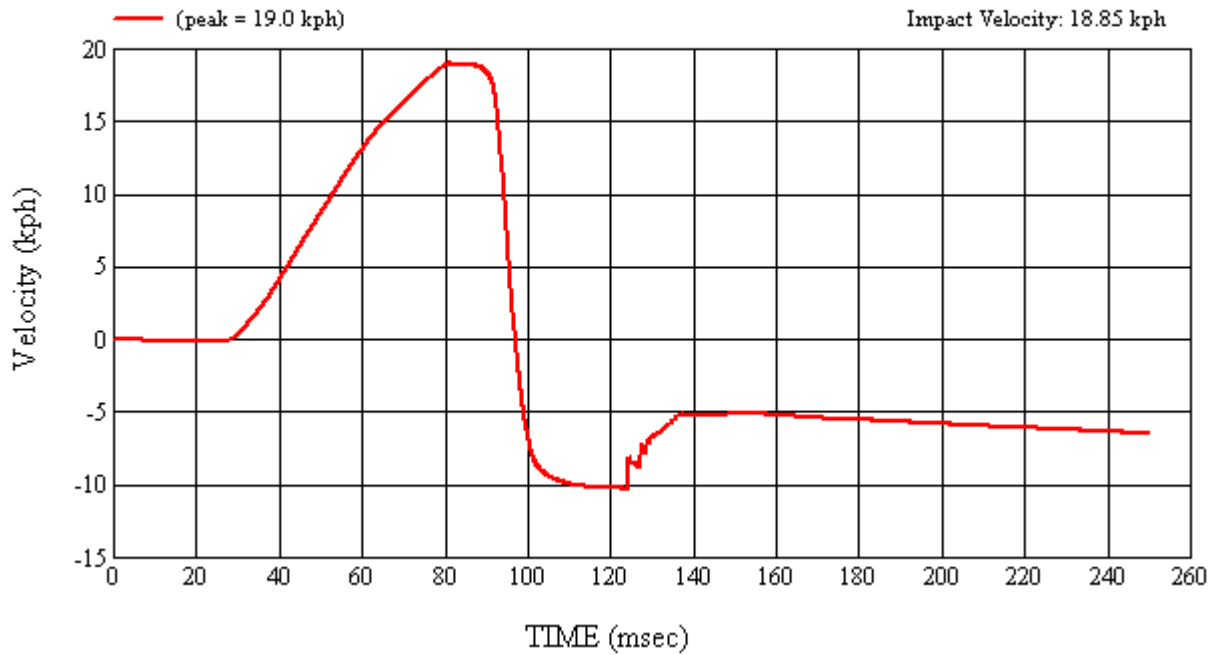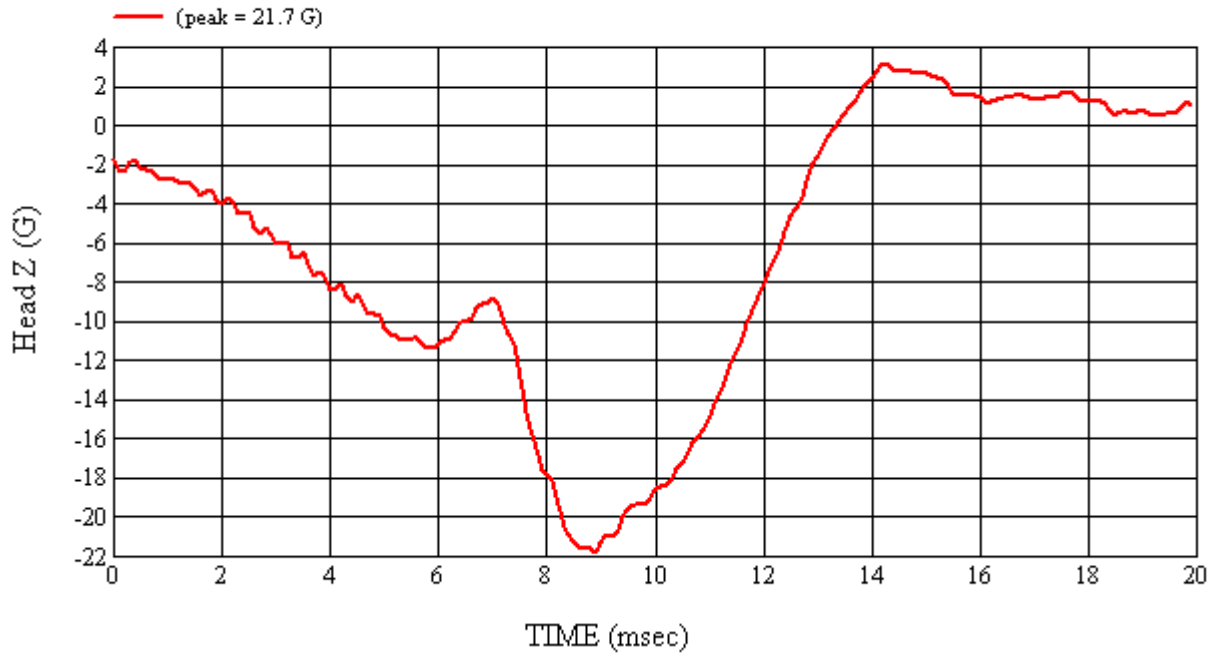

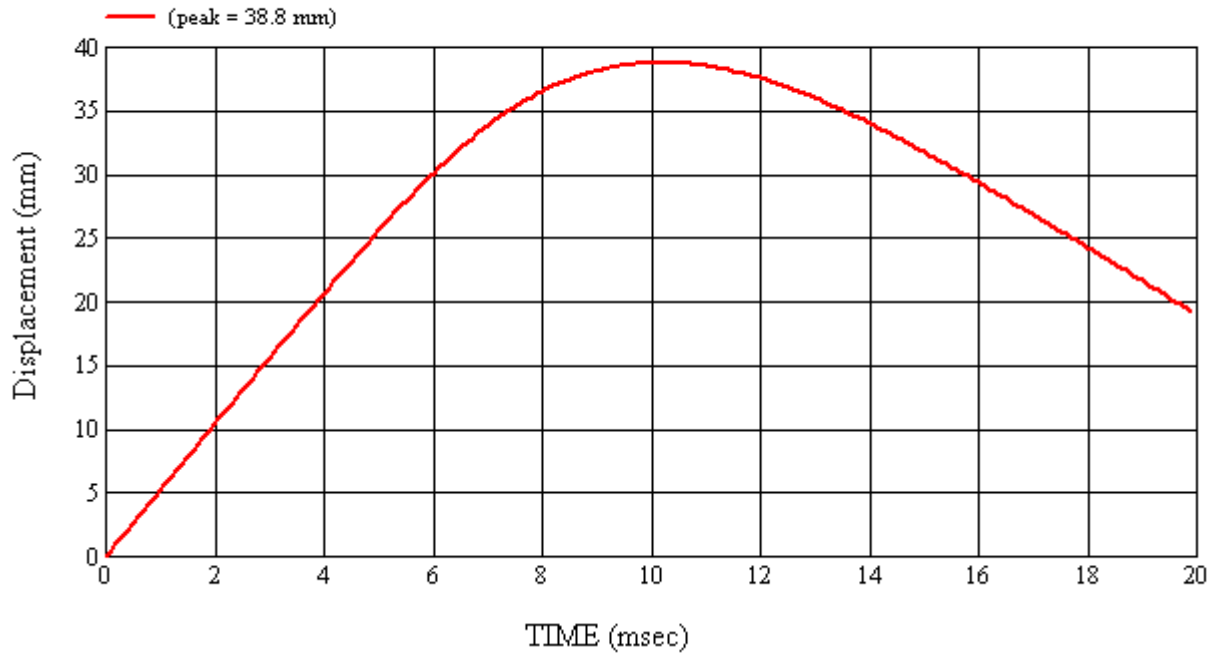

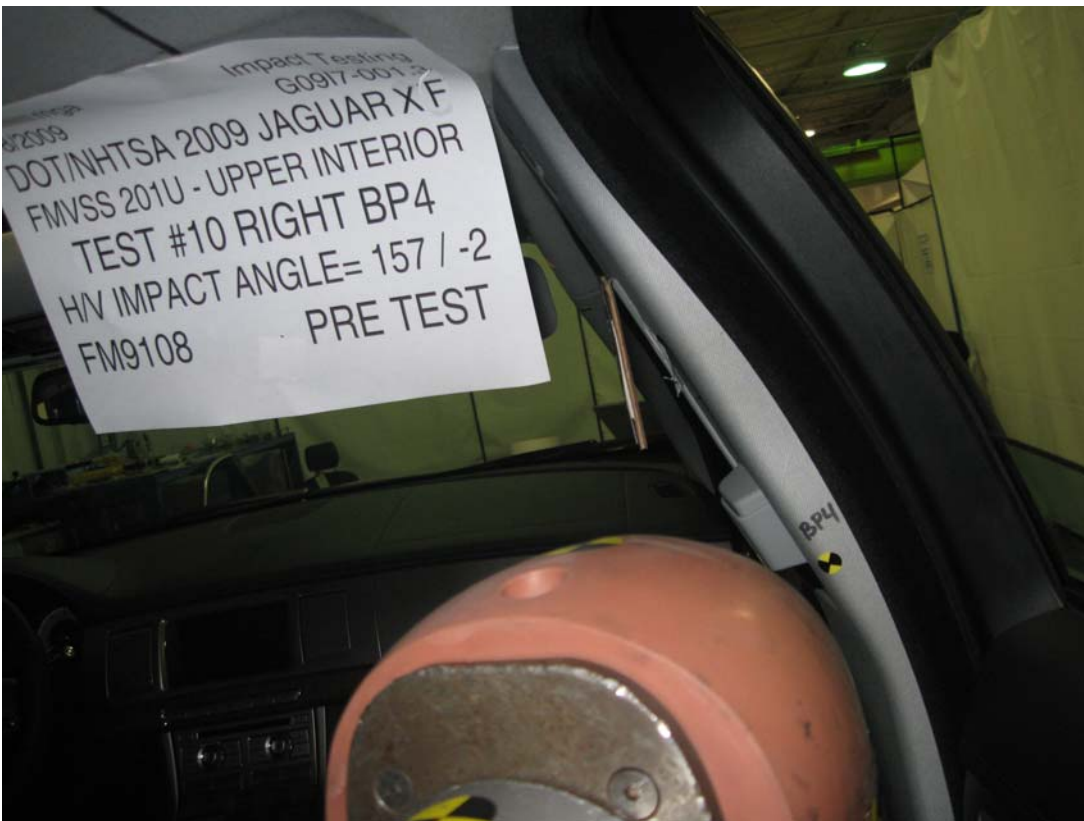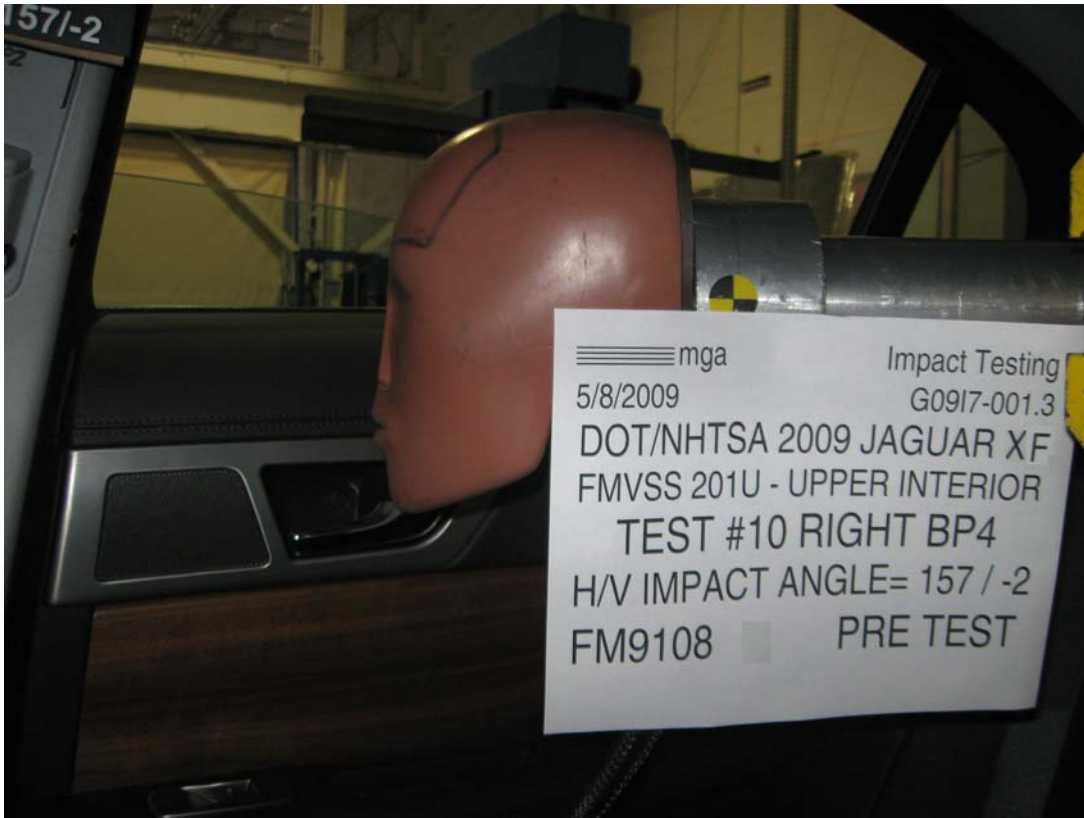

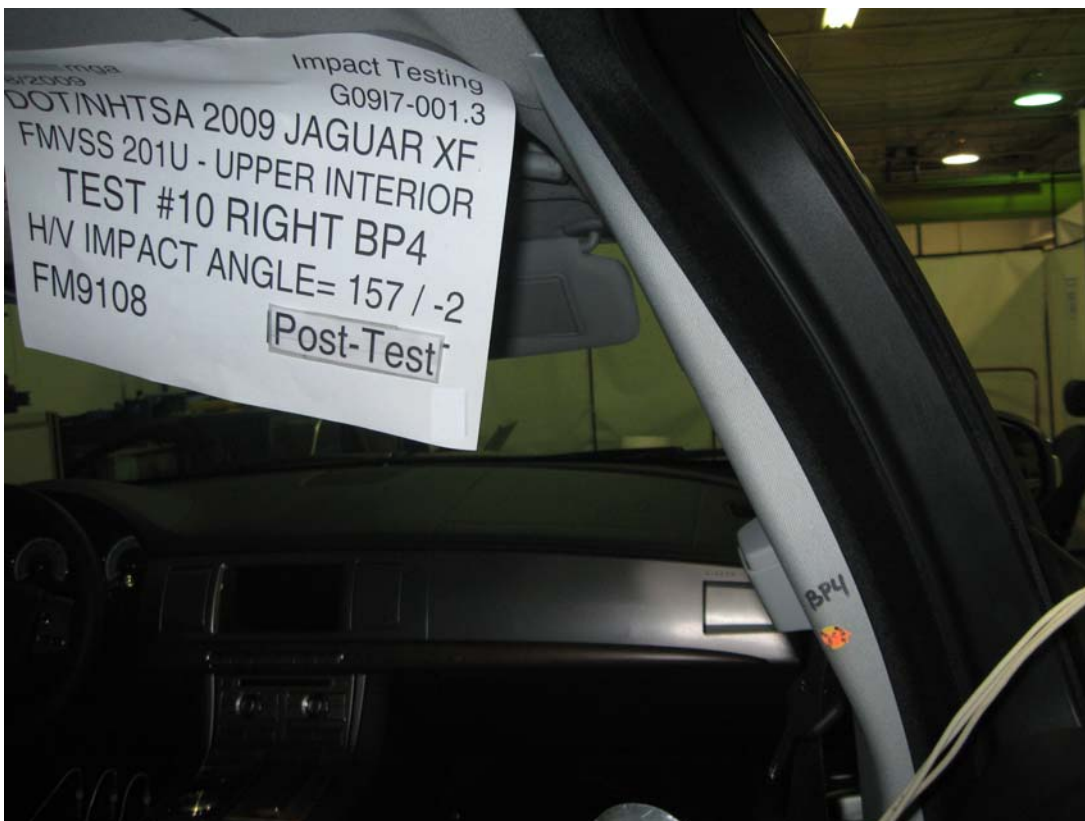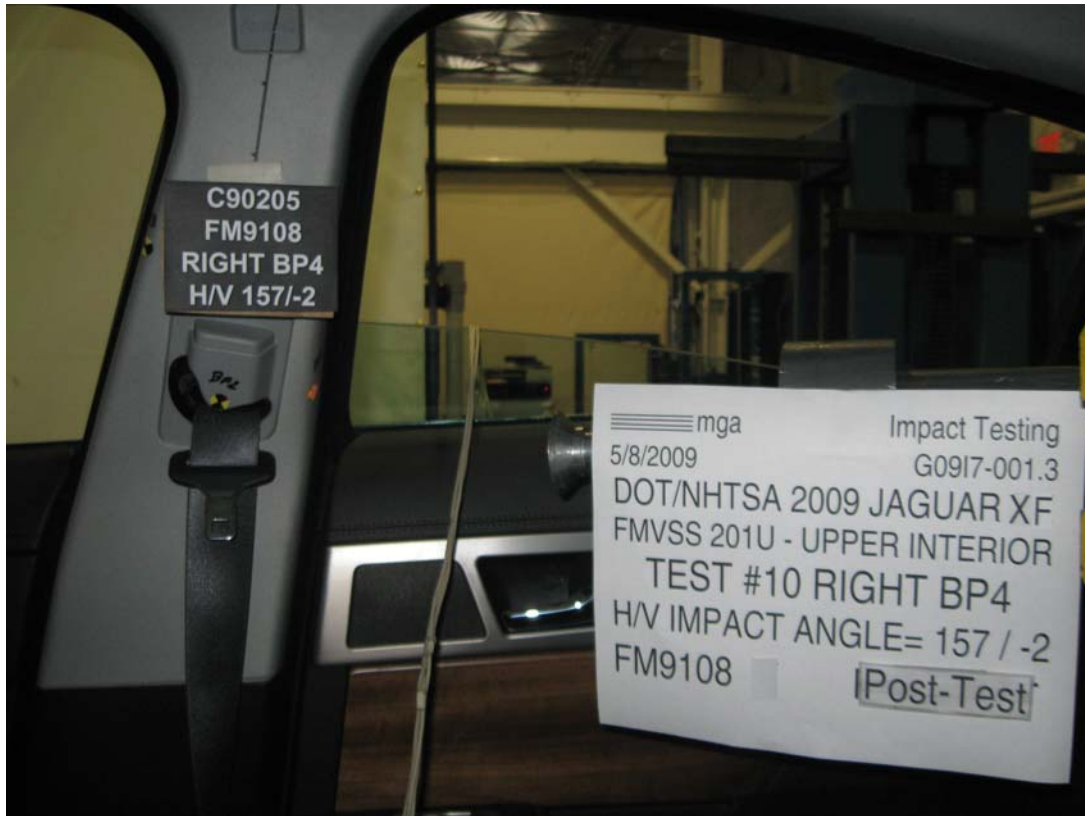



SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Target (Vehicle Side): BP4Right

MGA Test Reference No.:FM9108

Approach Horizontal Angles:157°

Approach Vertical Angles:-2°

Additional Description:adjuster full down

Test Number:#10

Temperature:20.7C

Humidity:56.6%

Time of Test:2:30:43 PM

FMH Serial No:[035]

TEST RESULTS:

HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
645	635	4.6	23.9	20	1 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J35919	-95.6	1.05	1.05
Y	6	J22664	94.3	0.84	0.84
Z	7	J35924	92.8	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):

No damage observed



Recorded By:  Approved By*:  Date: 5/8/2009



*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9108


Target Location: BP4, Right Side



Test Date: 5/8/2009

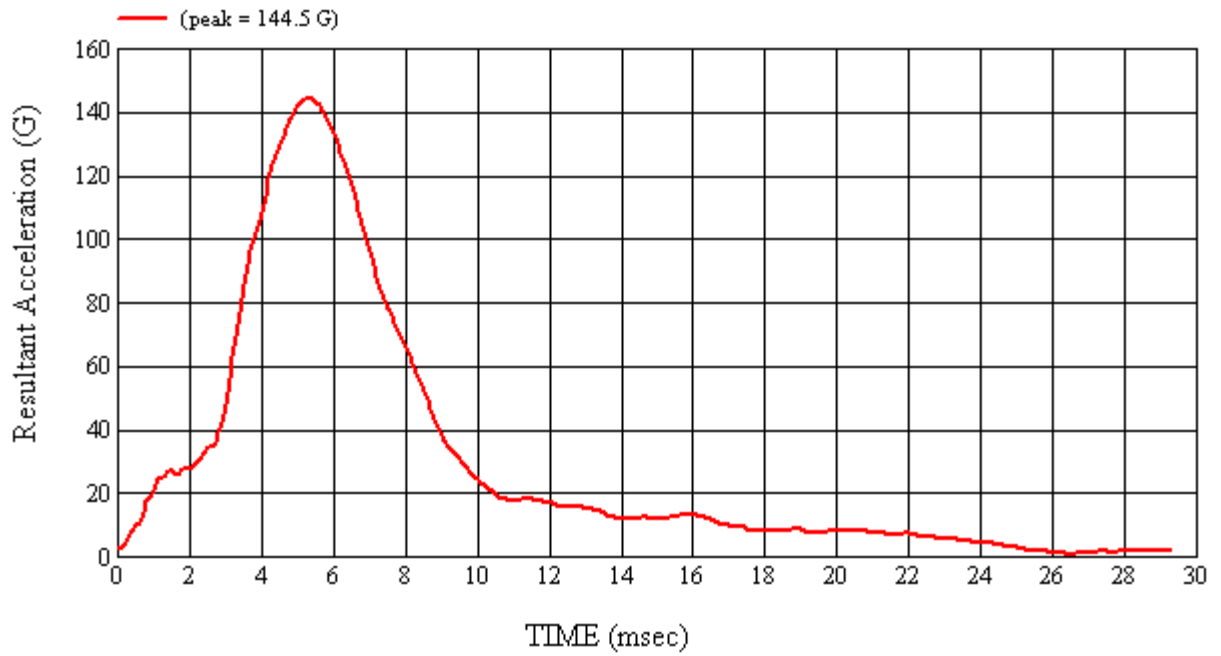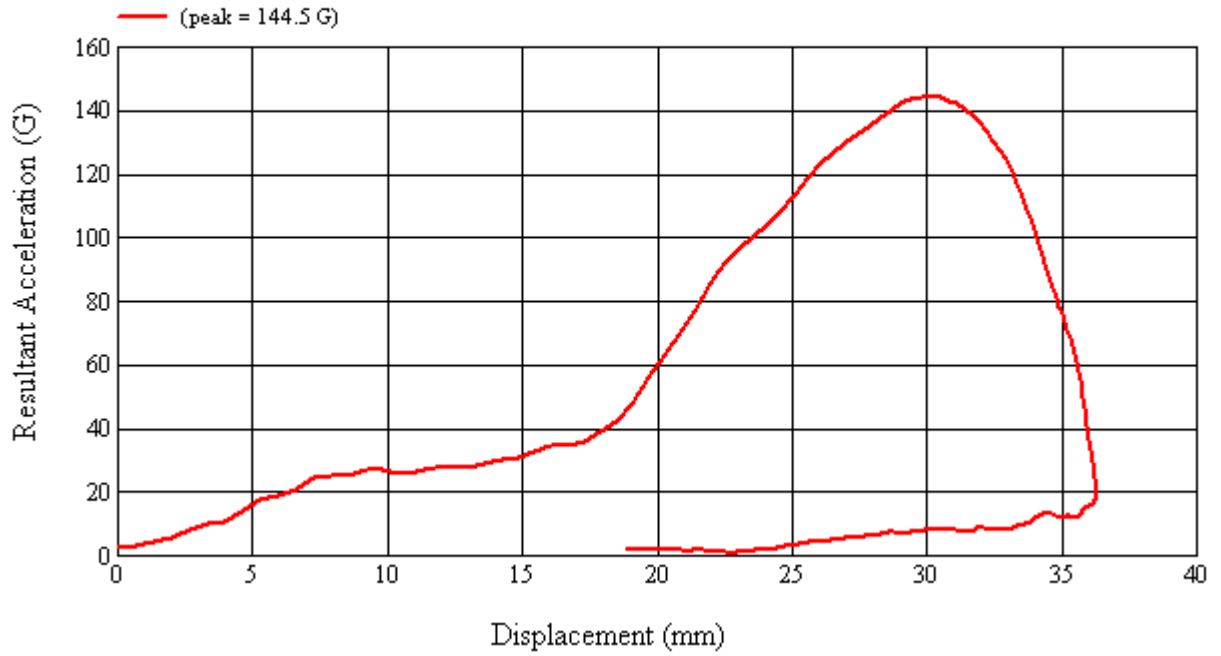


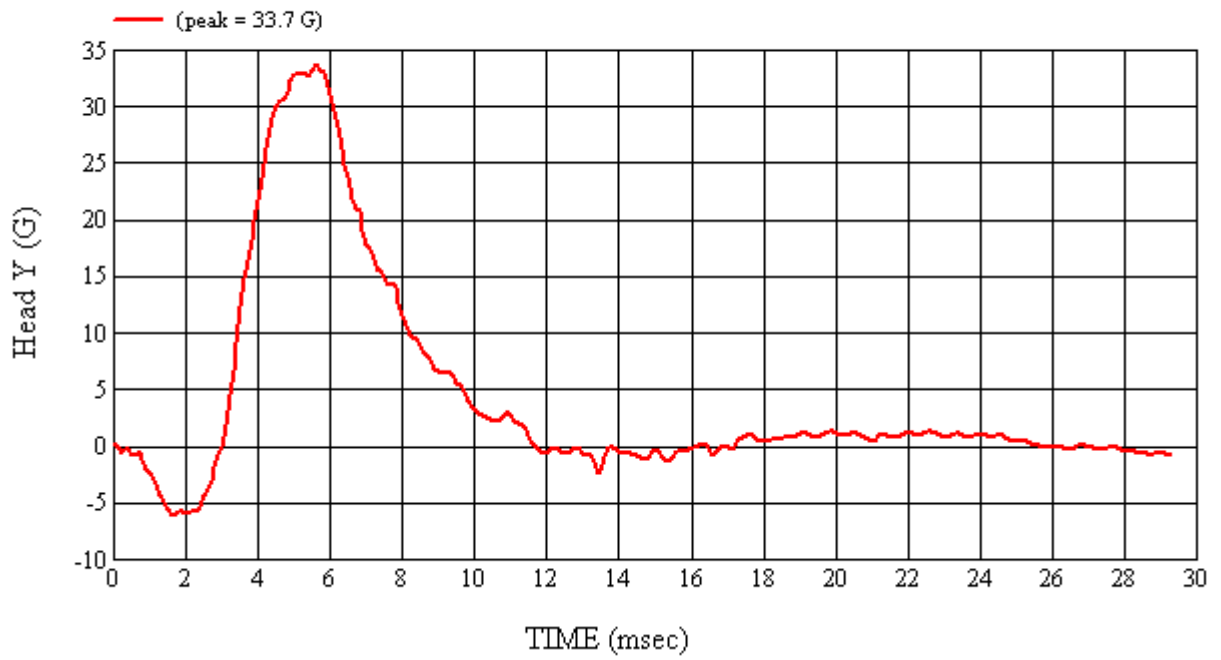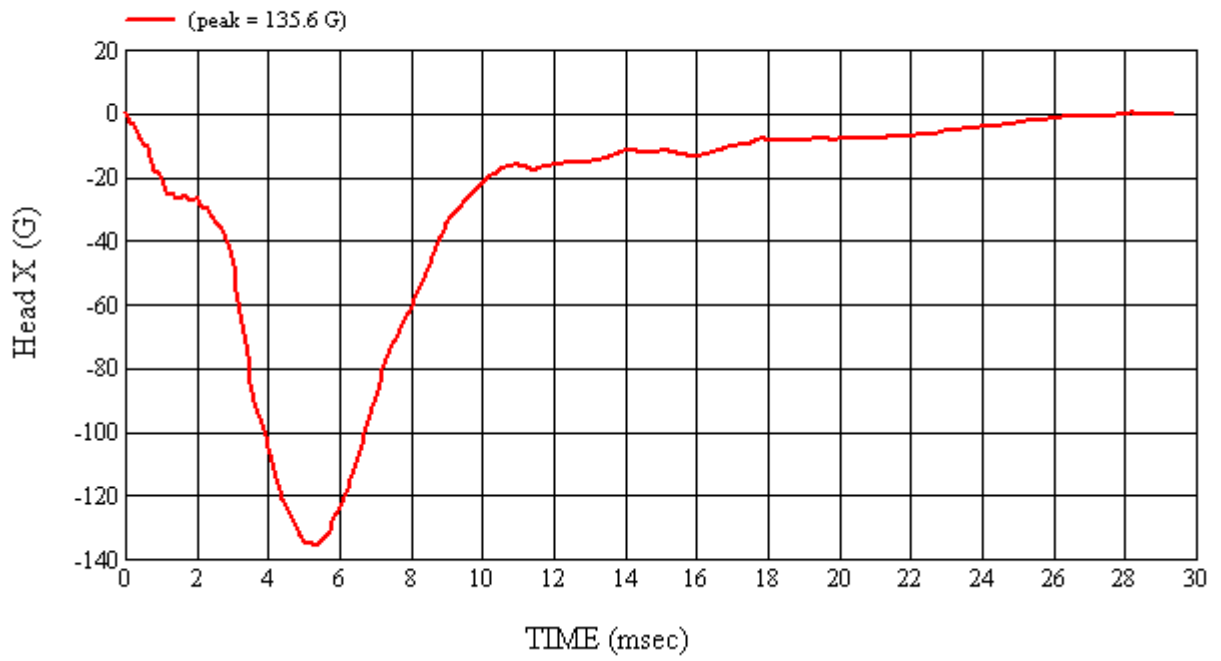

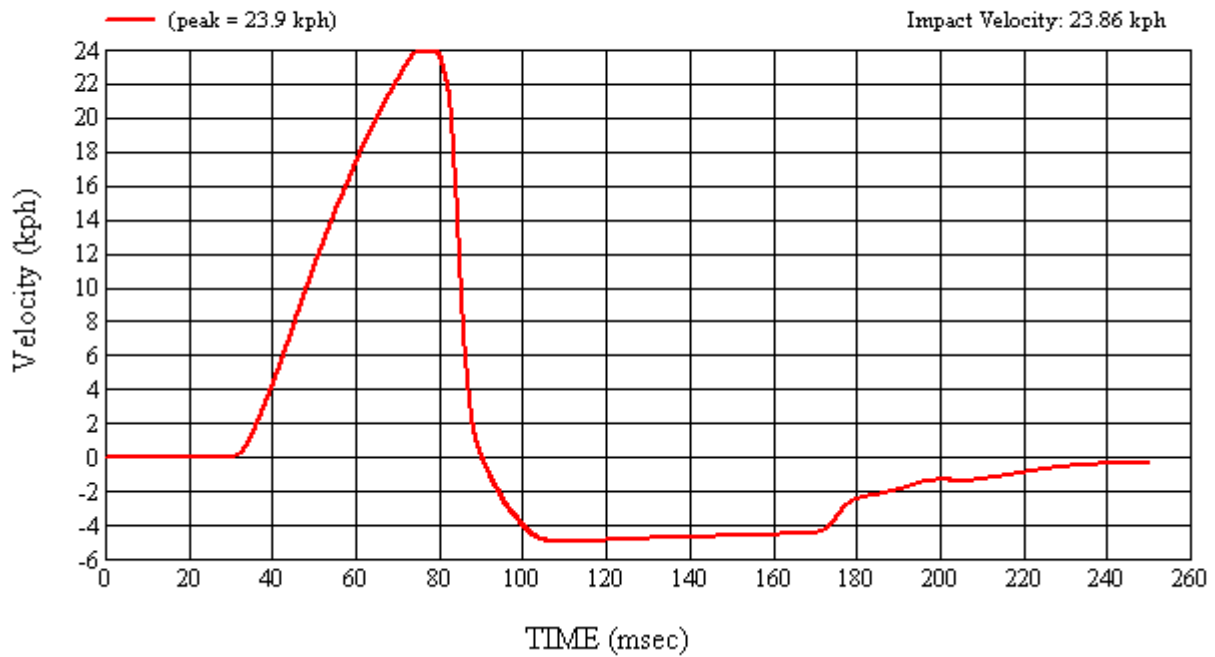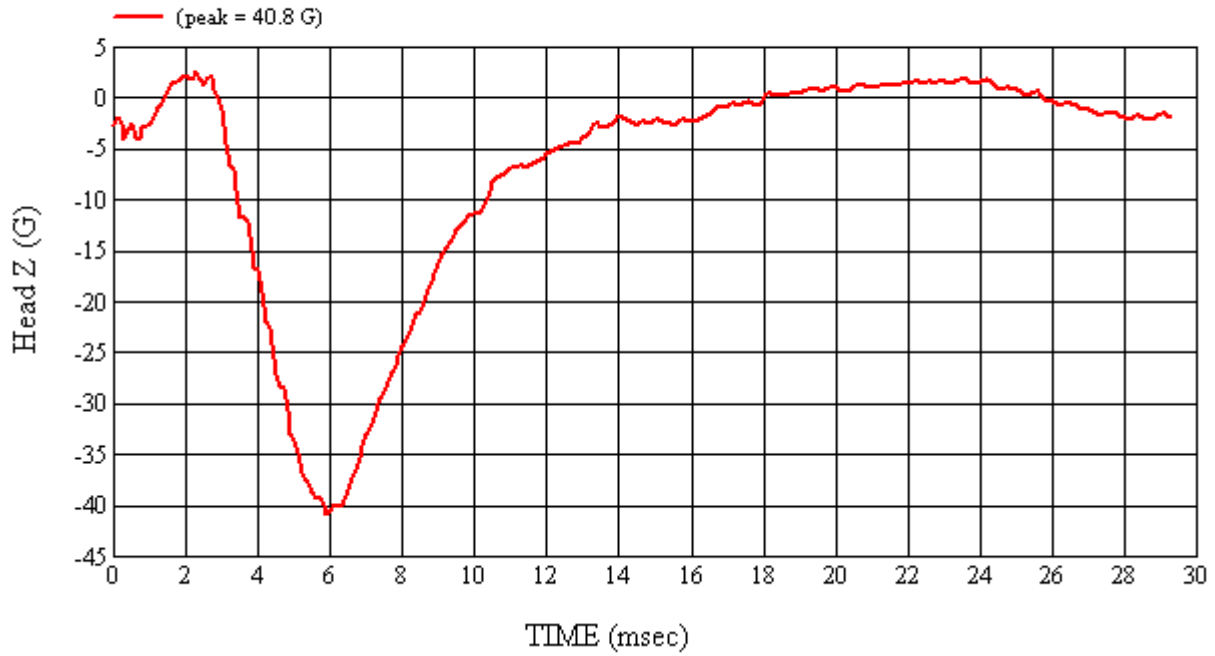

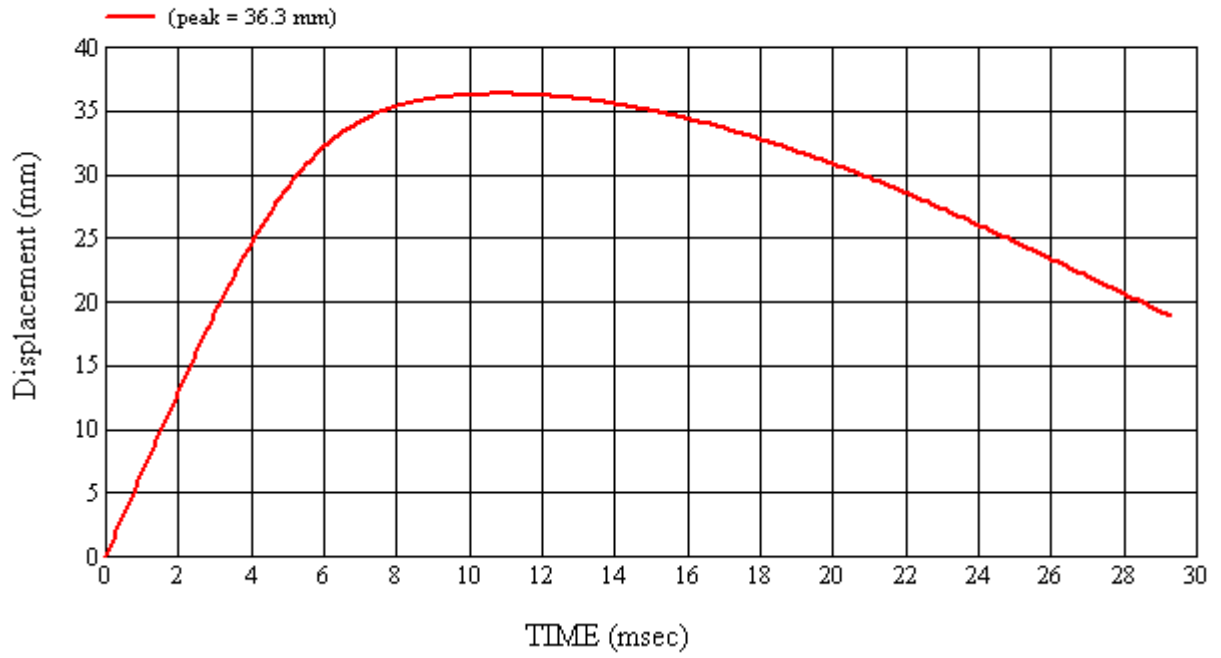

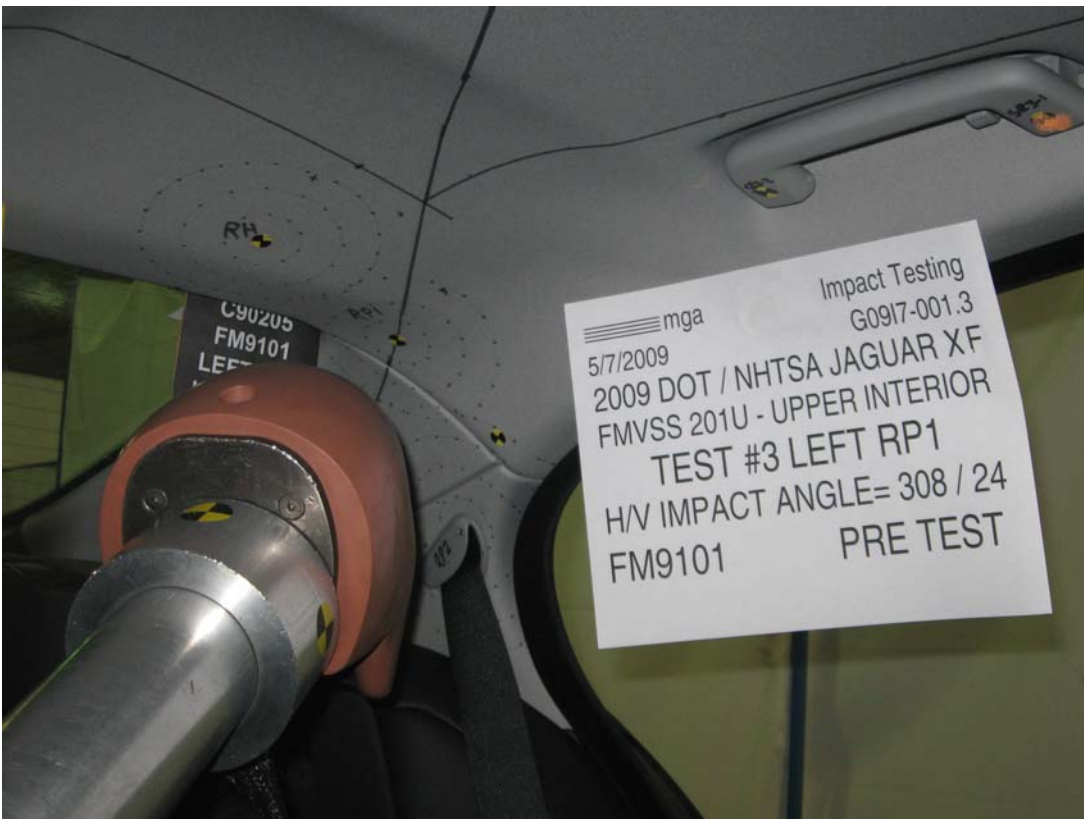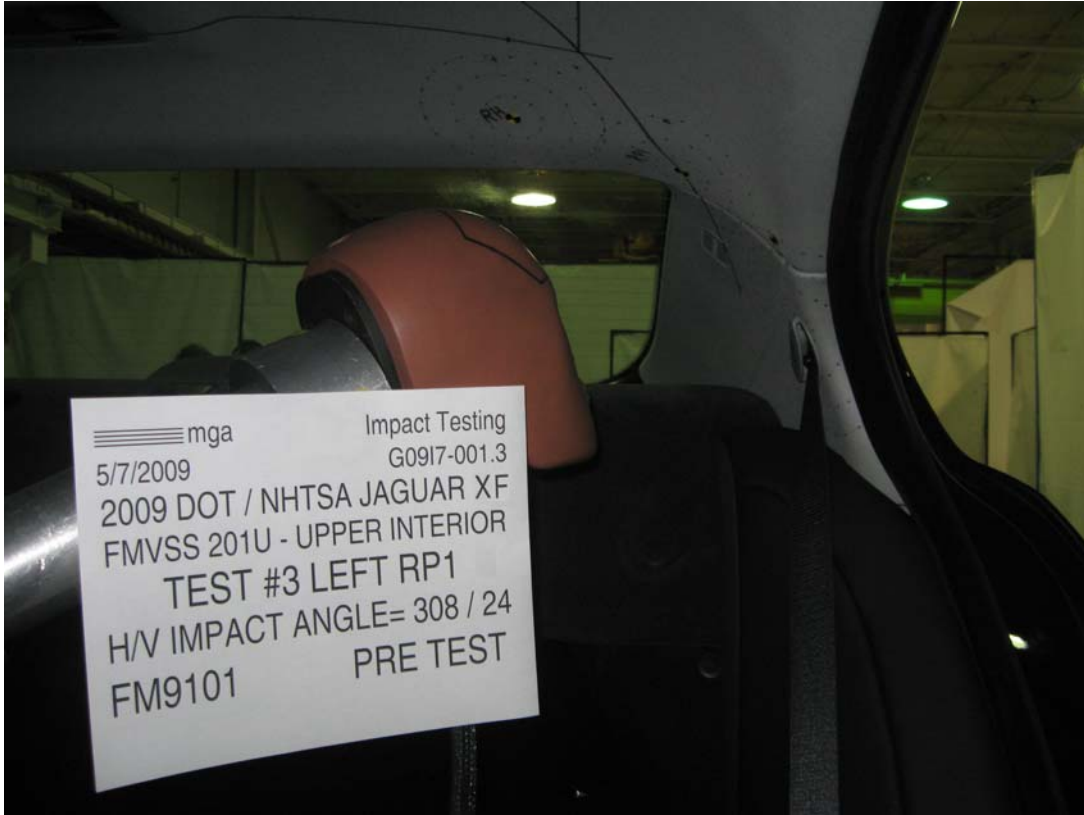

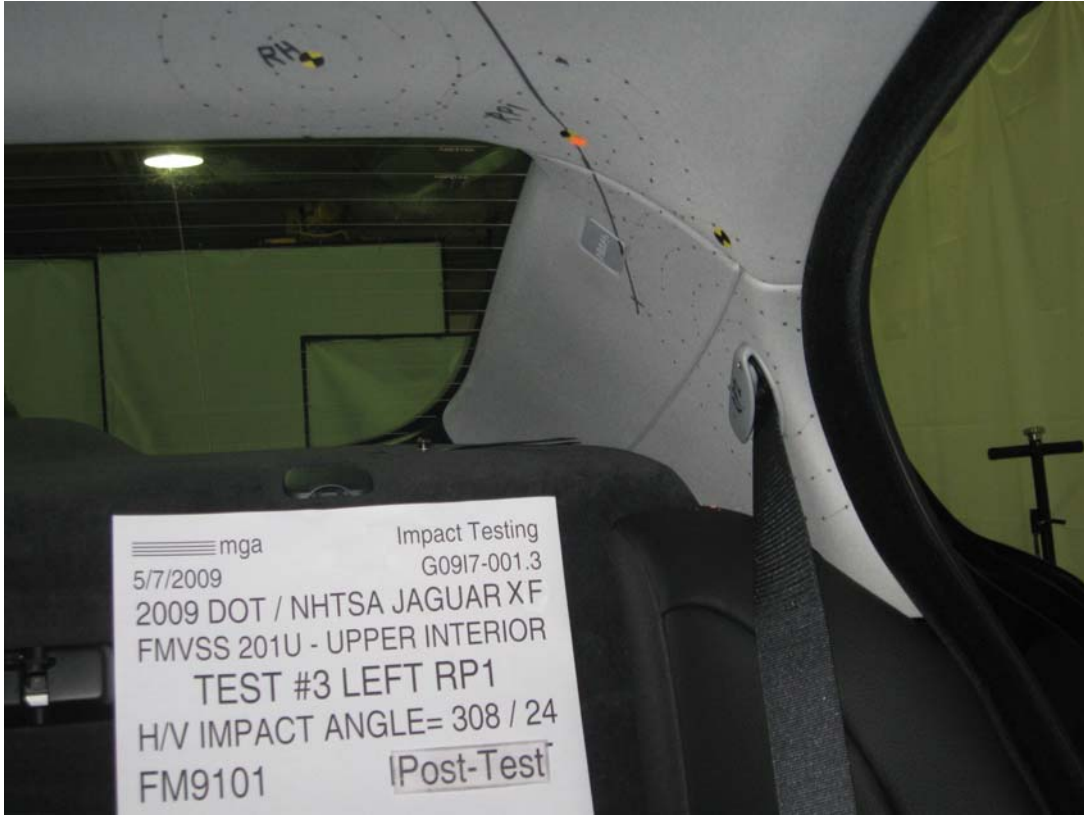



SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number:#3

Target (Vehicle Side): RP1Left

Temperature:21.1C

MGA Test Reference No.:FM9101

Humidity:56.5%

Approach Horizontal Angles:308°

Time of Test:1:33:56 PM

Approach Vertical Angles:24°

FMH Serial No:[038]

Additional Description:

TEST RESULTS:

HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
721	734	7.3	23.6	42	4 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J22700	-94	1.06	1.06
Y	6	J36197	106.3	0.85	0.85
Z	7	J36353	97.5	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):

No visible damage.





Recorded By: _____ Approved By*: Heena Kalita Date: 5/7/2009



*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9101


Target Location: RPI, Left Side

Test Date: 5/7/2009

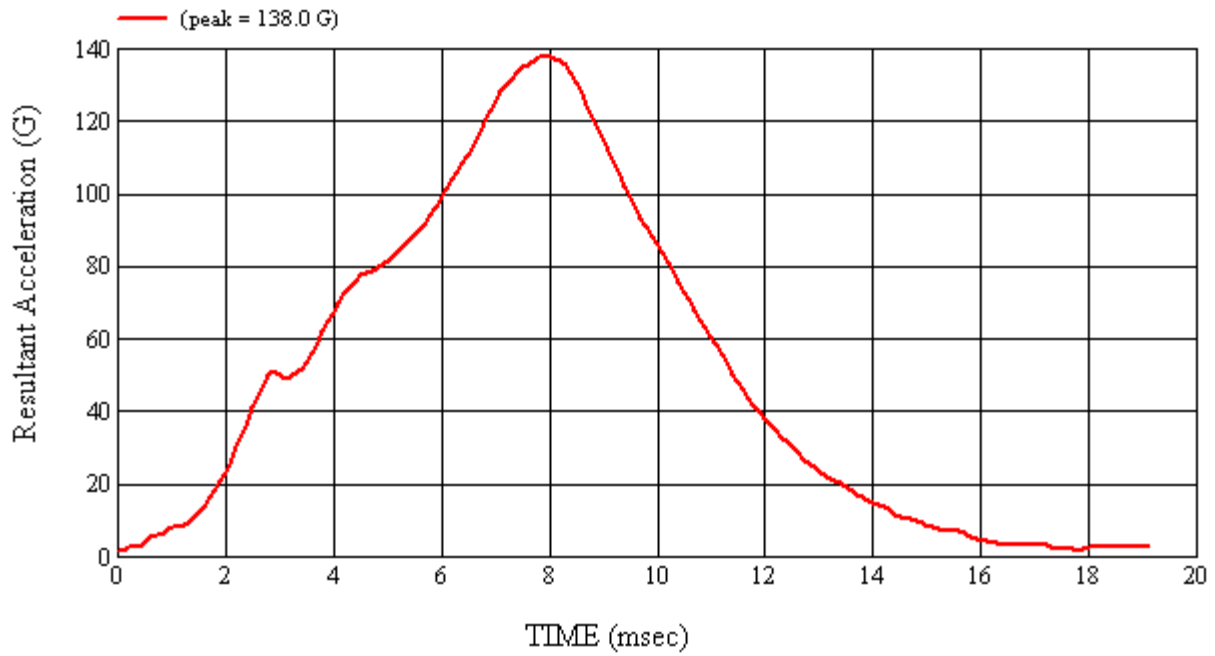
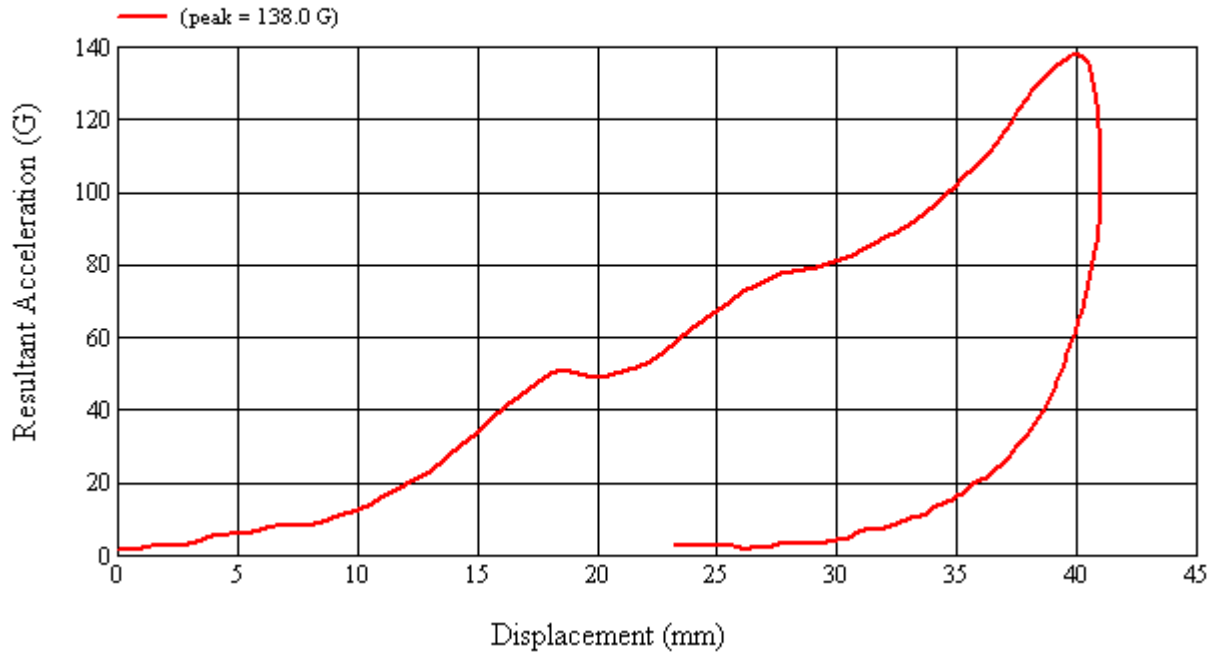


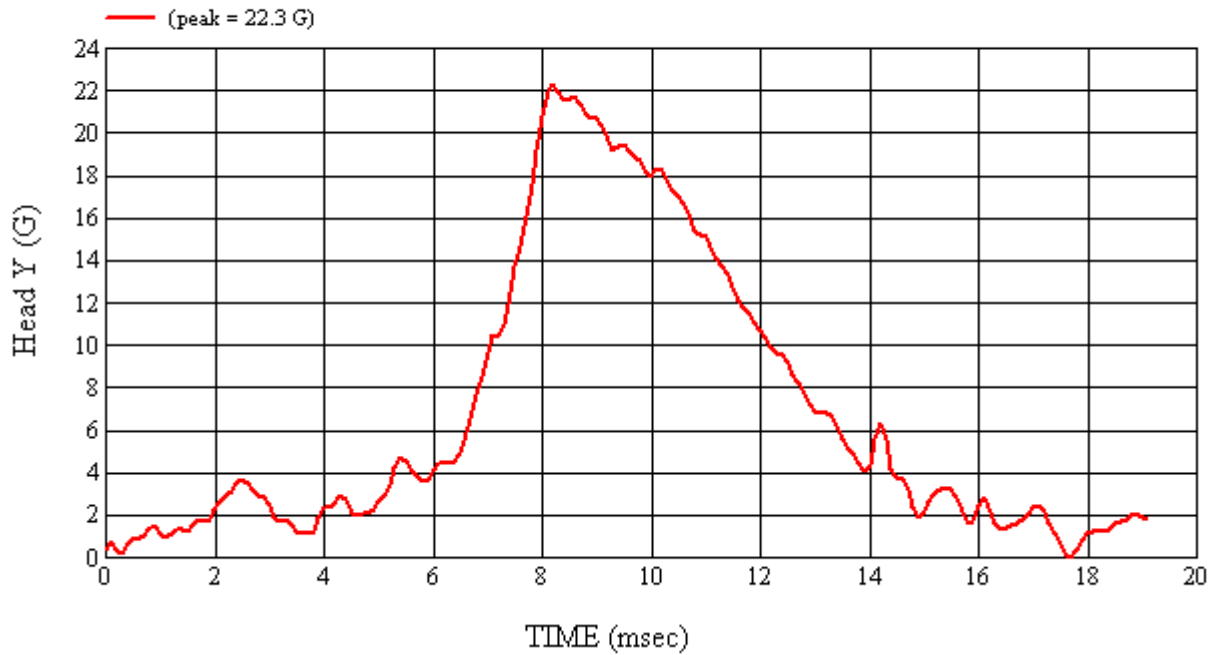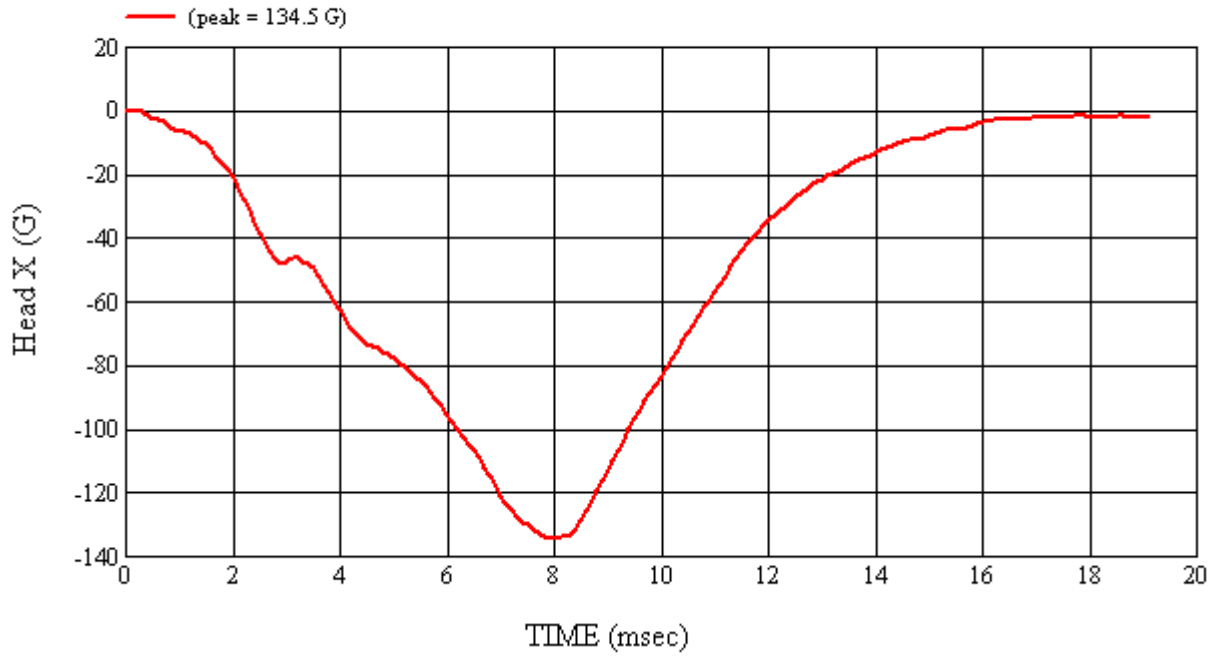

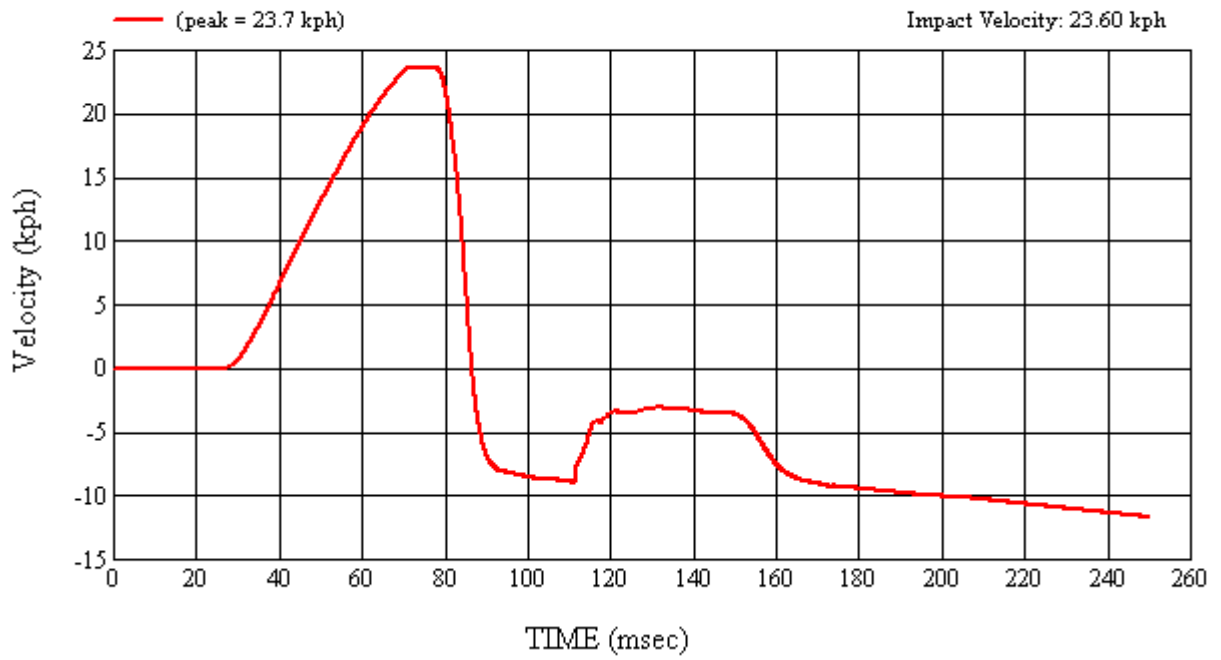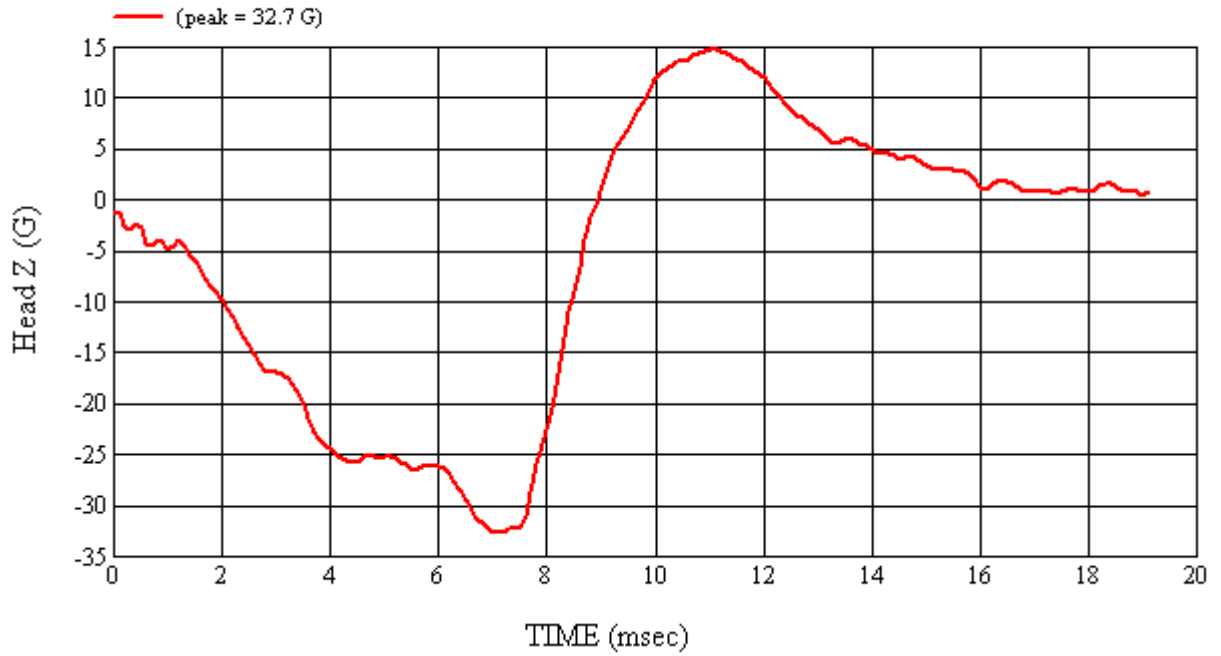

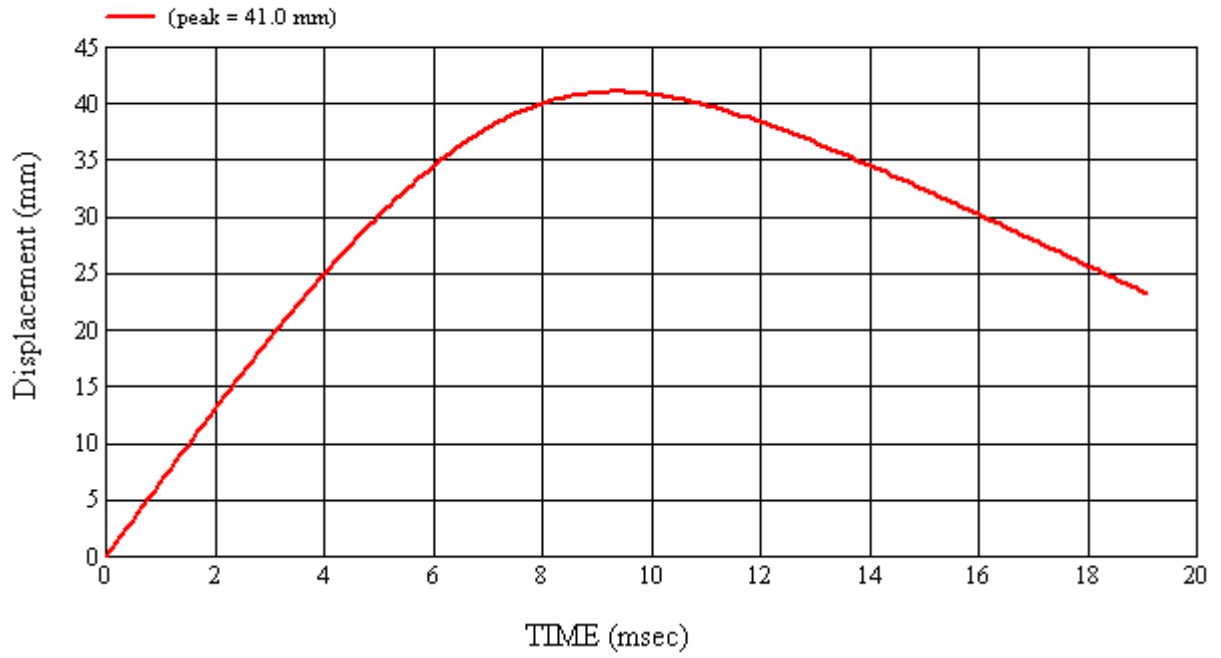



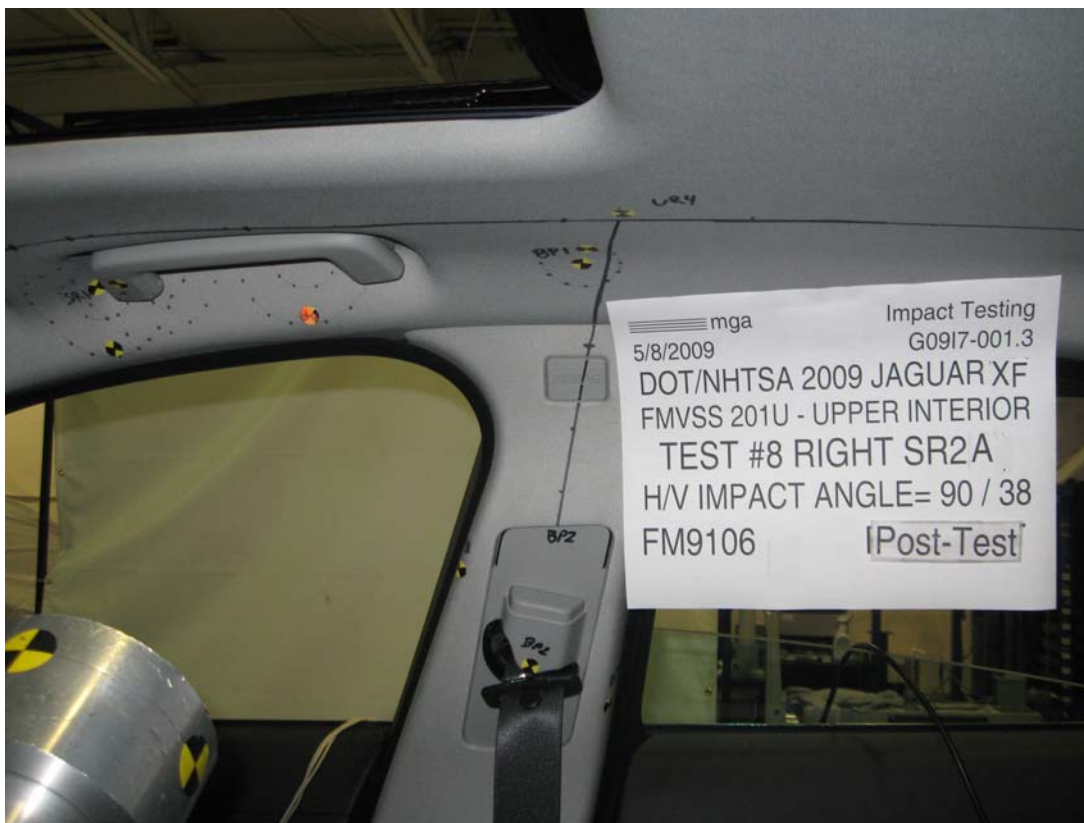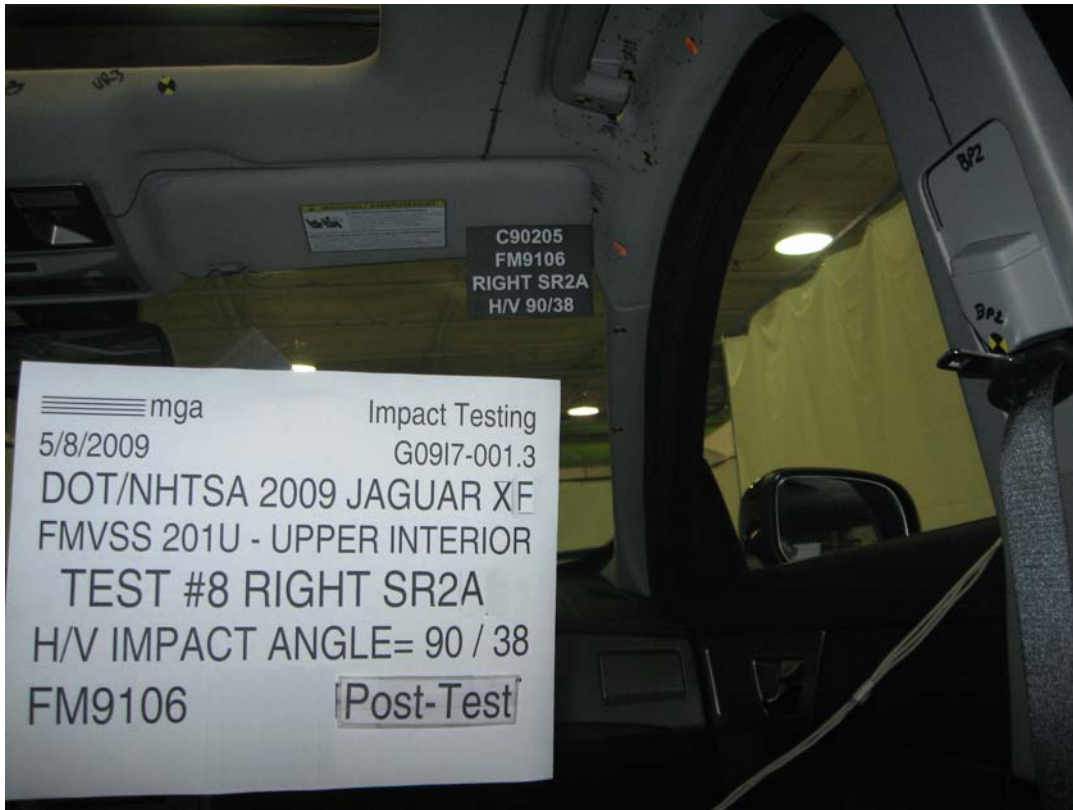



SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Target (Vehicle Side): SR2(a)Right

MGA Test Reference No.:FM9106

Approach Horizontal Angles:90°

Approach Vertical Angles:38°

Additional Description:Relocation Spheres: 2

Test Number:#8

Temperature:20.9C

Humidity:60.0%

Time of Test:11:06:53 AM

FMH Serial No:[037]

TEST RESULTS:

HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
534	488	4.3	19.0	29	9 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	AHTB2	-115.9	1.05	1.05
Y	6	J14103	93.7	0.84	0.84
Z	7	J35800	97.1	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):

No damage observed



Recorded By:  Approved By*:  Date: 5/8/2009



*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9106


Target Location: SR2(a), Right Side

Test Date: 5/8/2009

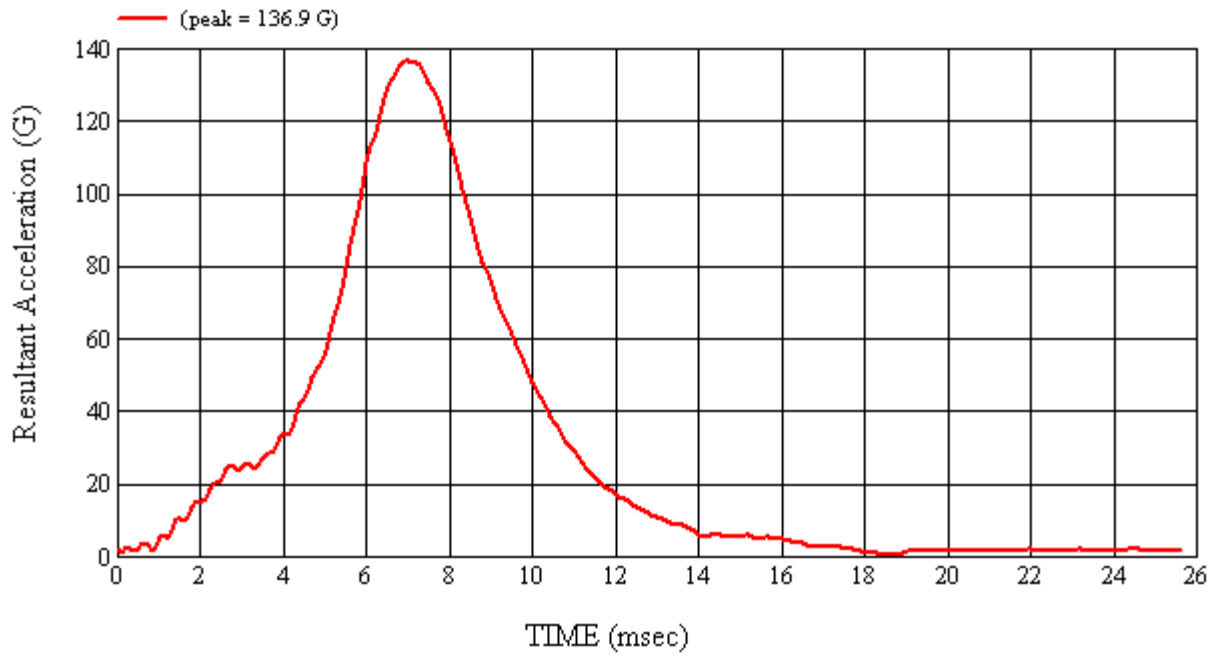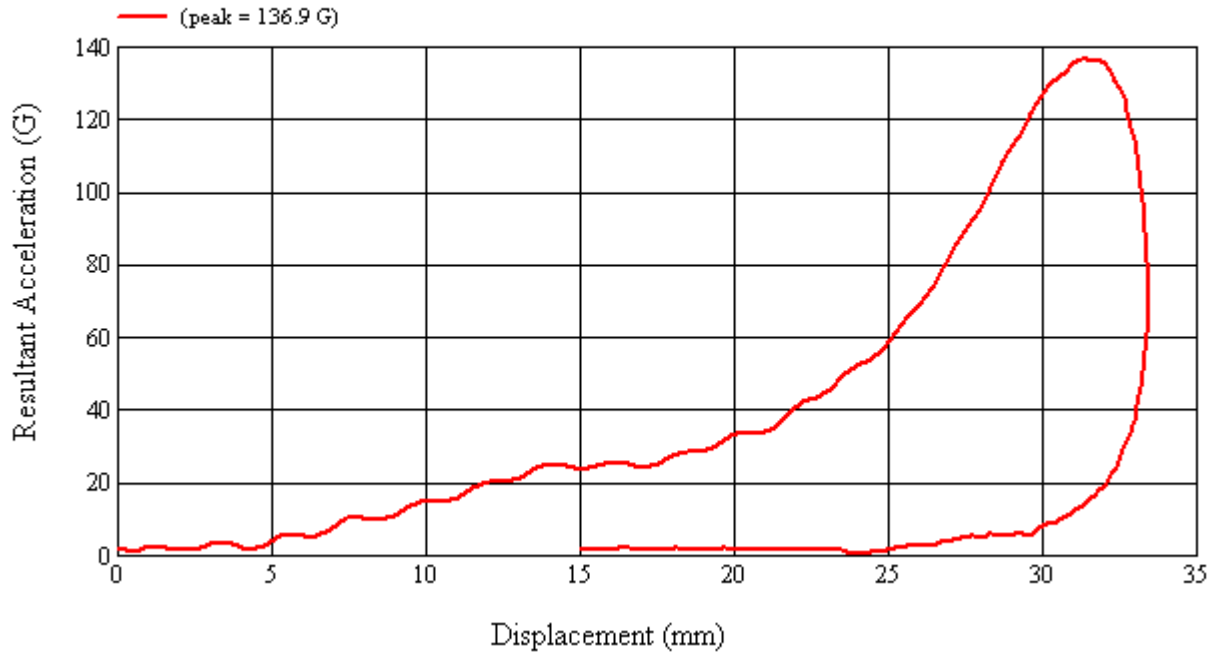


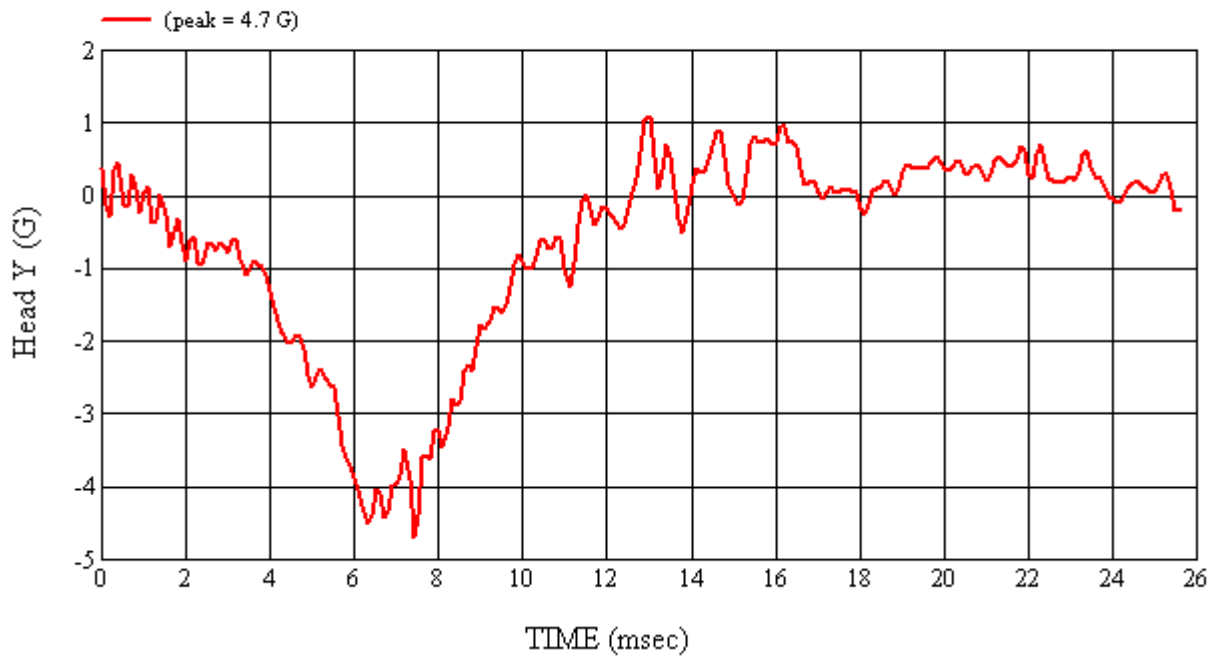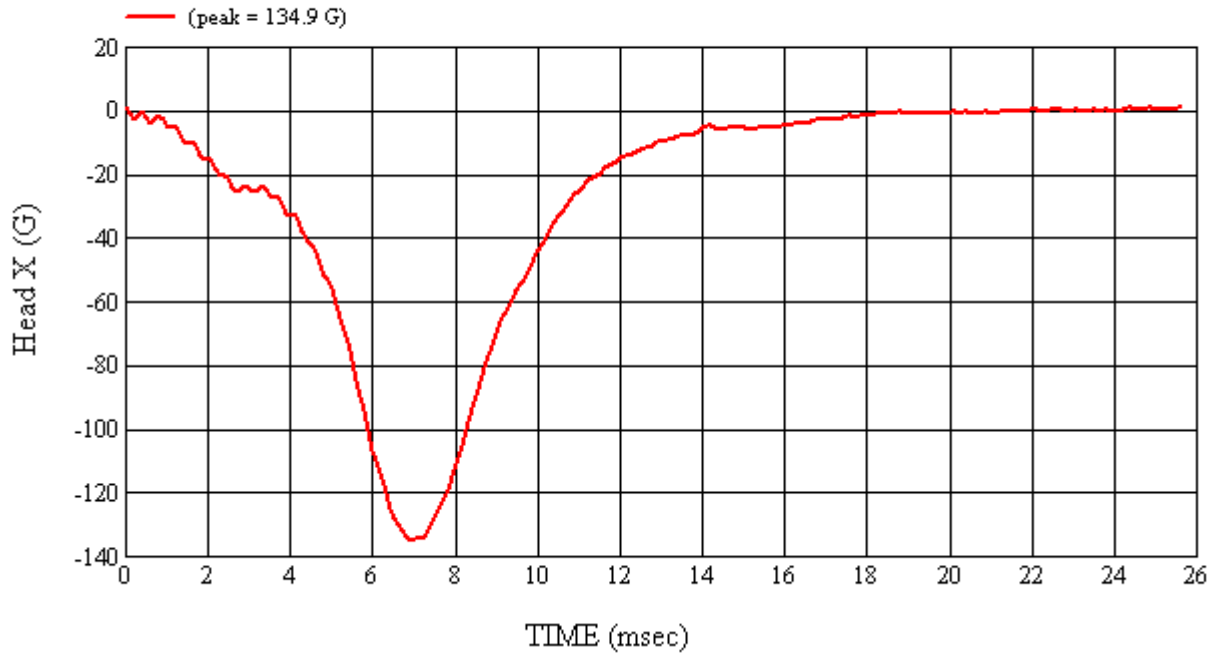

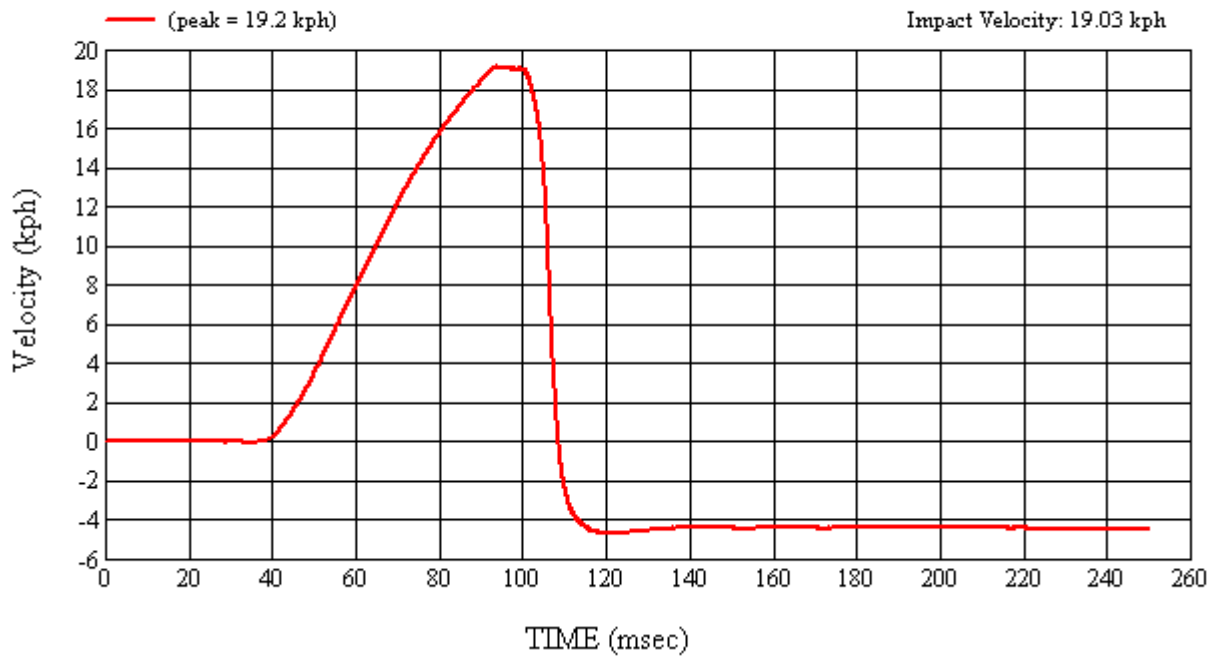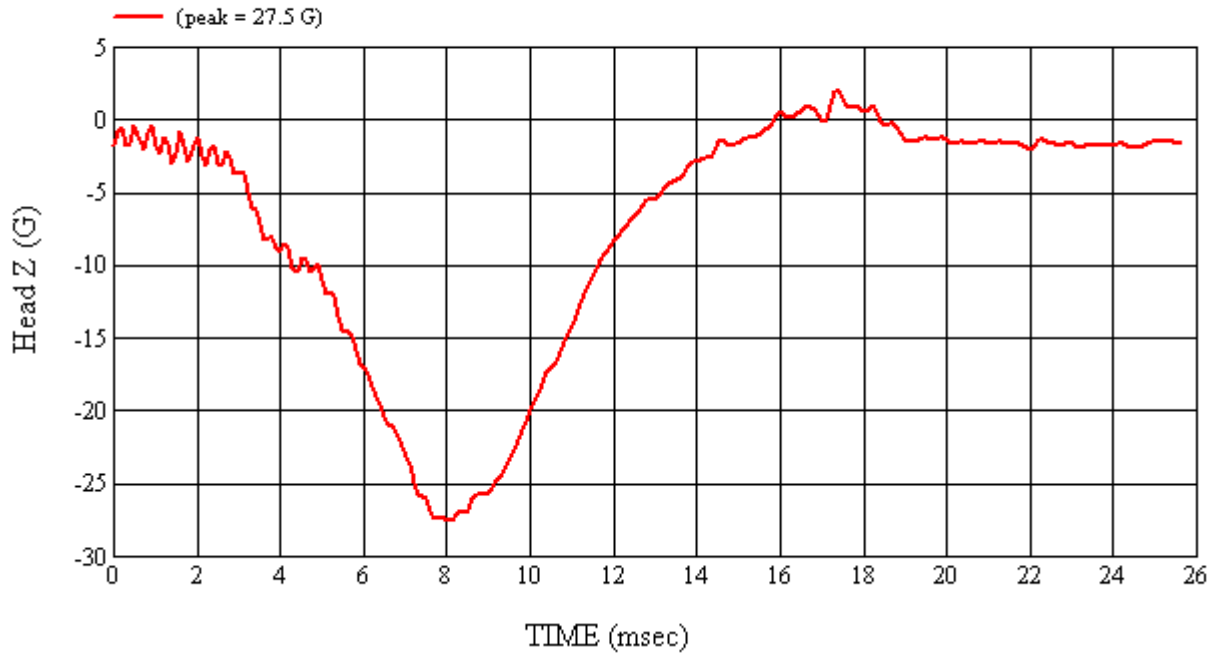

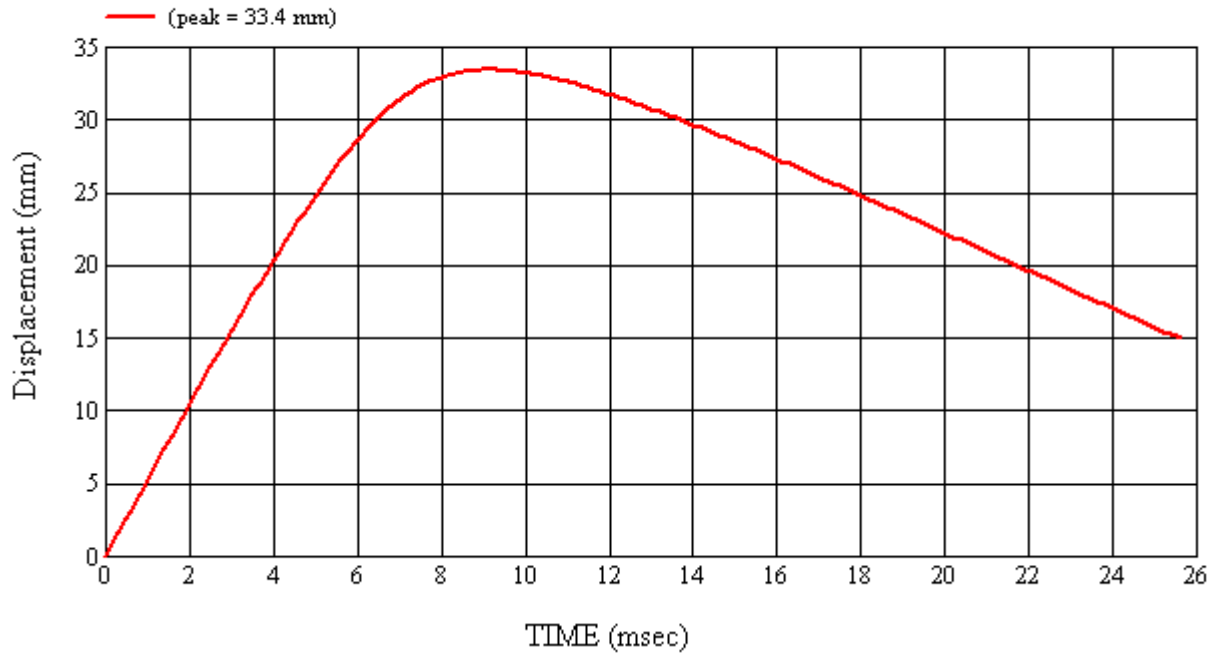



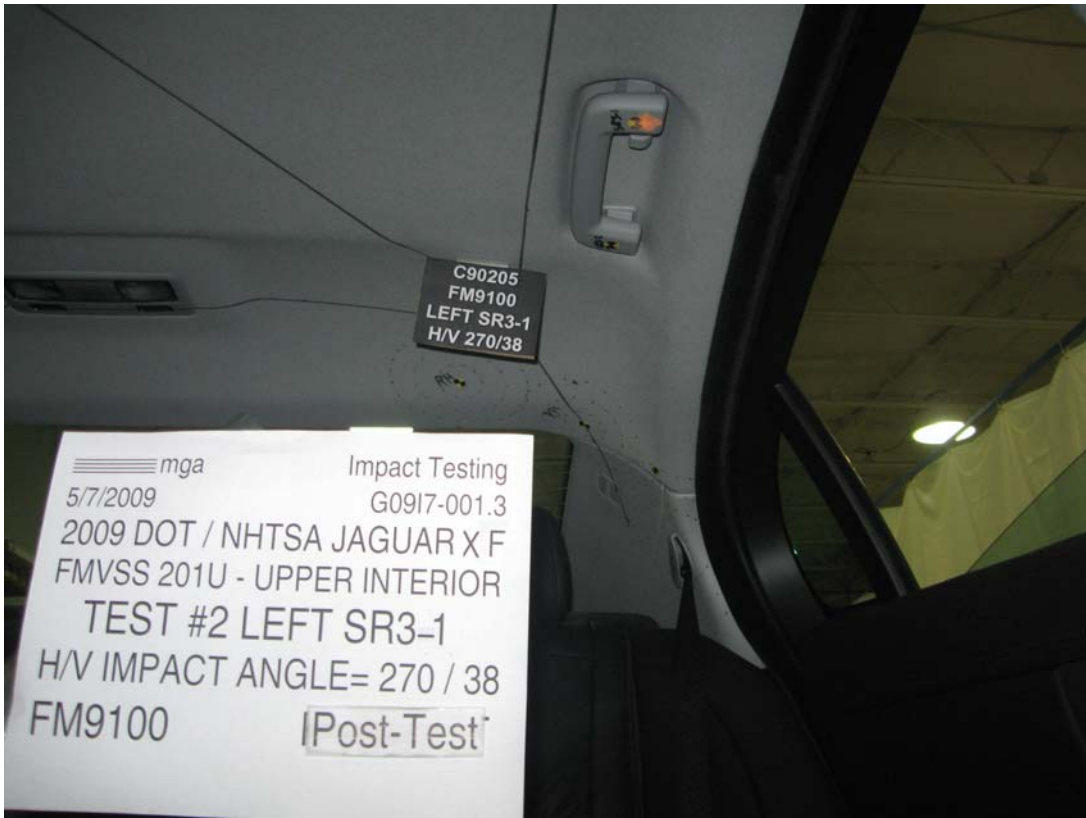



SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Target (Vehicle Side): SR3-1 Left

MGA Test Reference No.:FM9100

Approach Horizontal Angles:270°

Approach Vertical Angles:38°

Additional Description:

Test Number:#2

Temperature:21.1C

Humidity:58.0%

Time of Test:12:02:37 PM

FMH Serial No:[037]

TEST RESULTS:



HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
698	704	9	24.1	16	1 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	AHTB2	-115.9	1.06	1.06
Y	6	J14103	93.7	0.84	0.85
Z	7	J35800	97.1	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):



Headliner fastener protrusion visible on the vehicle body exterior roof.



Recorded By:  Approved By*:  Date: 5/7/2009
 *Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9100


Target Location: SR3-1, Left Side


Test Date: 5/7/2009

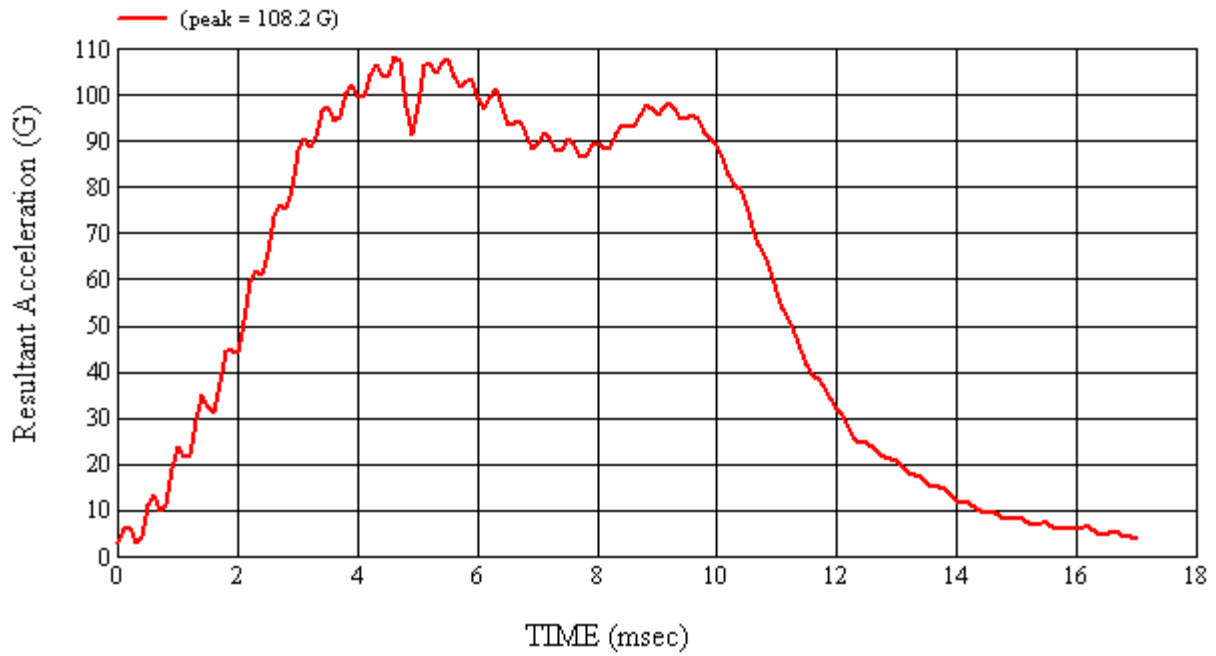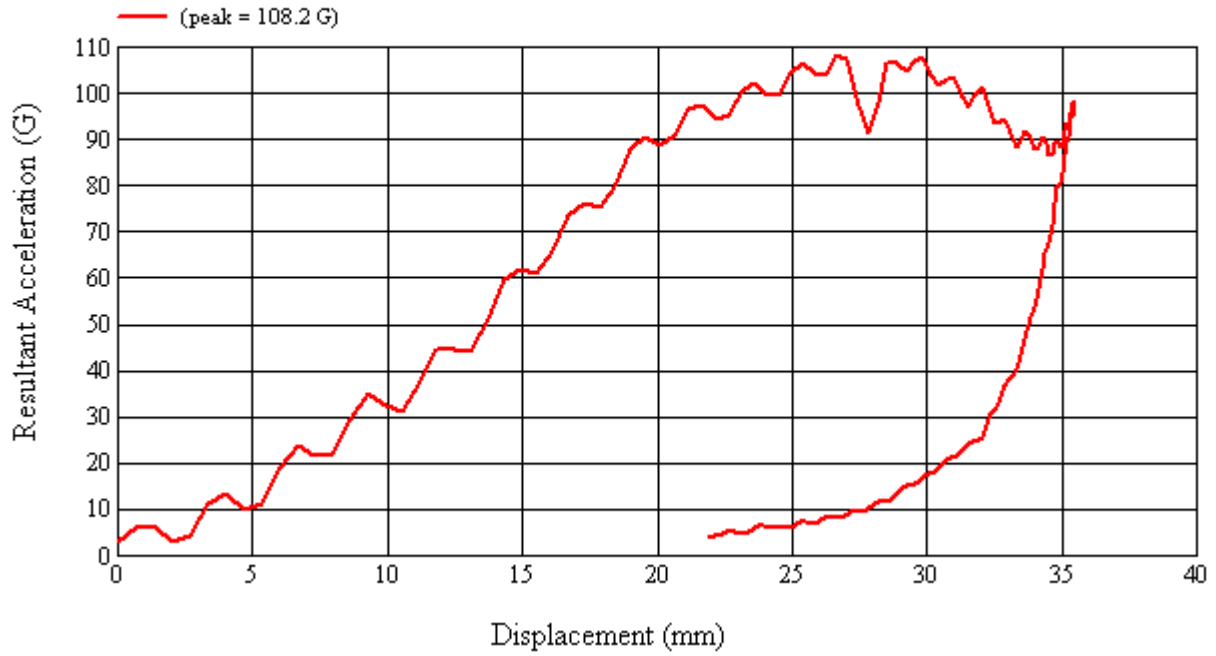


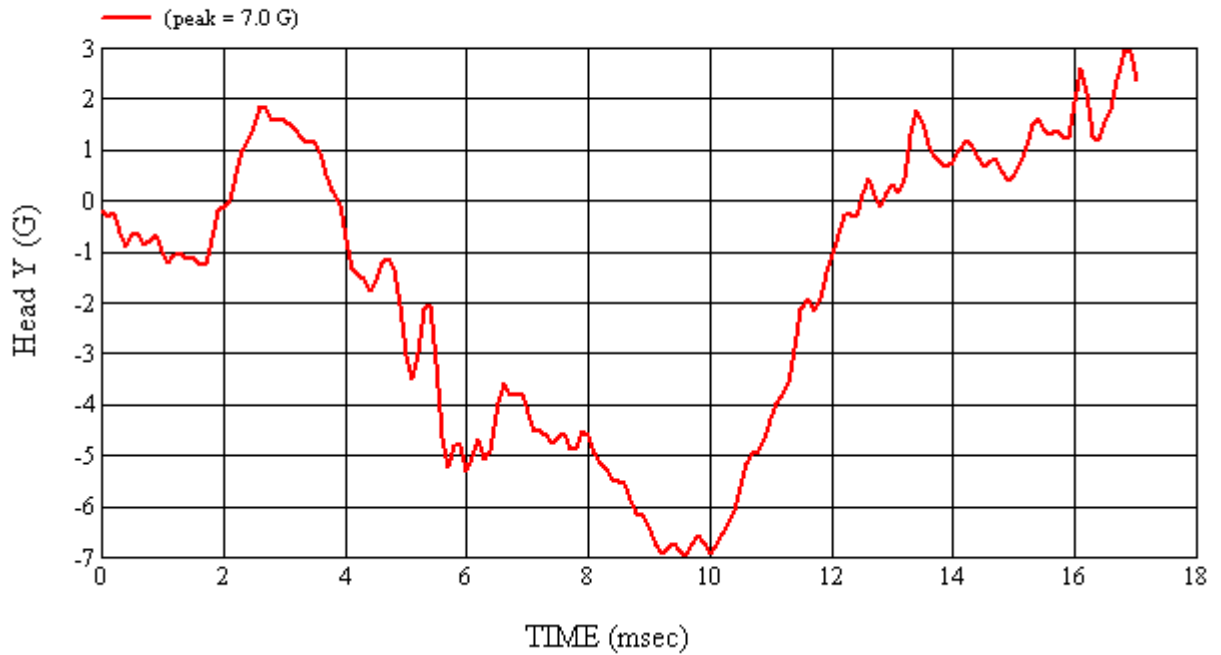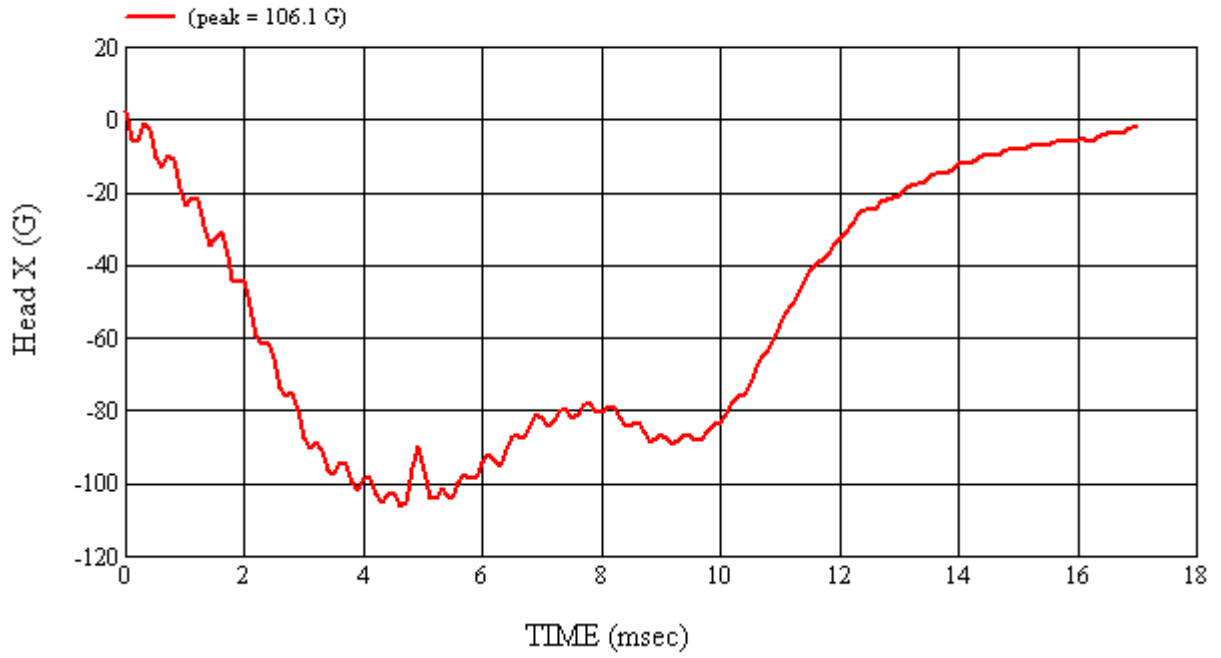


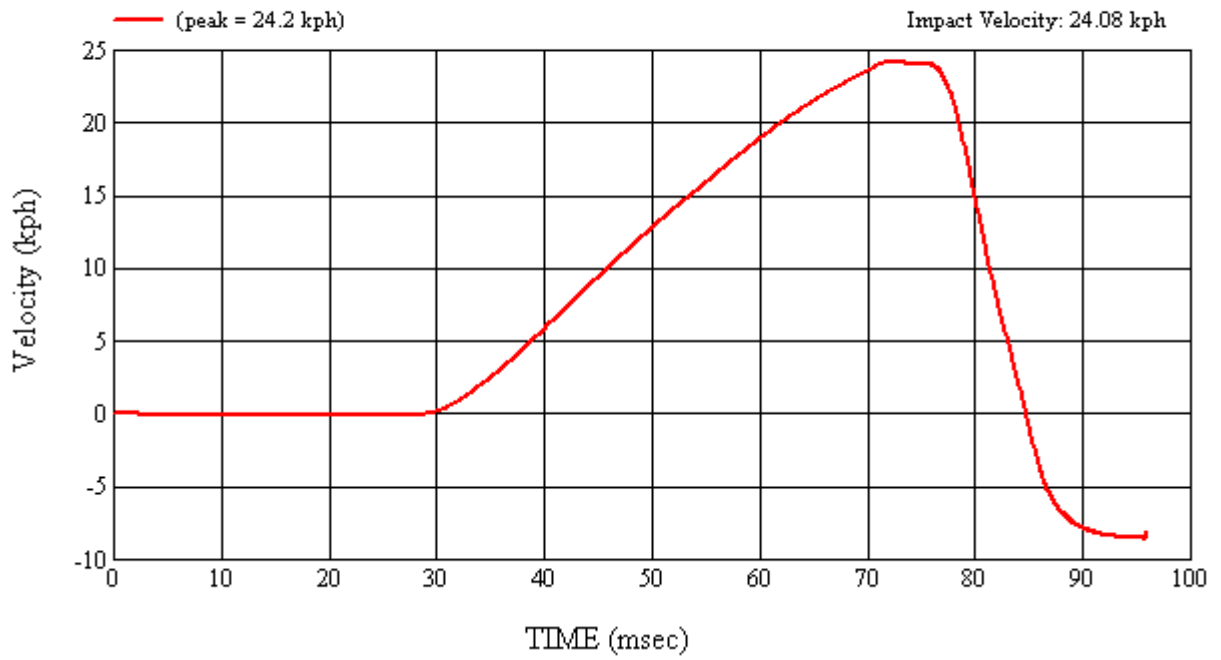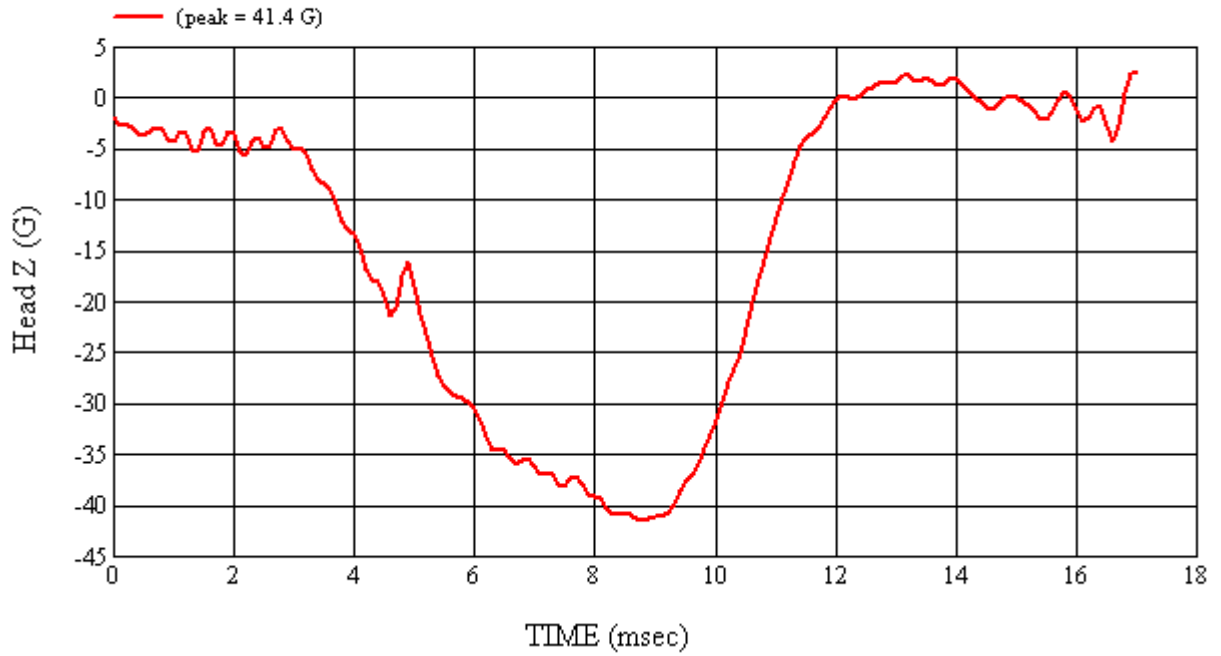

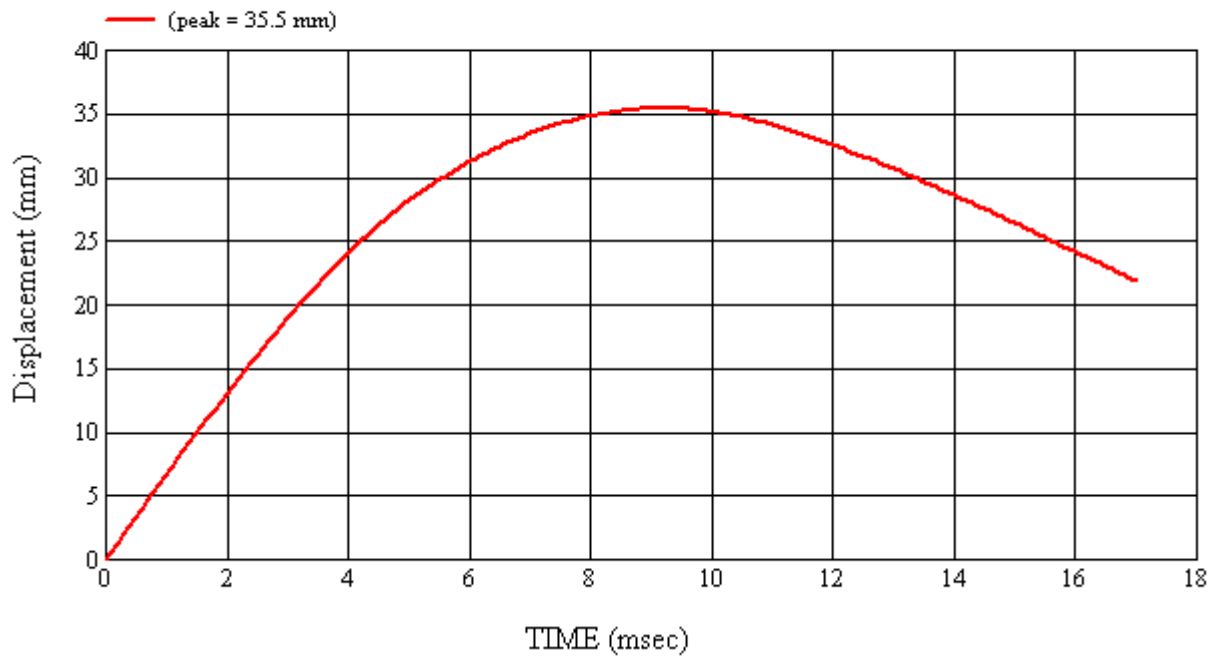

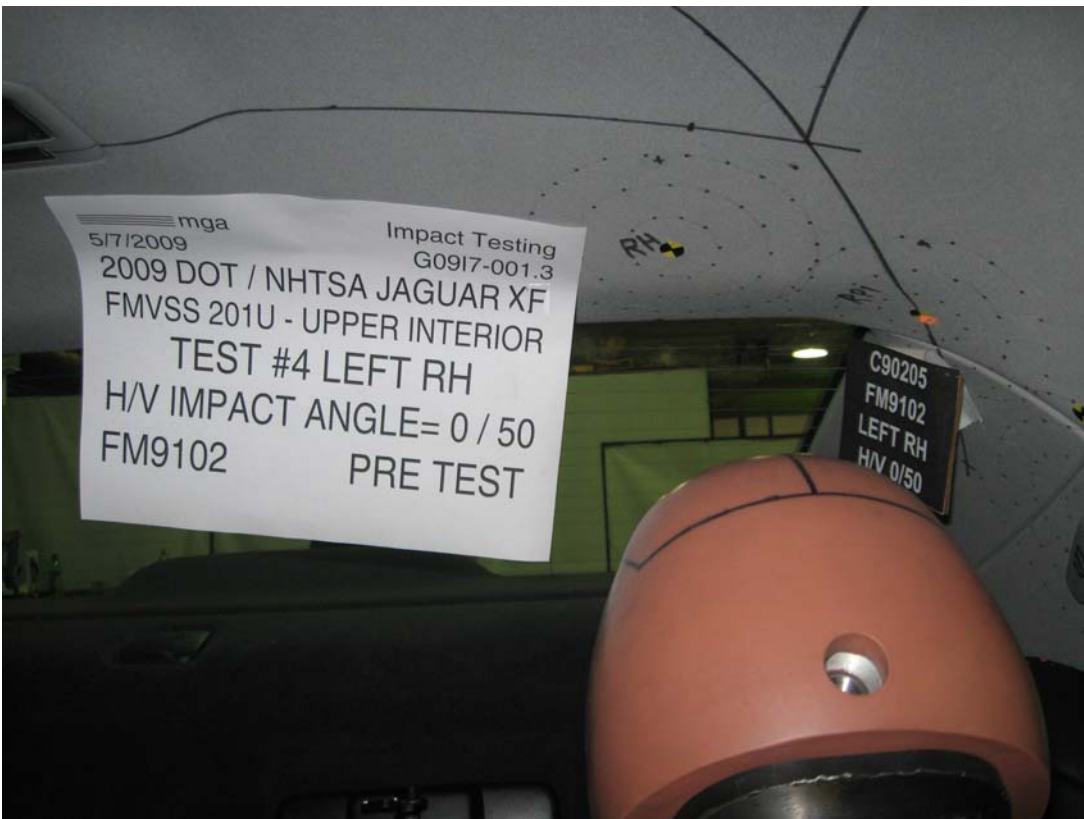

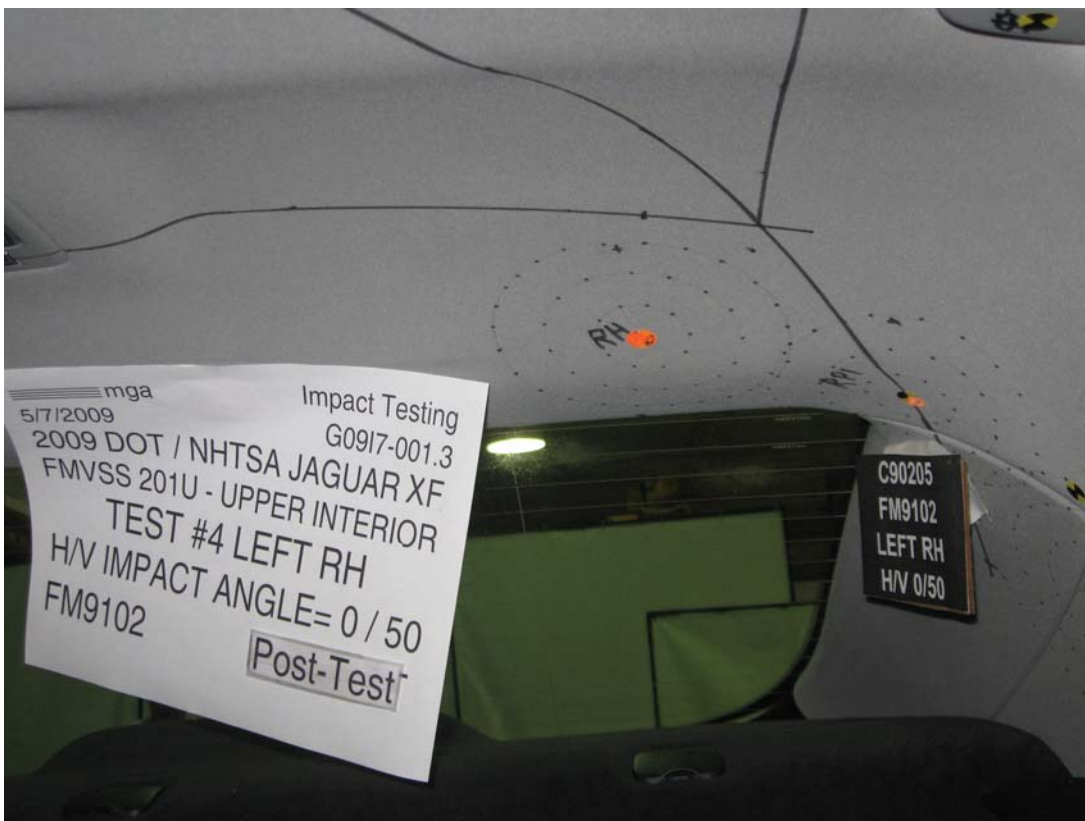

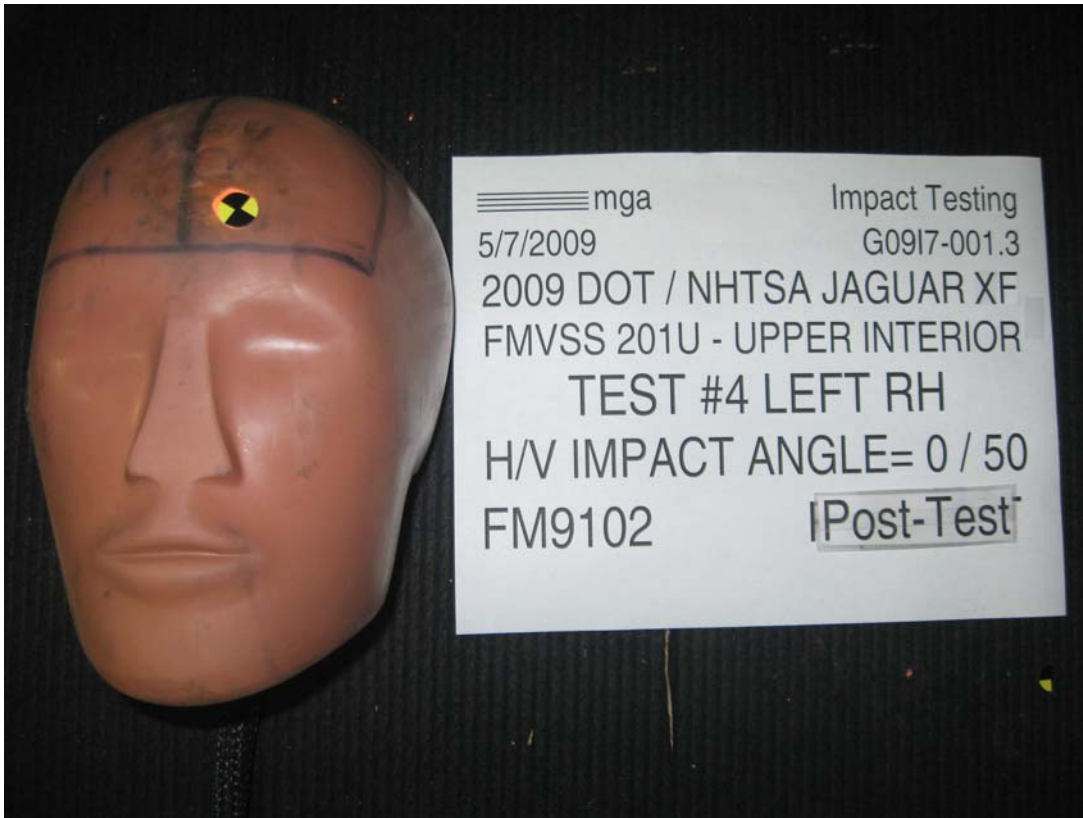

SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number:#4

Target (Vehicle Side): RHLeft

Temperature:21.3C

MGA Test Reference No.:FM9102

Humidity:57.1%

Approach Horizontal Angles:0°

Time of Test:2:42:47 PM

Approach Vertical Angles:50°

FMH Serial No:[035]

Additional Description:

TEST RESULTS:

HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
659	653	7.6	23.9	14	16 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J35919	-95.6	1.06	1.06
Y	6	J22664	94.3	0.85	0.85
Z	7	J35924	92.8	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):



No visible damage



Recorded By:  Approved By*:  Date: 5/7/2009
 *Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9102


Target Location: RH, Left Side

Test Date: 5/7/2009

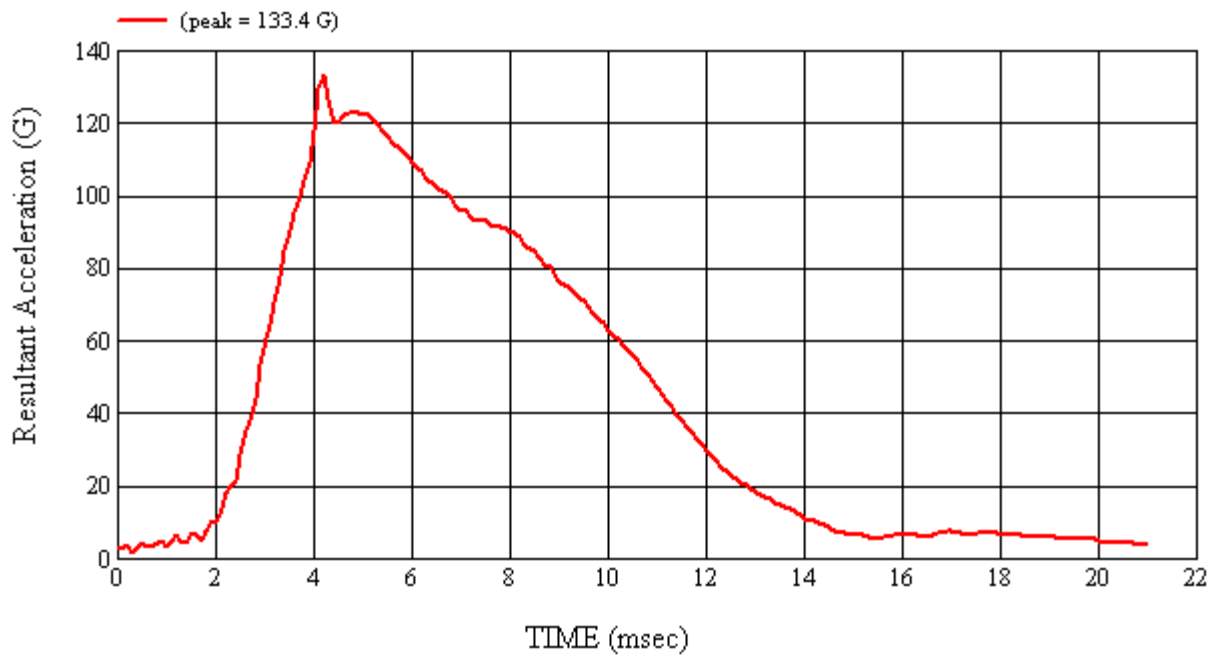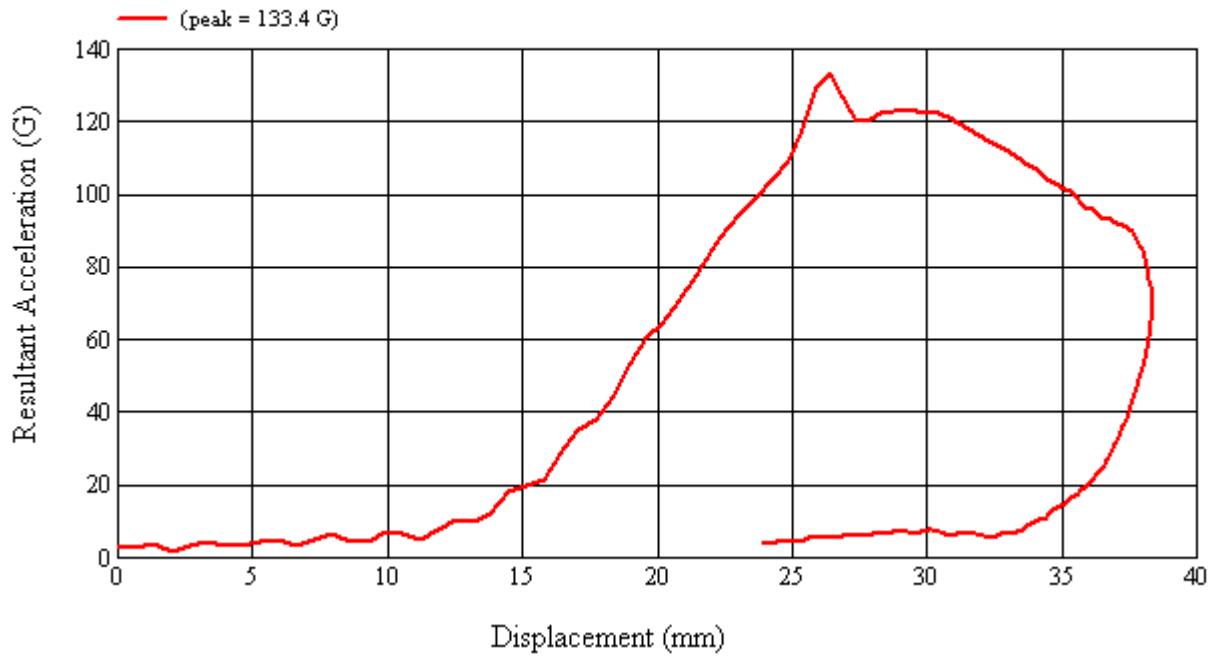


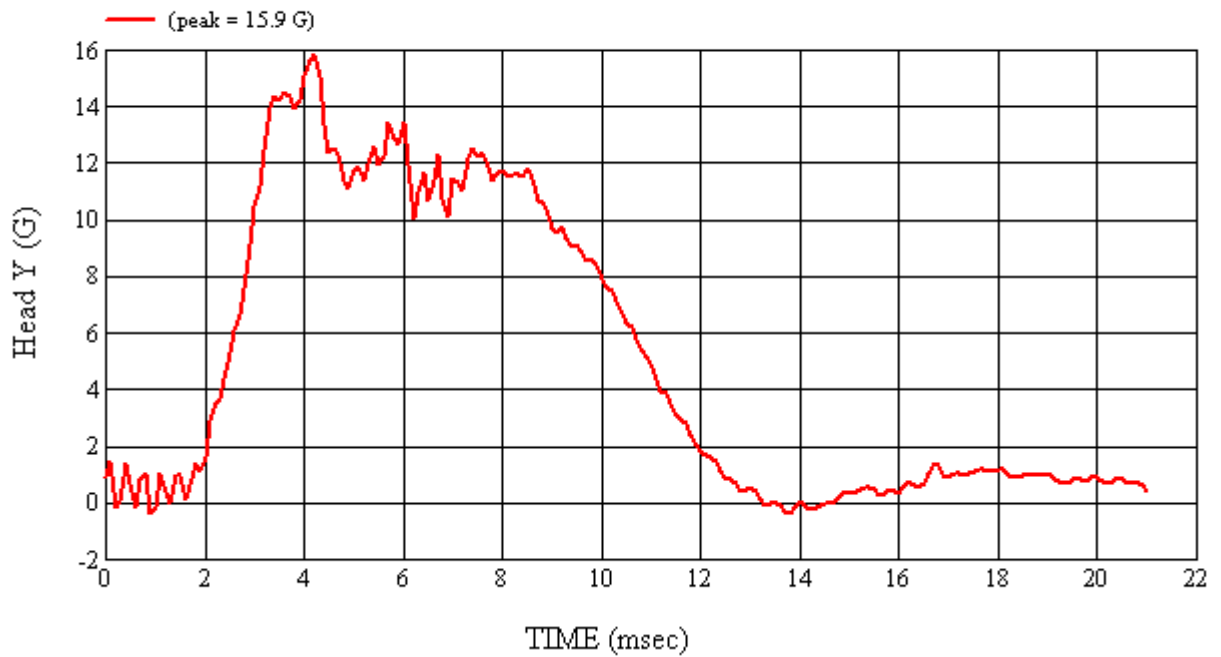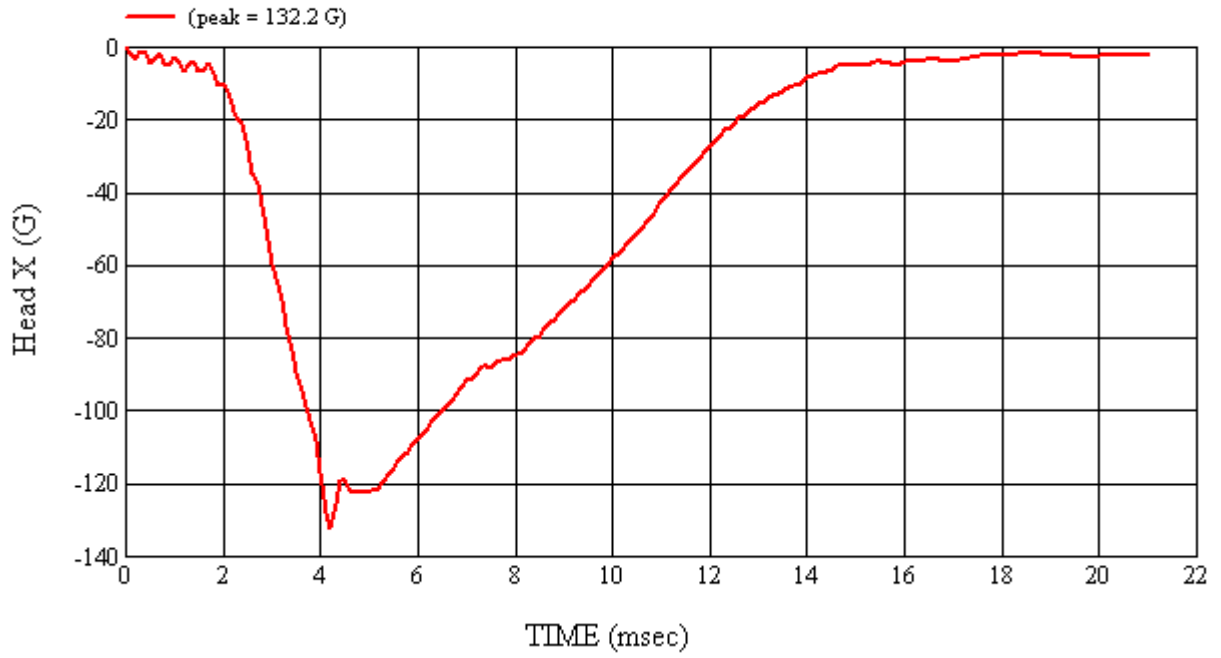


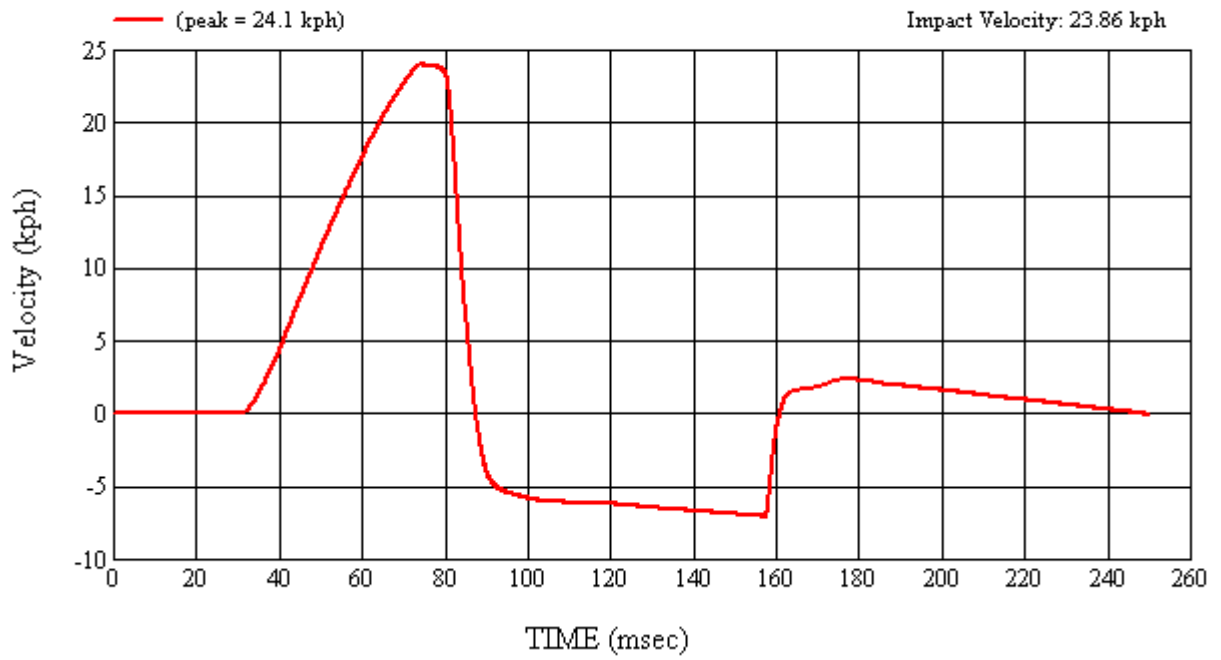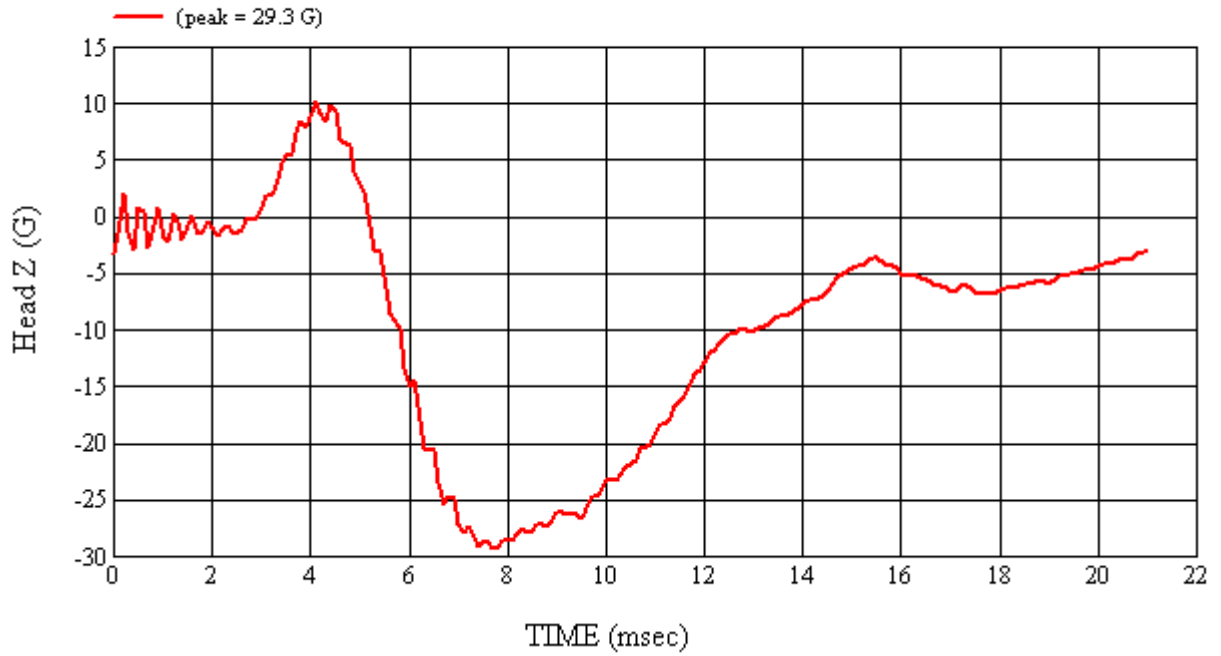

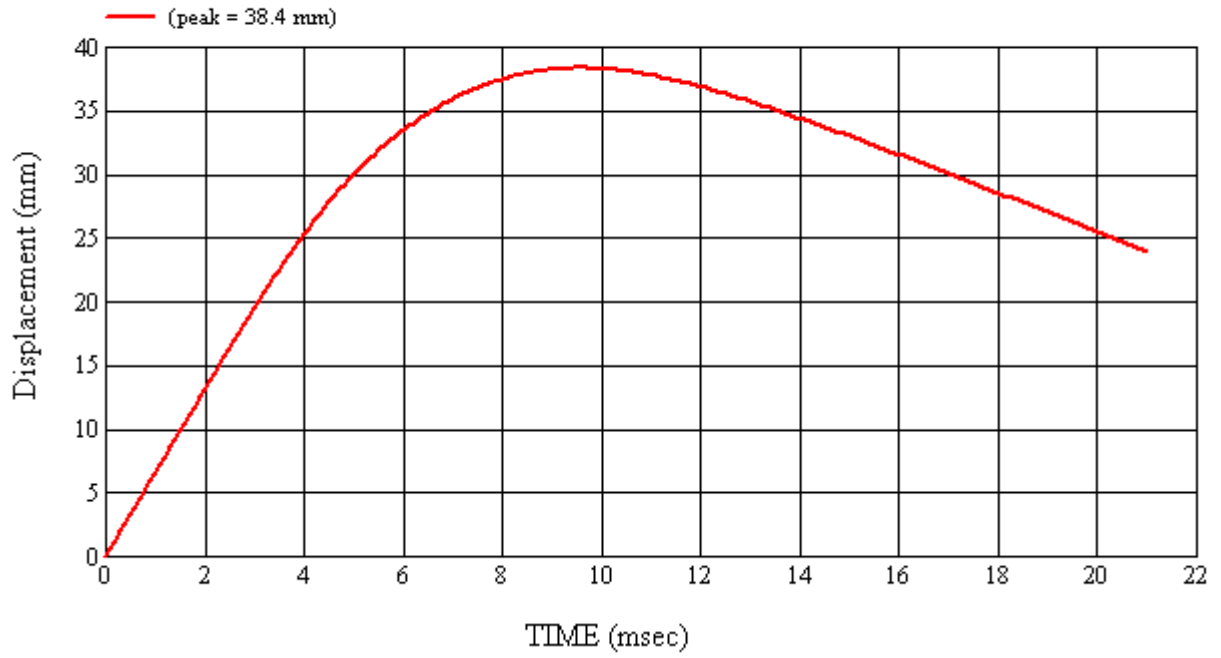



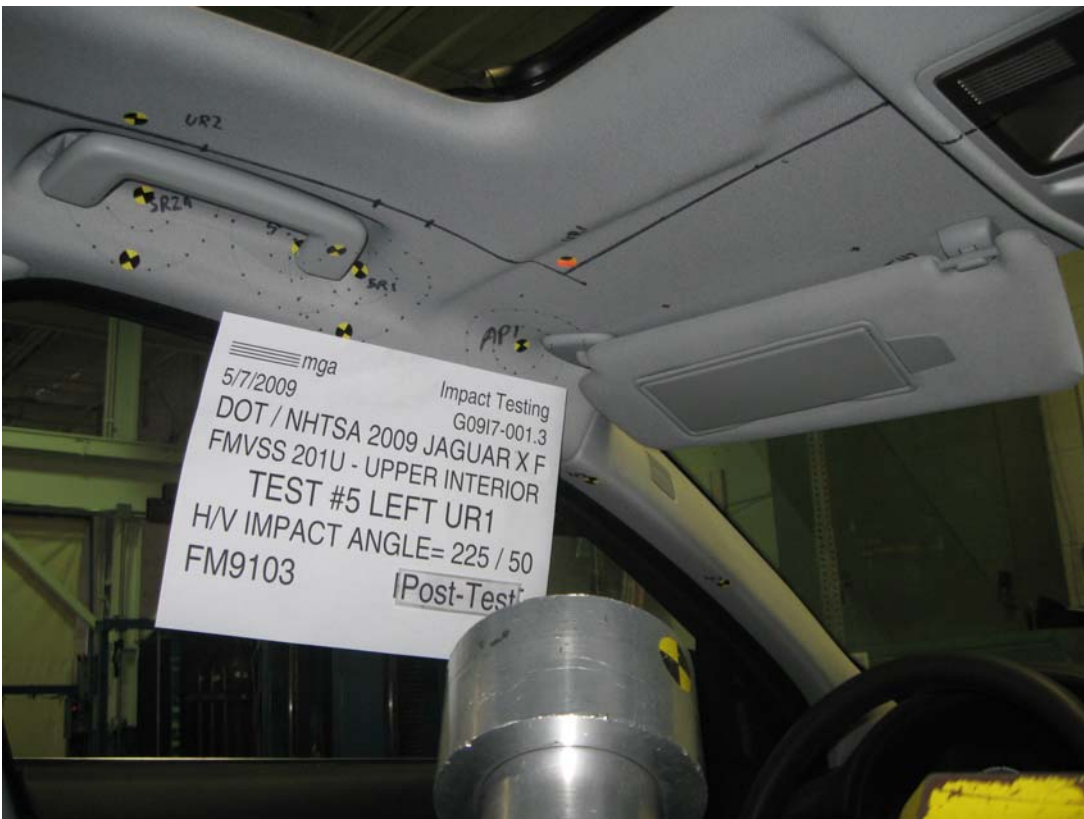

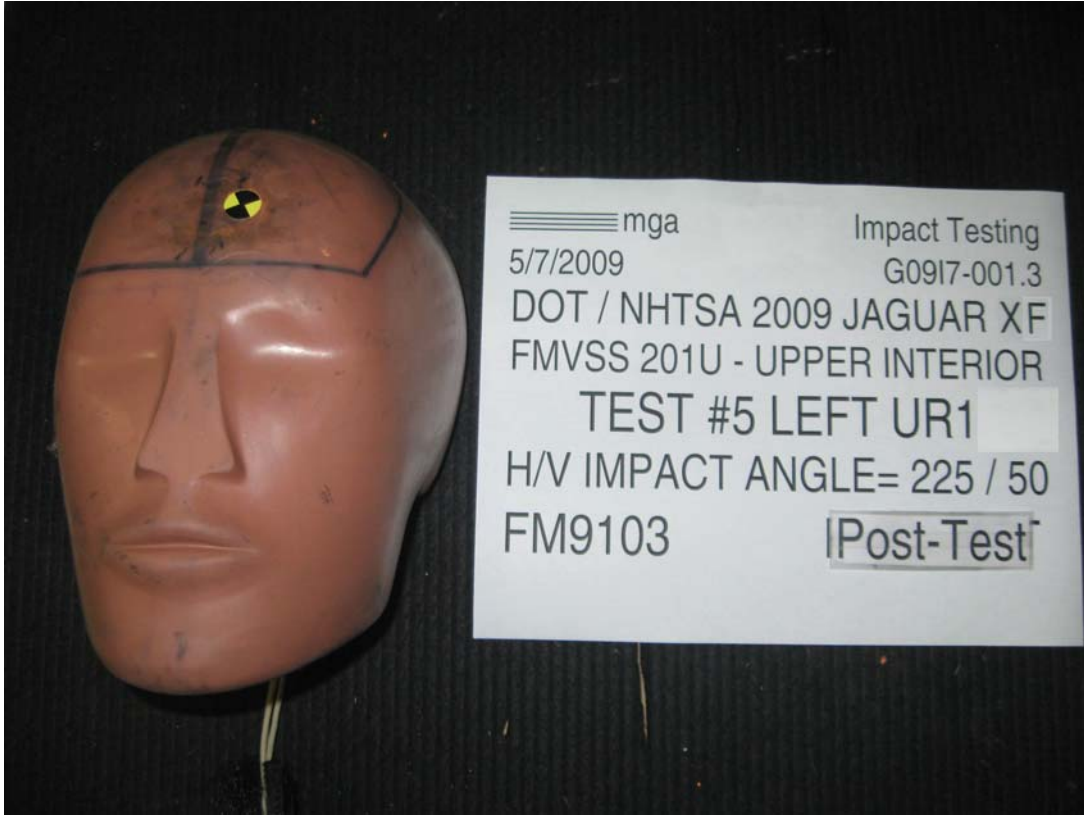

SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT / NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Target (Vehicle Side): UR1Left

MGA Test Reference No.:FM9103

Approach Horizontal Angles:225°

Approach Vertical Angles:50°

Additional Description:located at A-Pillar

Test Number:#5

Temperature:21.1C

Humidity:62.5%

Time of Test:3:51:26 PM

FMH Serial No:[037]

TEST RESULTS:

HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
797	836	7.3	24.1	22	12 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	AHTB2	-115.9	1.06	1.06
Y	6	J14103	93.7	0.84	0.85
Z	7	J35800	97.1	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):



No visible damage



Recorded By:  Approved By*:  Date: 5/7/2009
 *Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9103


Target Location: UR1, Left Side


Test Date: 5/7/2009

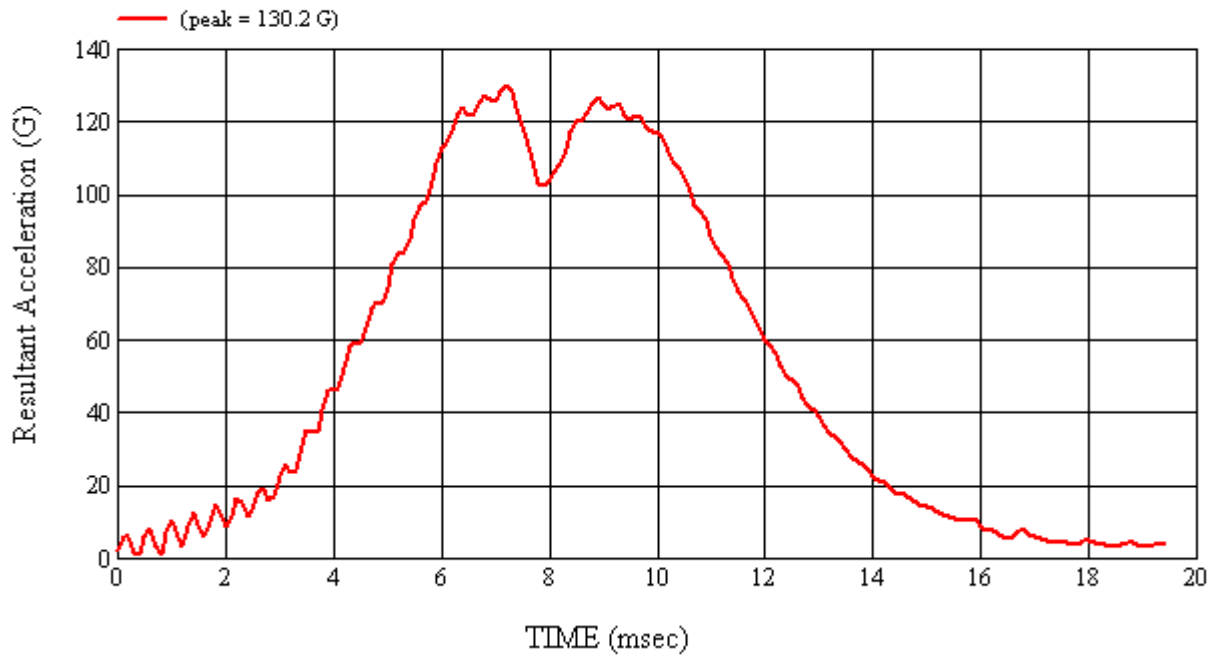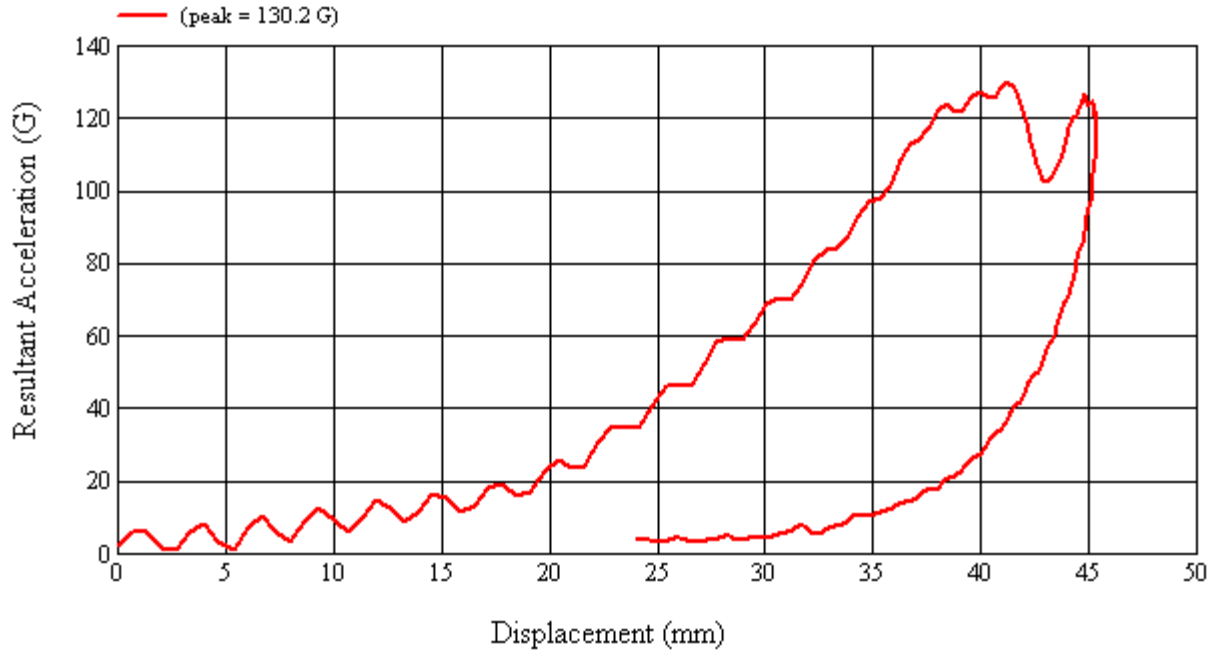


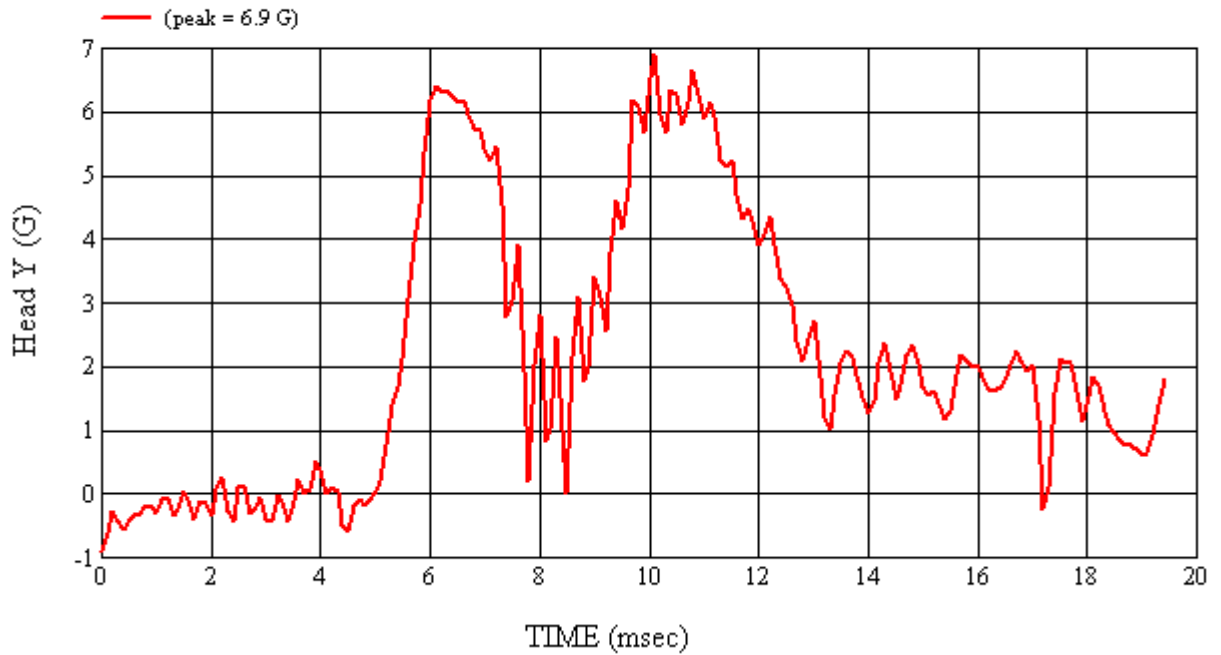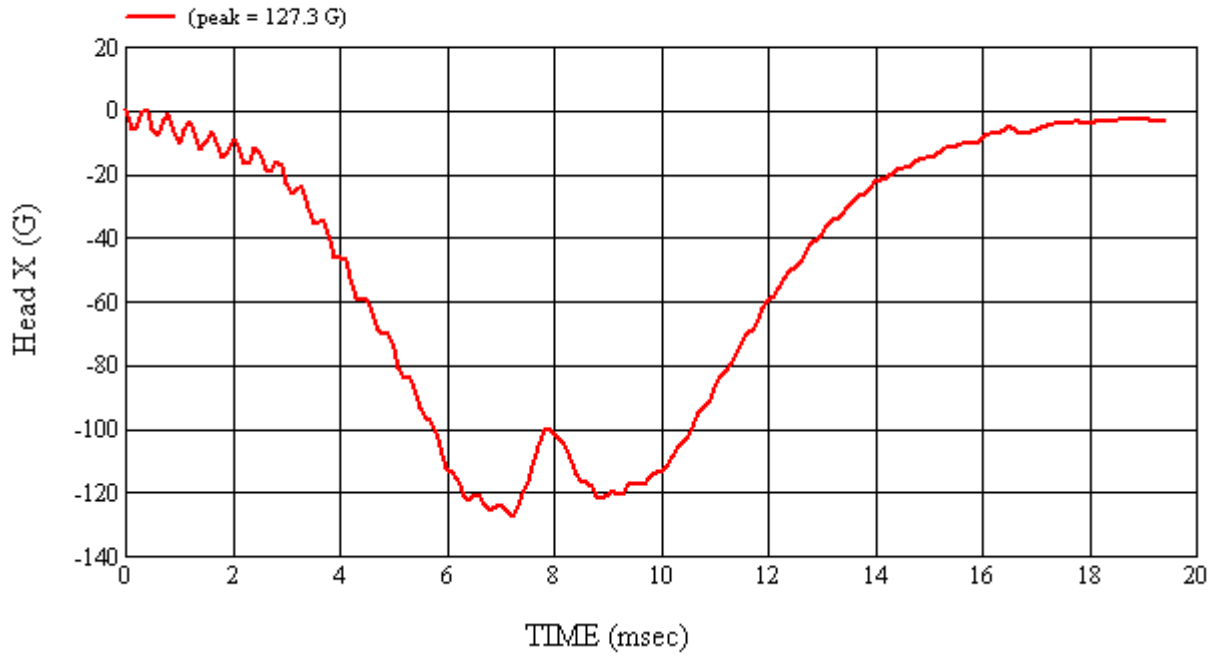


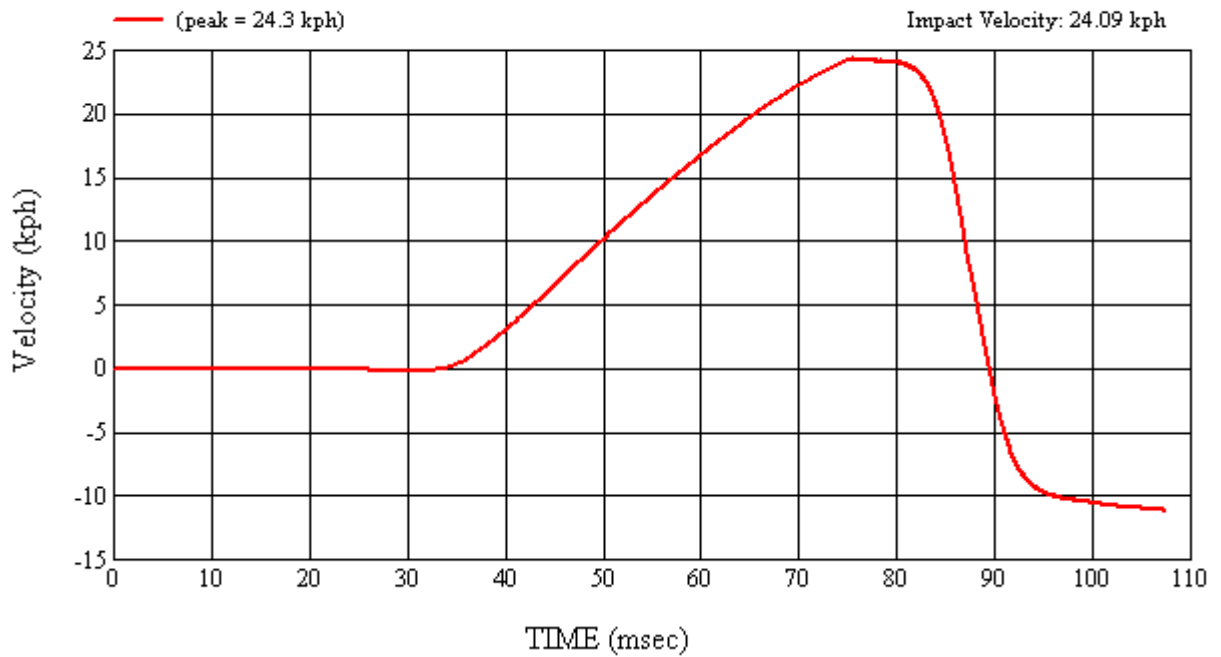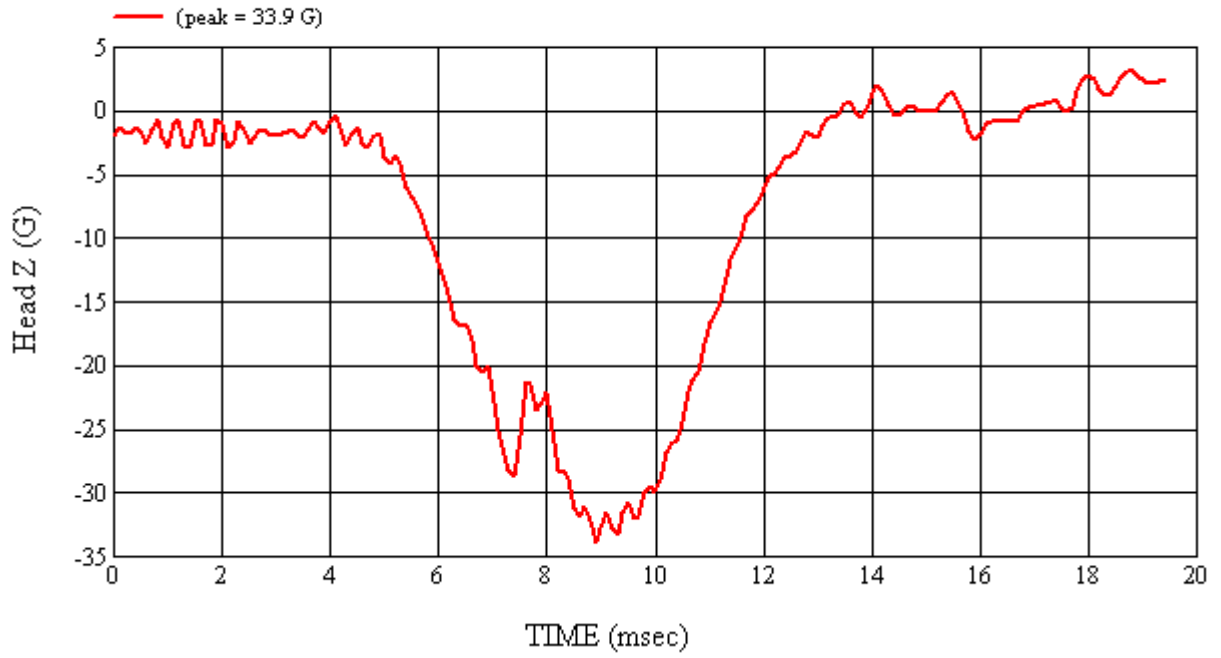

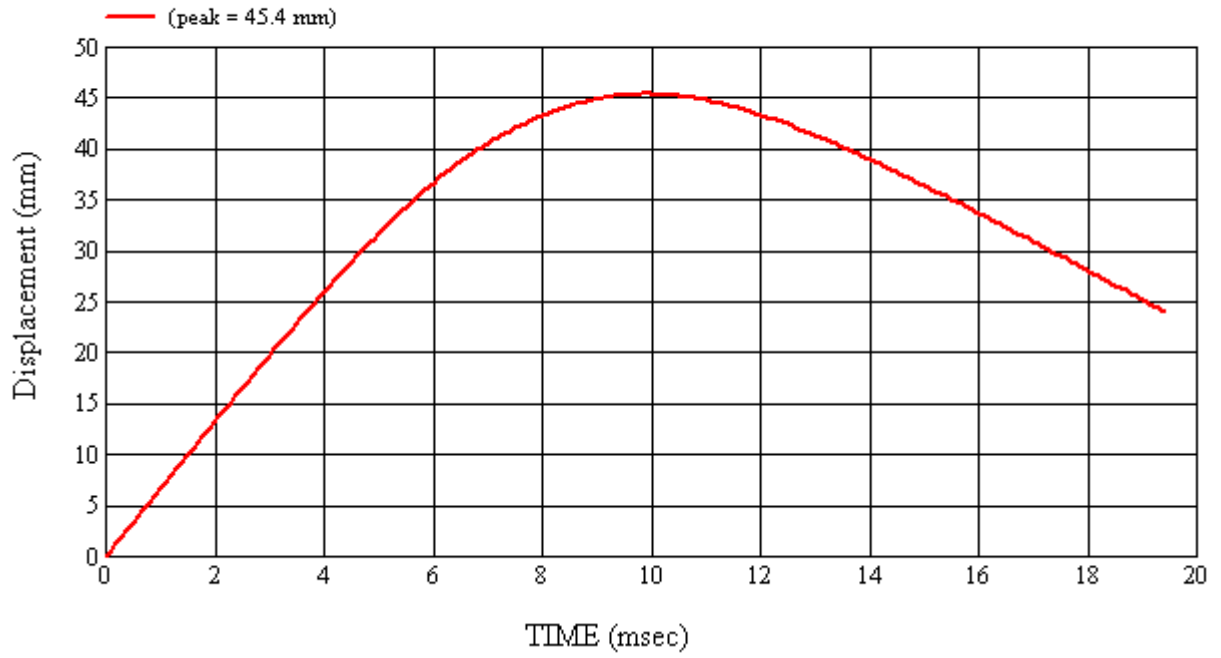

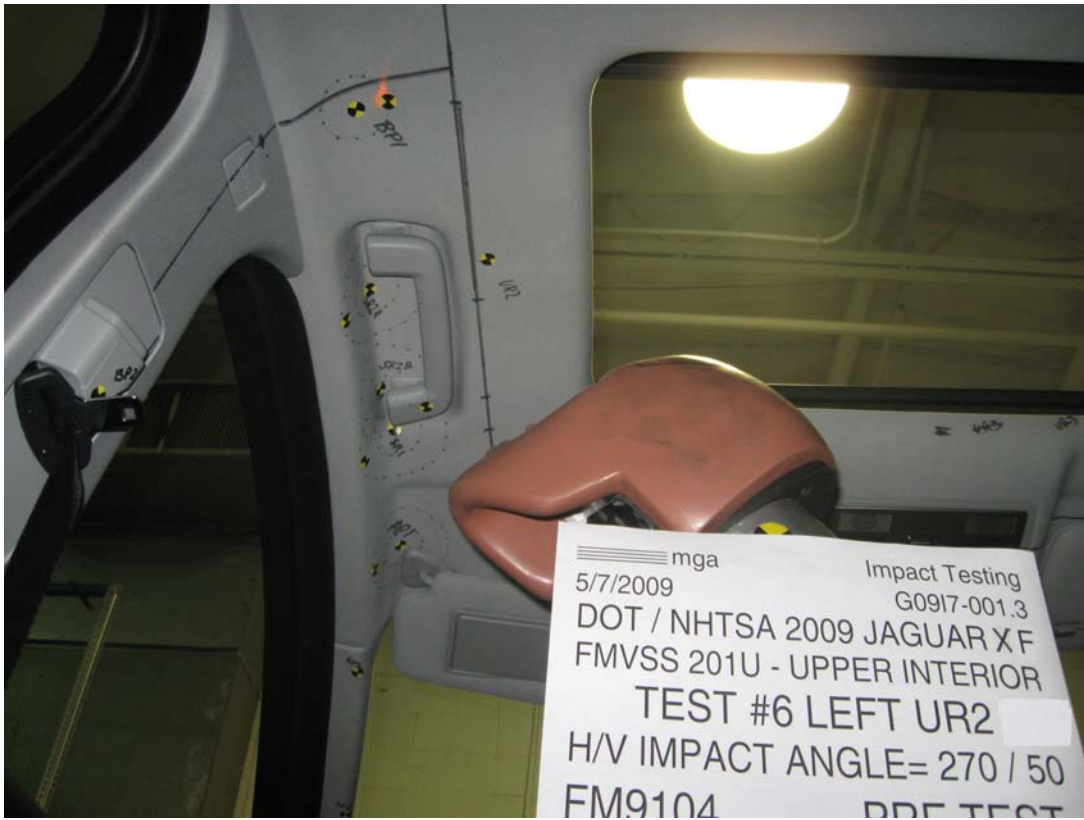

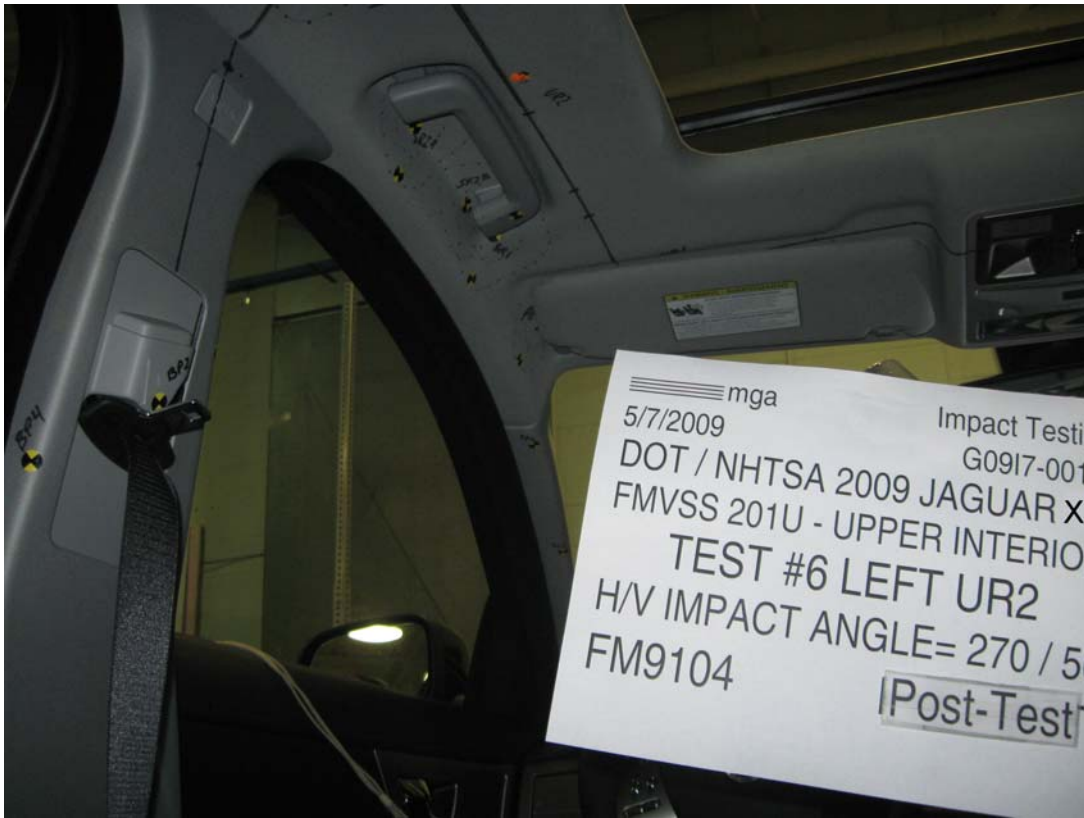

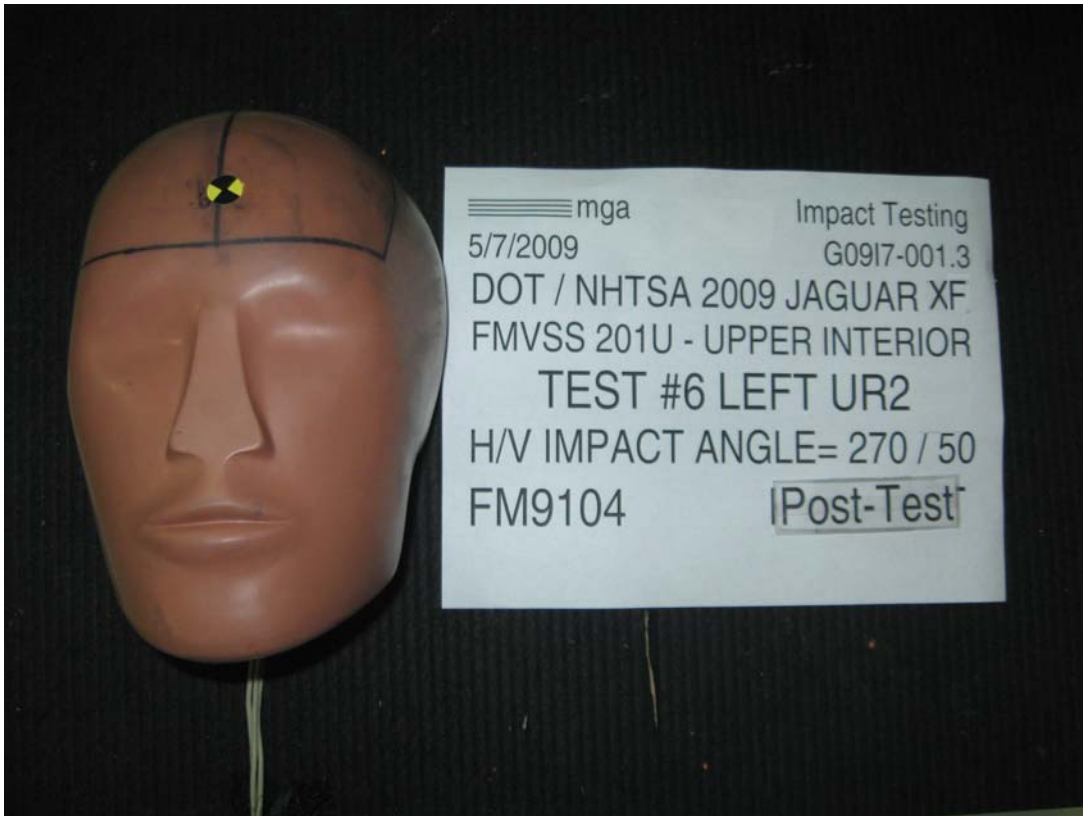

SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G0917-001.3 VEHICLE YR/MAKE/MODEL: 2009/DOT / NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number: #6

Target (Vehicle Side): UR2 Left

Temperature: 21.2C

MGA Test Reference No.: FM9104

Humidity: 63.4%

Approach Horizontal Angles: 270°

Time of Test: 4:58:10 PM

Approach Vertical Angles: 50°

FMH Serial No: [38]

Additional Description: located at rear attachment of driver's grab handle

TEST RESULTS:



HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
575	542	10.5	23.9	22	2 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J22700	-94	1.06	1.06
Y	6	J36197	106.3	0.85	0.85
Z	7	J36353	97.5	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):



No visible damage.



Recorded By:  Approved By*:  Date: 5/7/2009
 *Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9104


Target Location: UR2, Left Side


Test Date: 5/7/2009

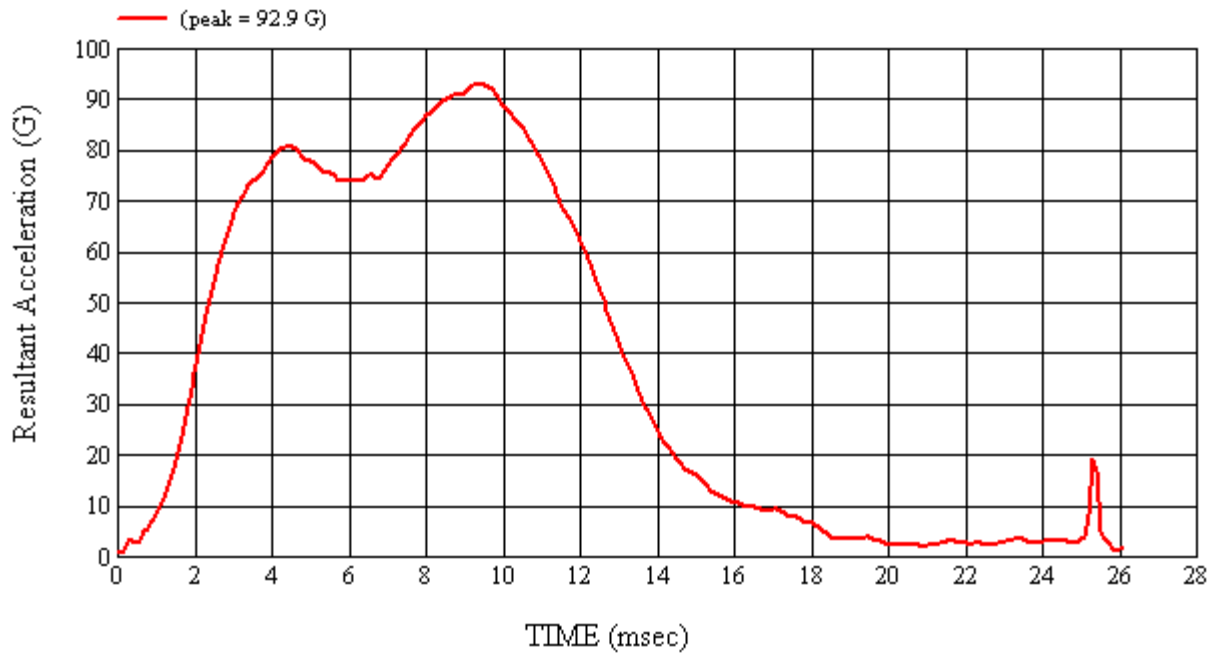
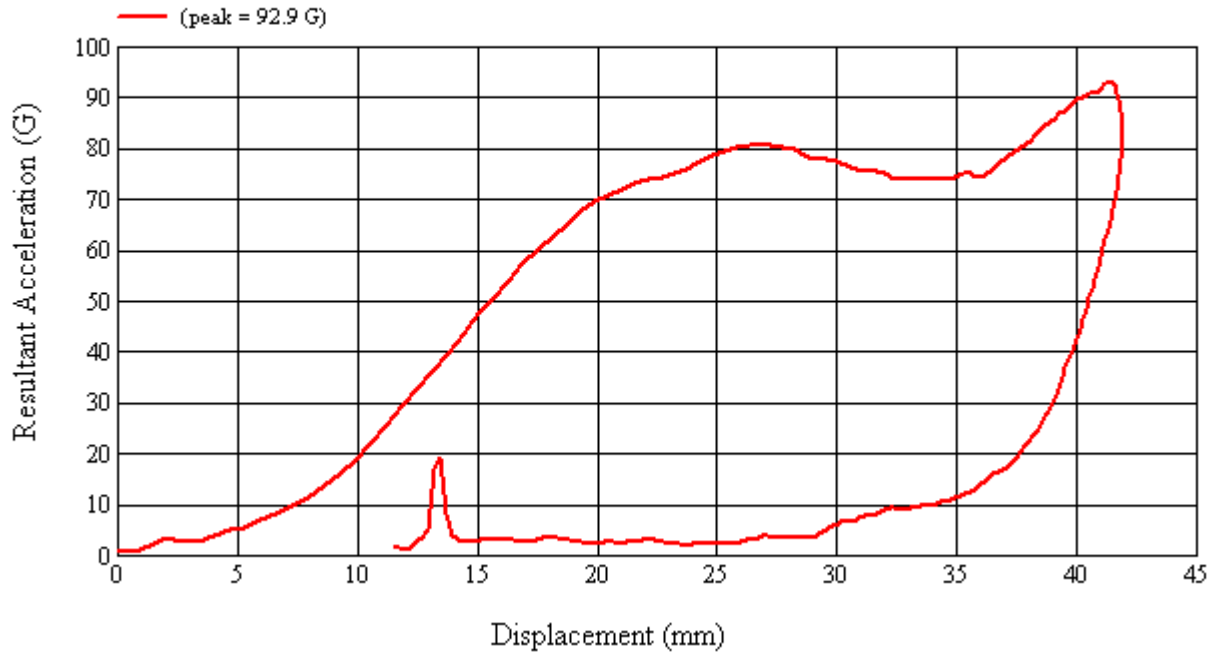


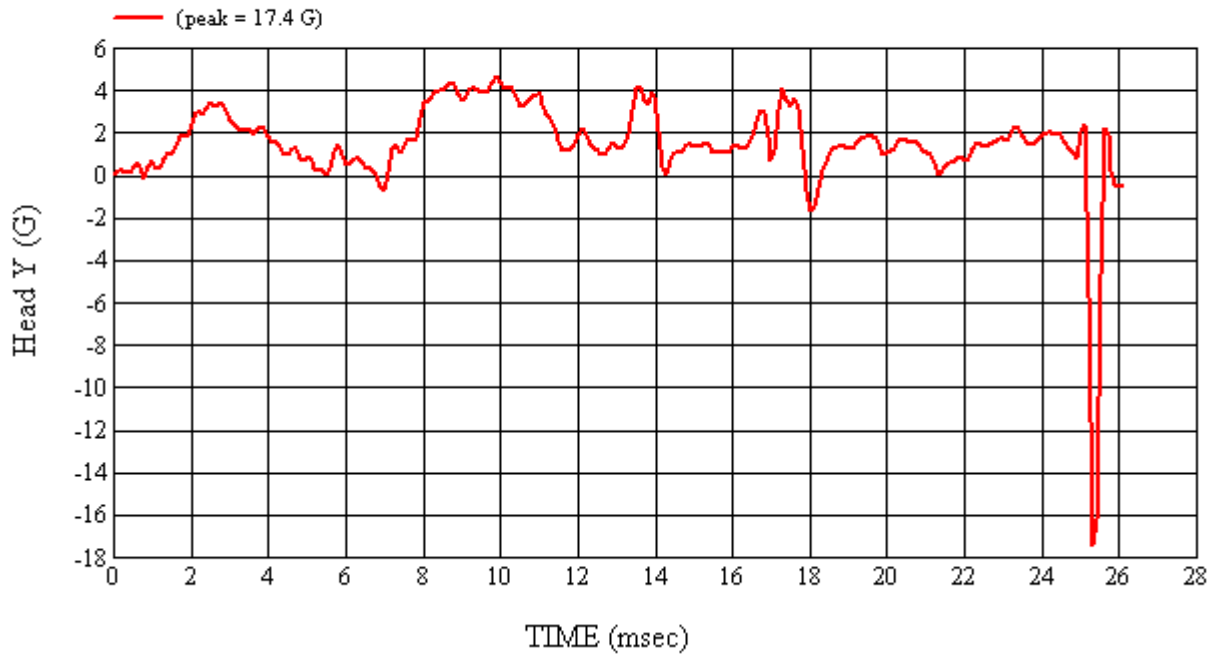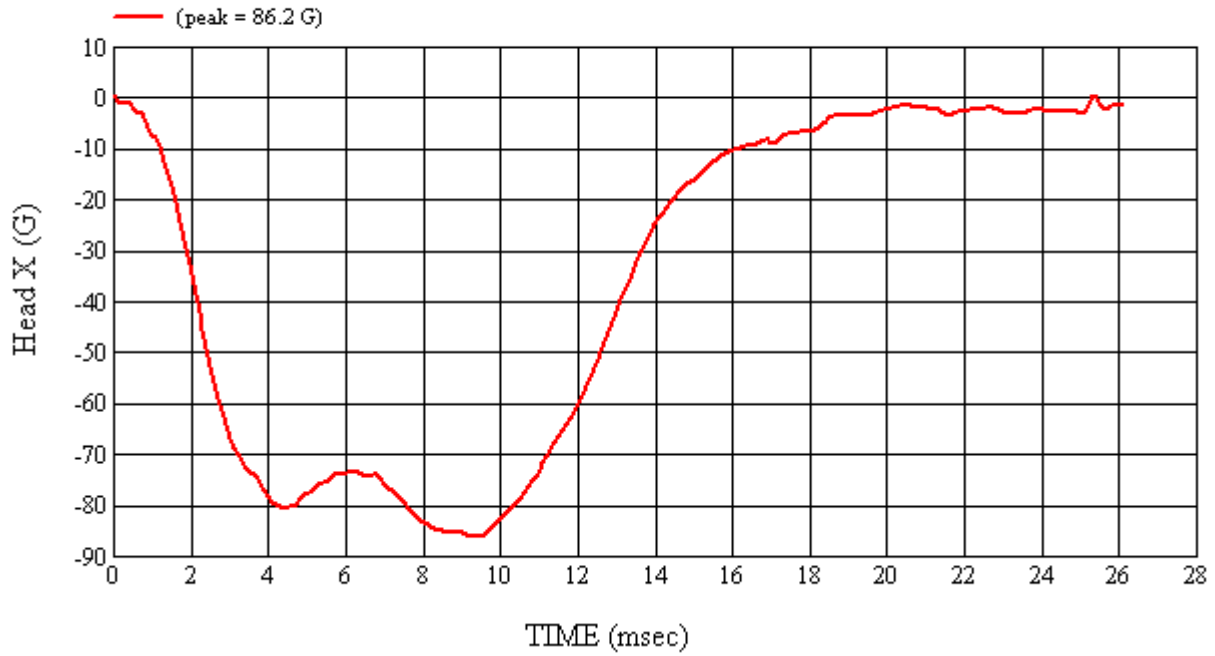


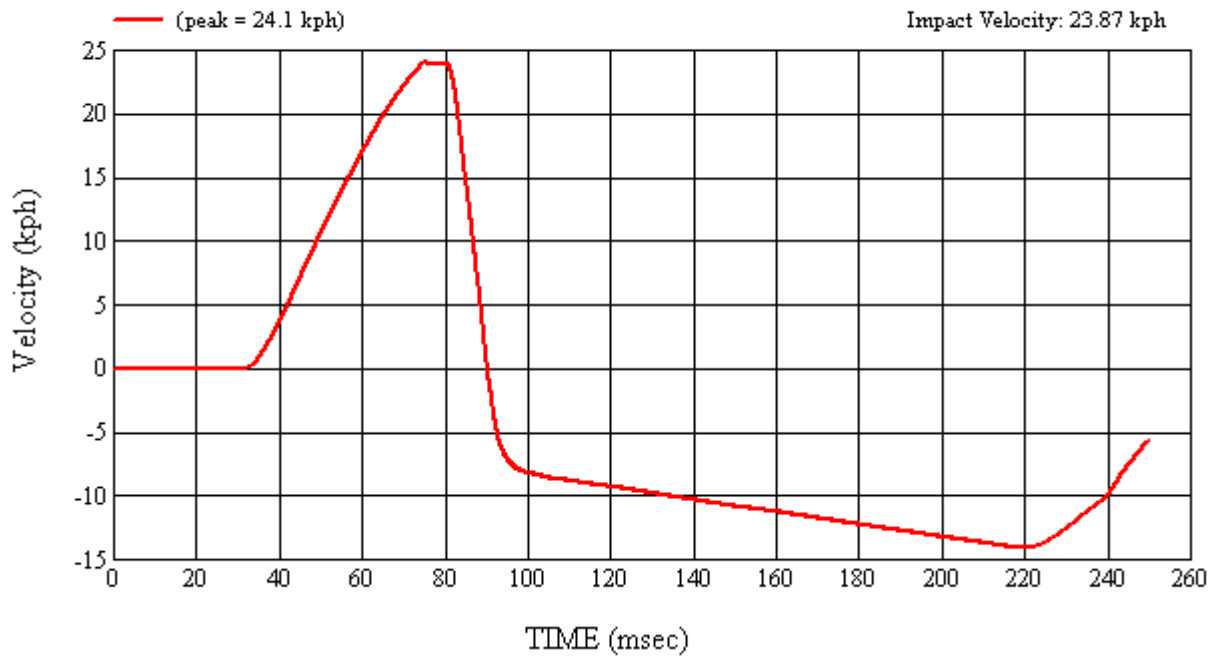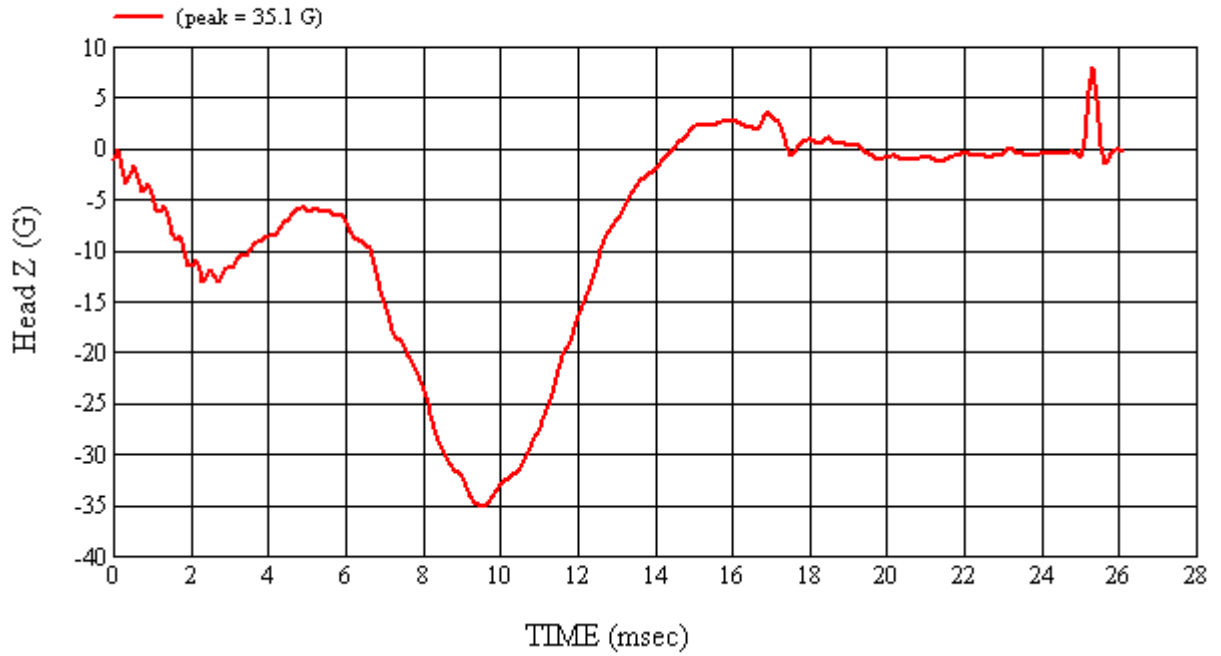

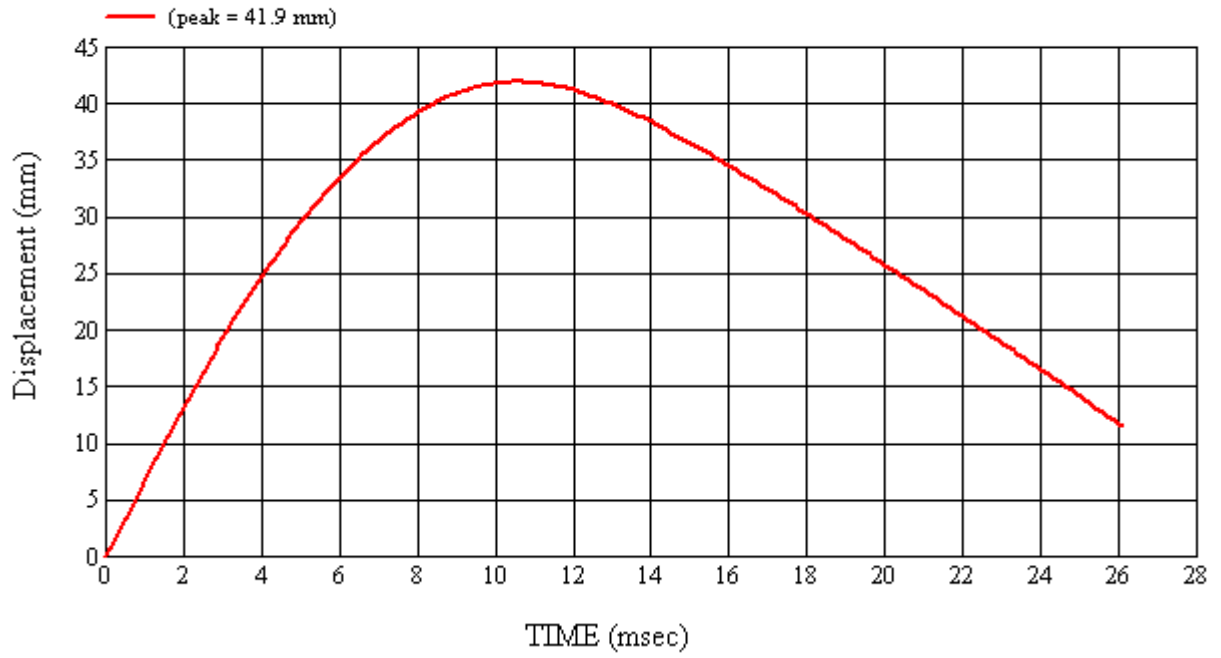

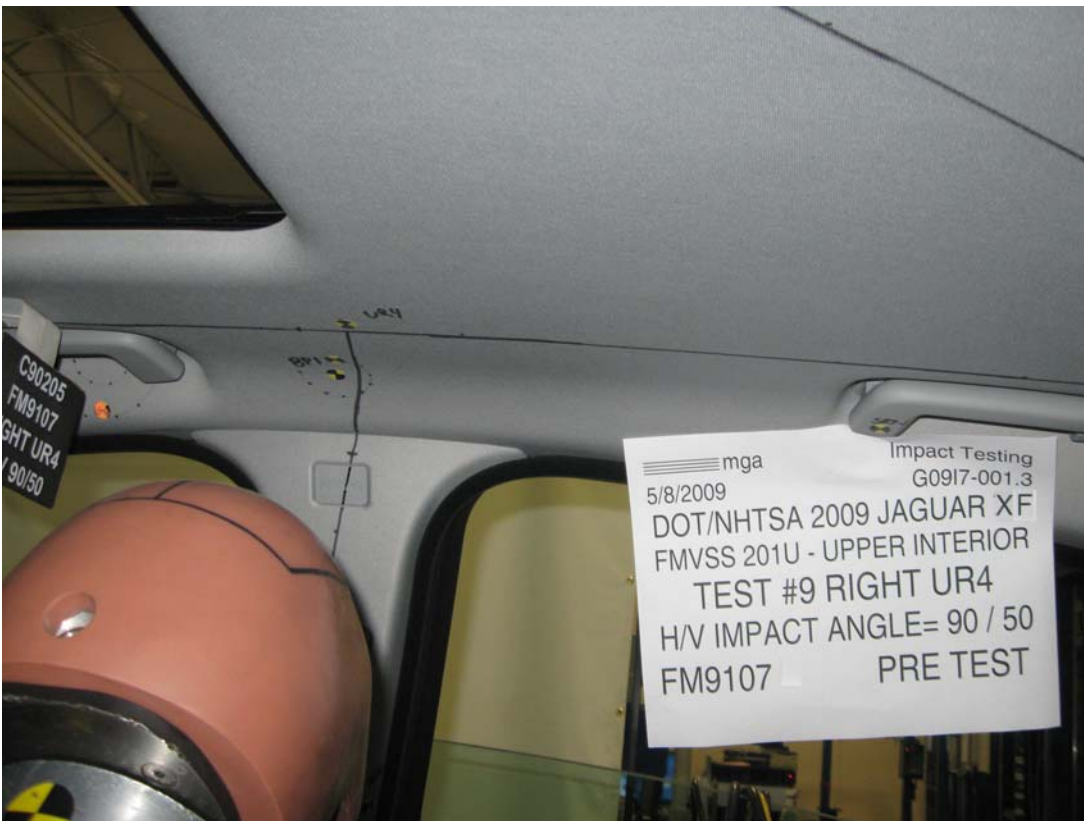

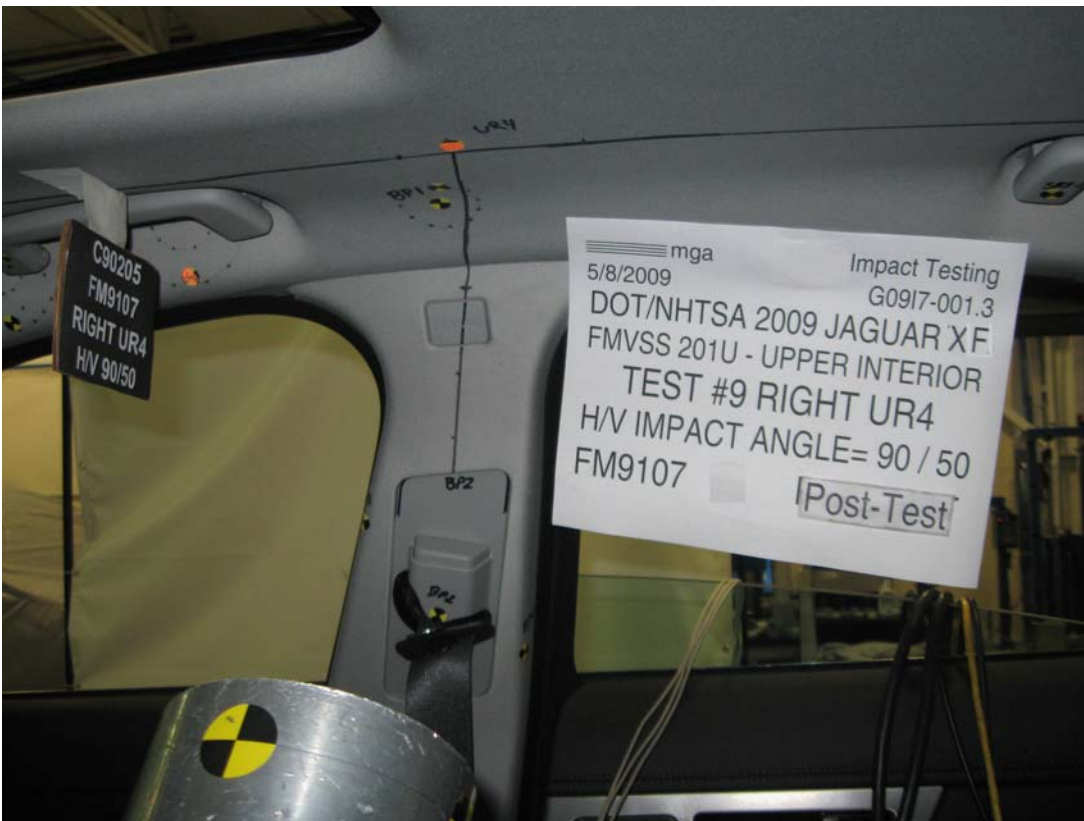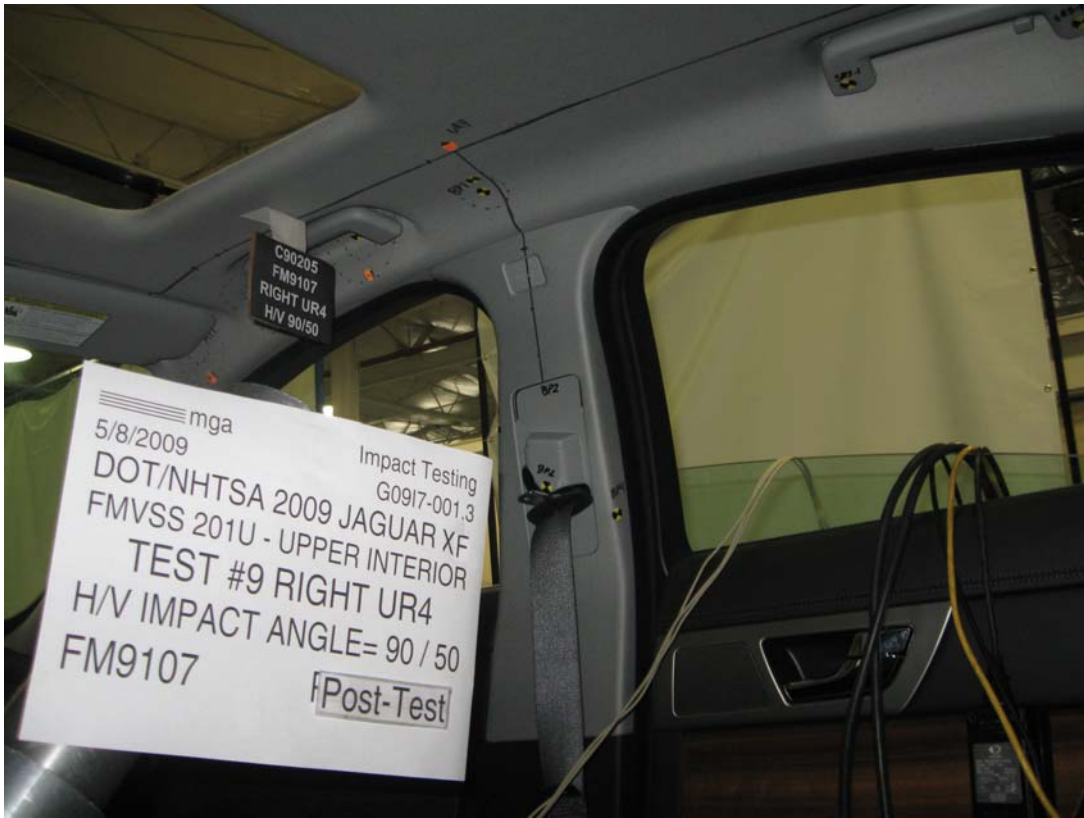

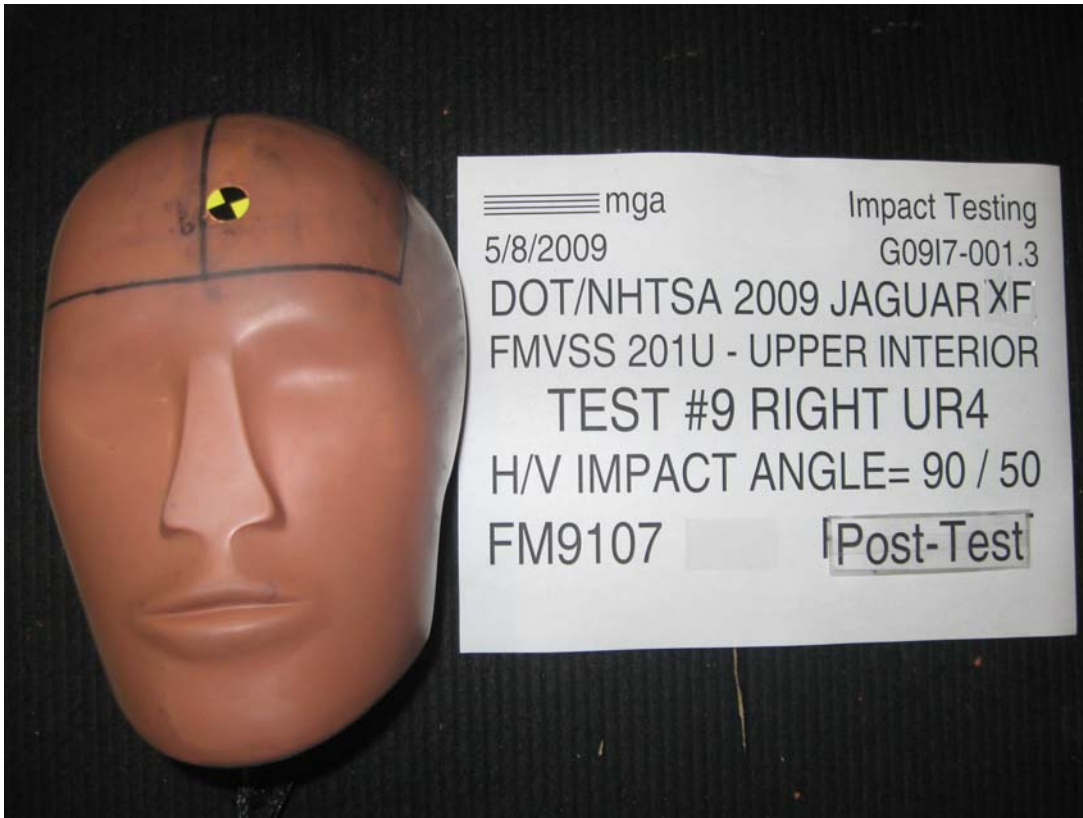

SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number:#9

Target (Vehicle Side): UR4Right

Temperature:21.1C

MGA Test Reference No.:FM9107

Humidity:59.9%

Approach Horizontal Angles:90°

Time of Test:12:10:36 PM

Approach Vertical Angles:50°

FMH Serial No:[038]

Additional Description:Located above B-Pillar

TEST RESULTS:


HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
548	506	13	23.9	24	7 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J22700	-94	1.05	1.05
Y	6	J36197	106.3	0.84	0.84
Z	7	J36353	97.5	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):

No damage observed



Recorded By:  Approved By*:  Date: 5/8/2009



*Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9107


Target Location: UR4, Right Side



Test Date: 5/8/2009

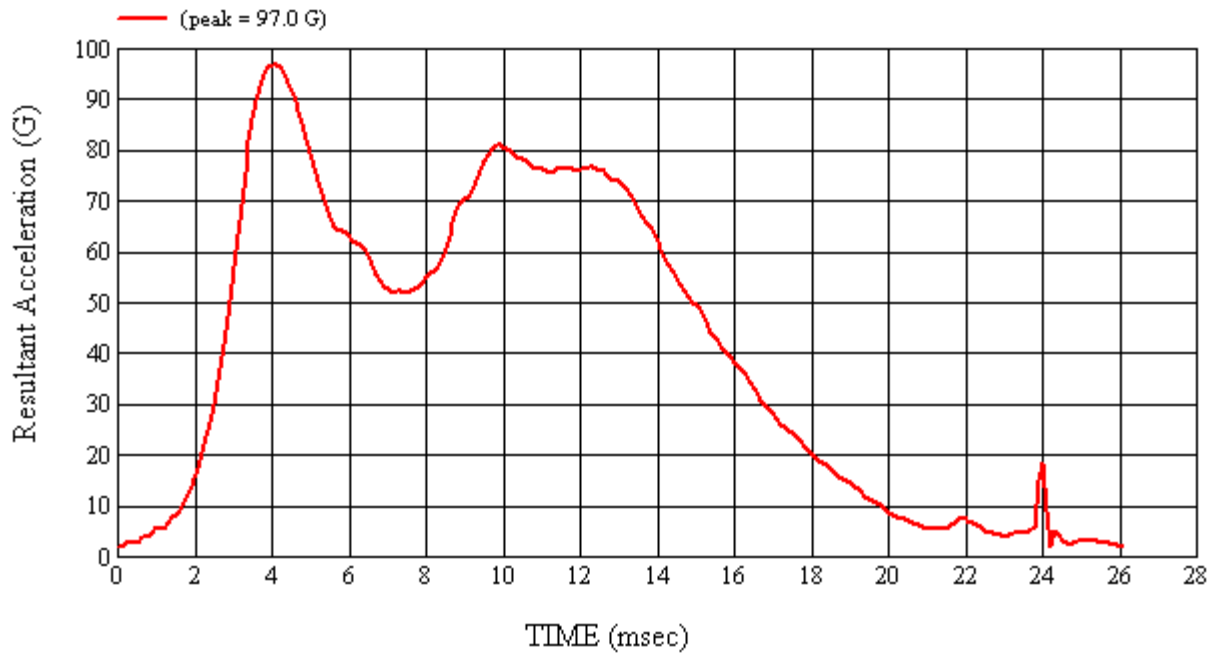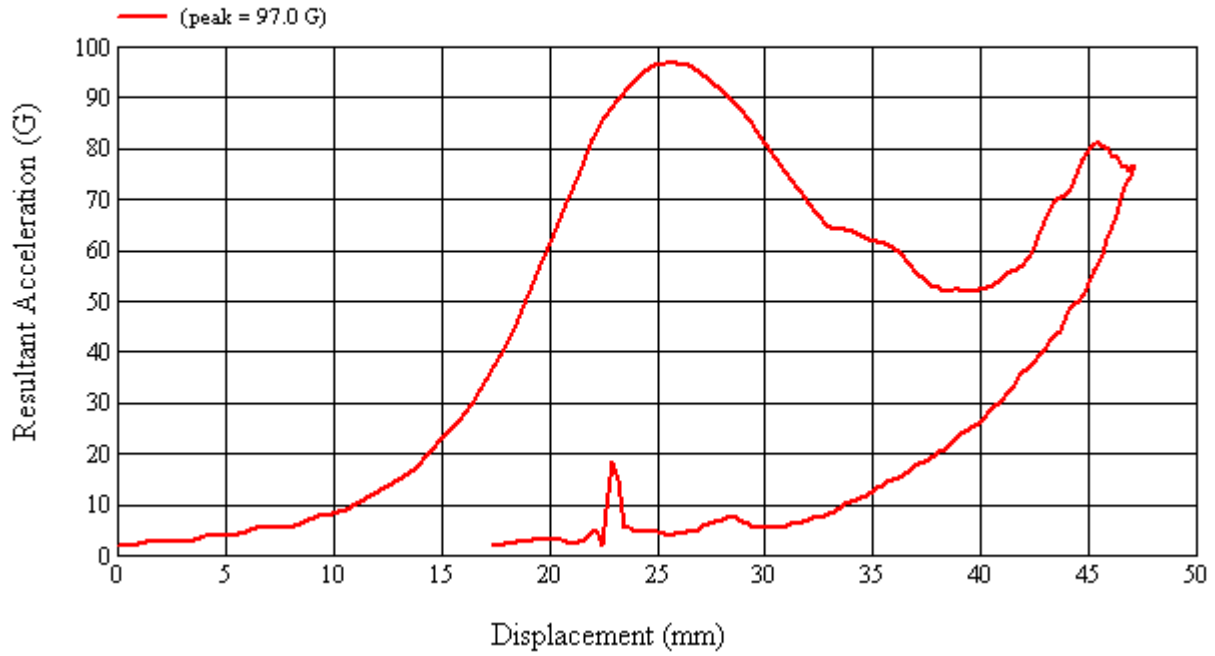


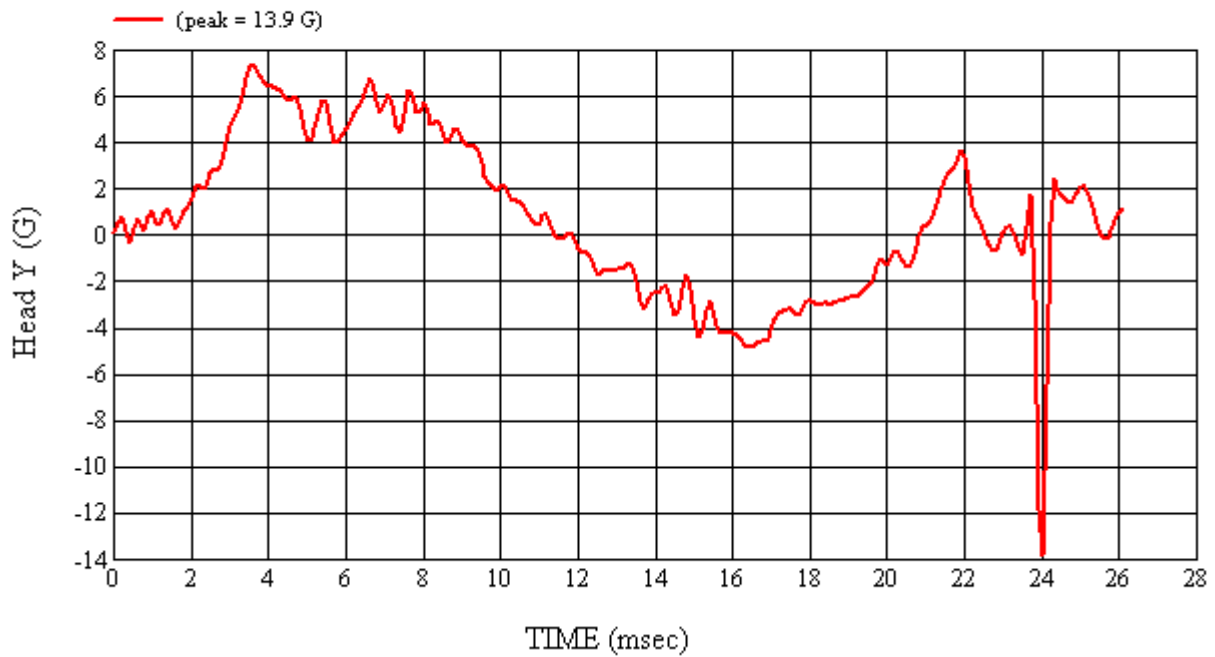
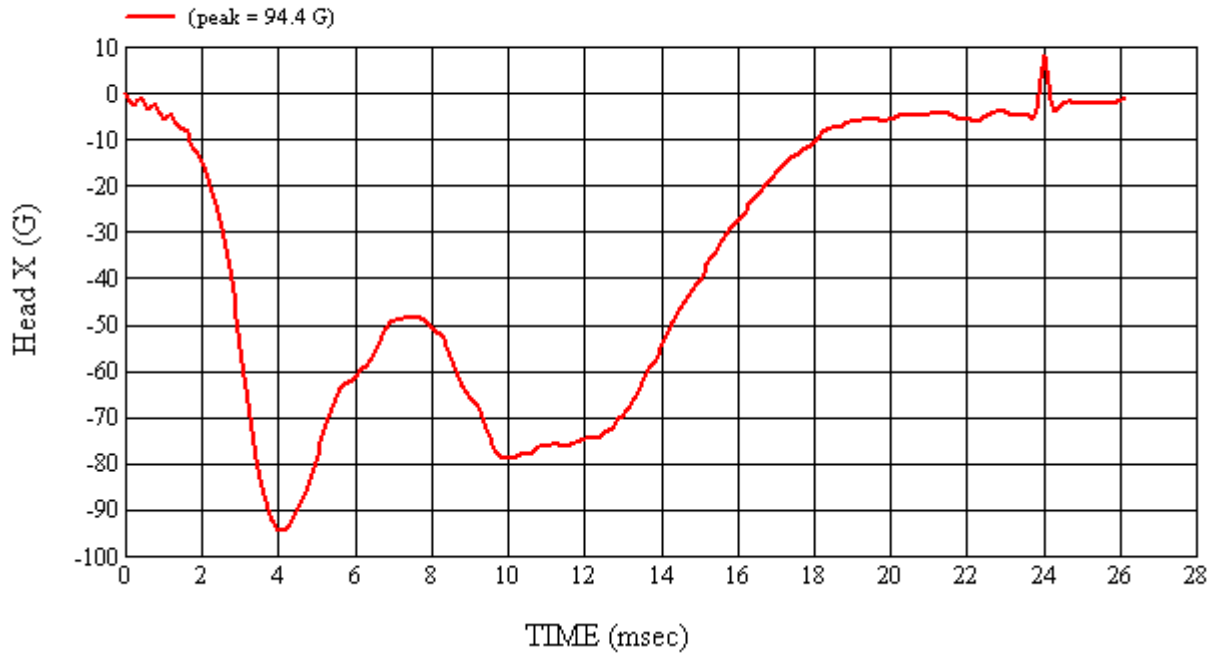


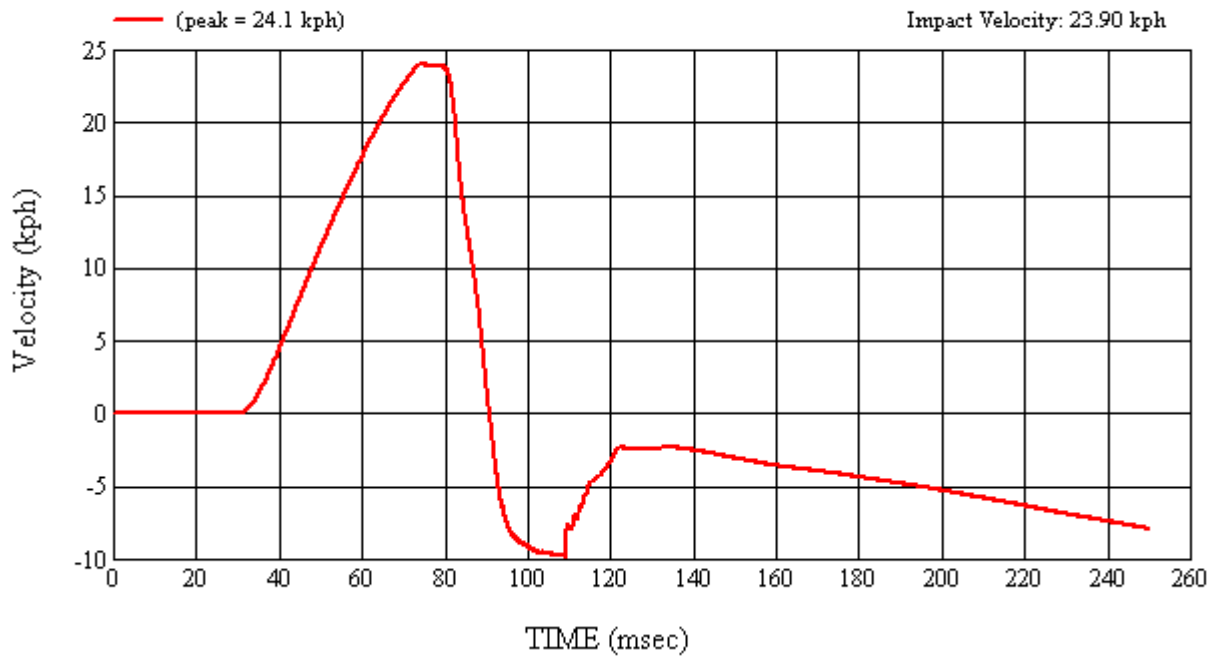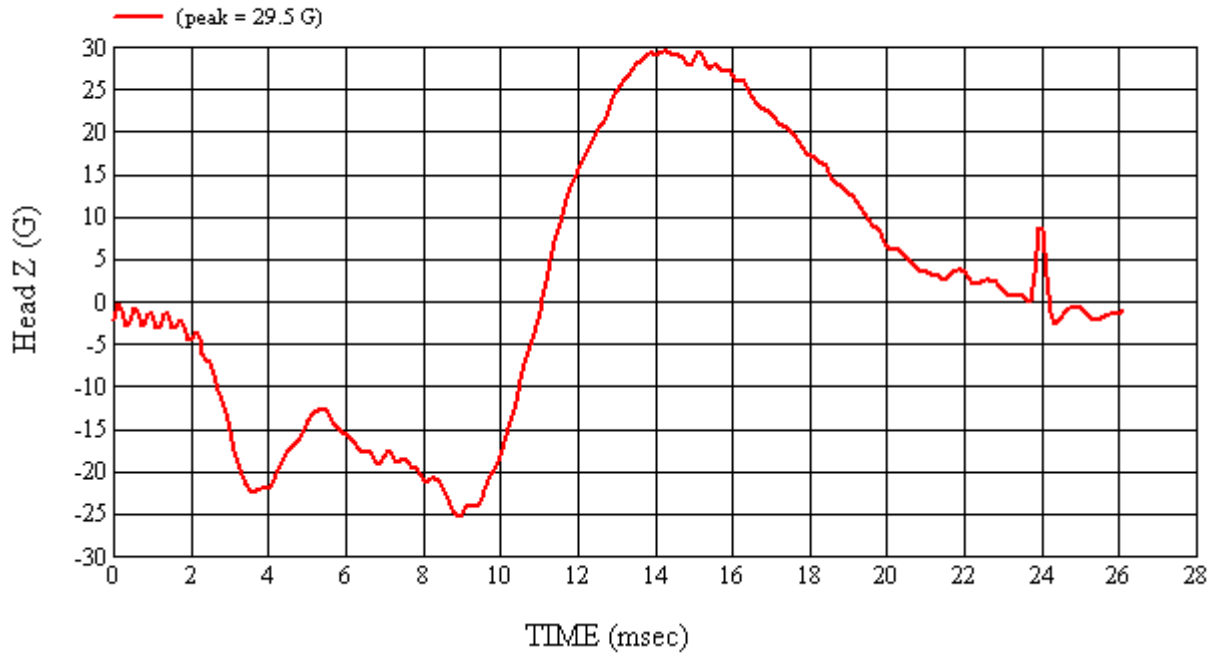

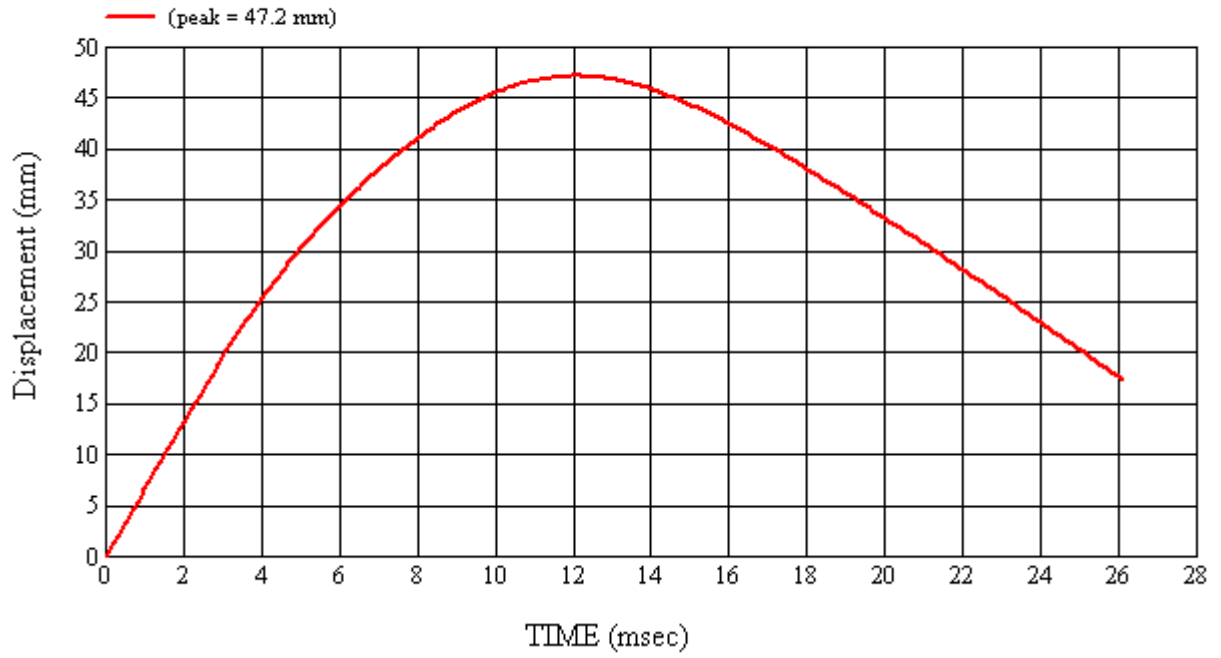

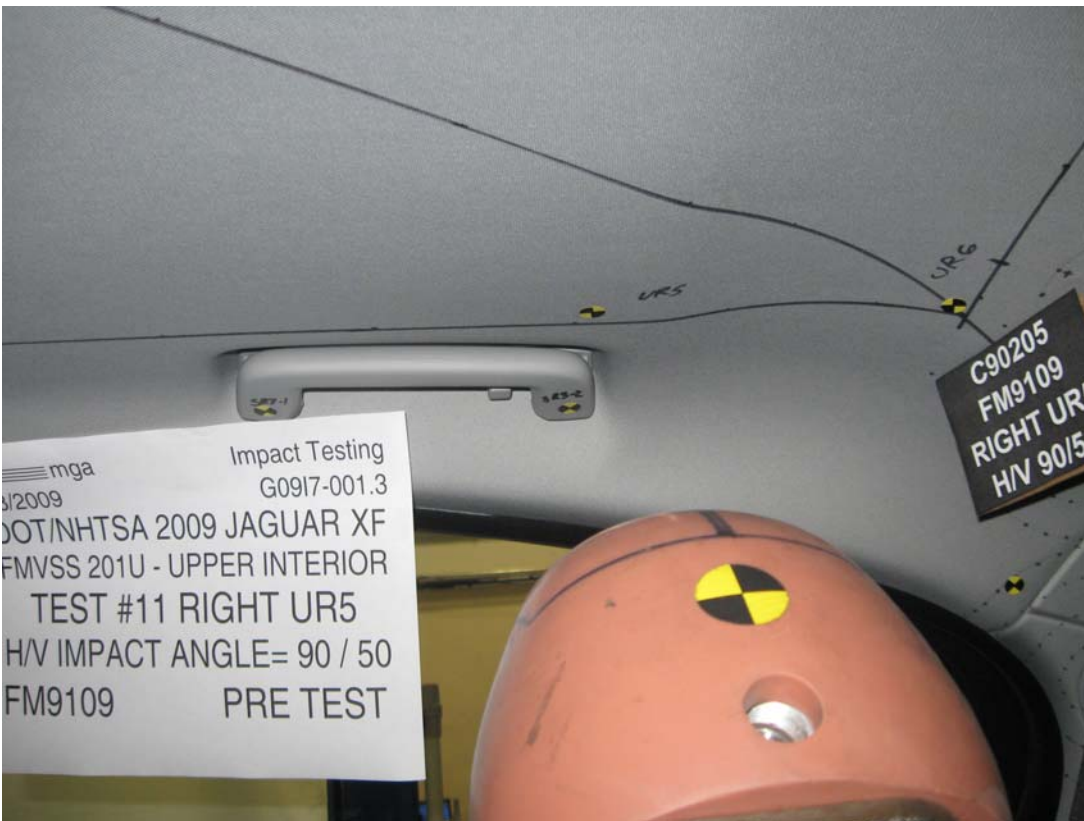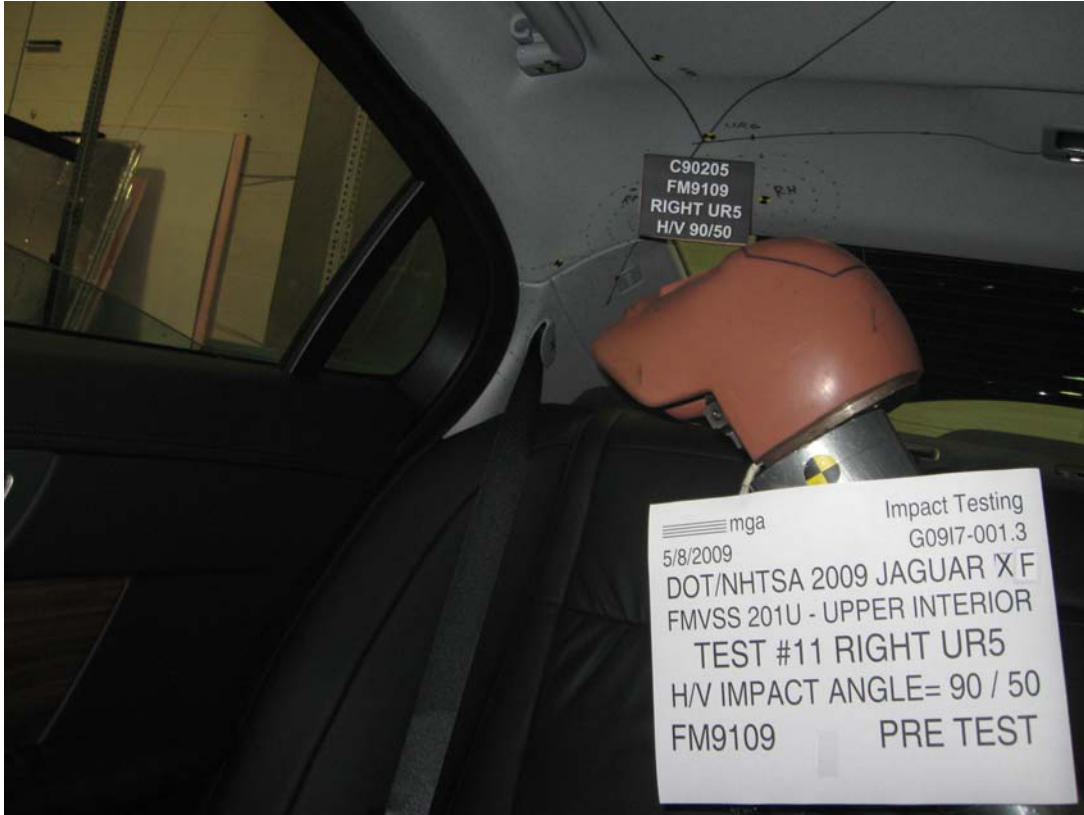

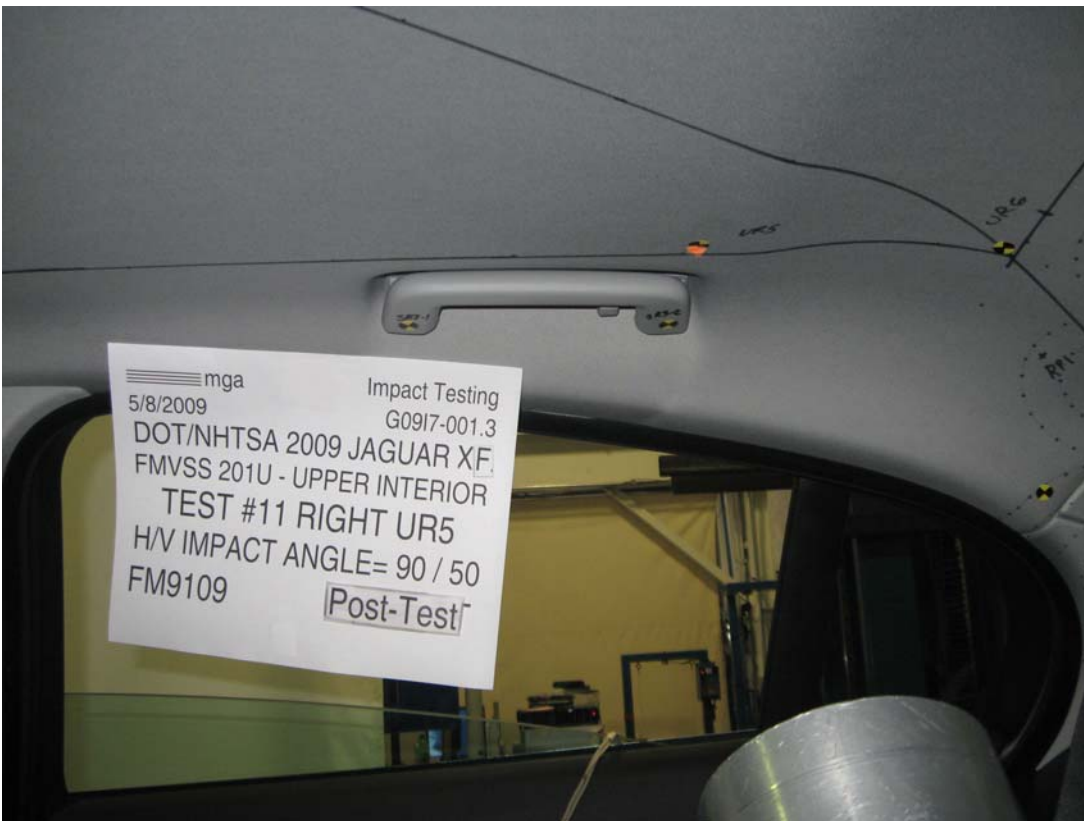

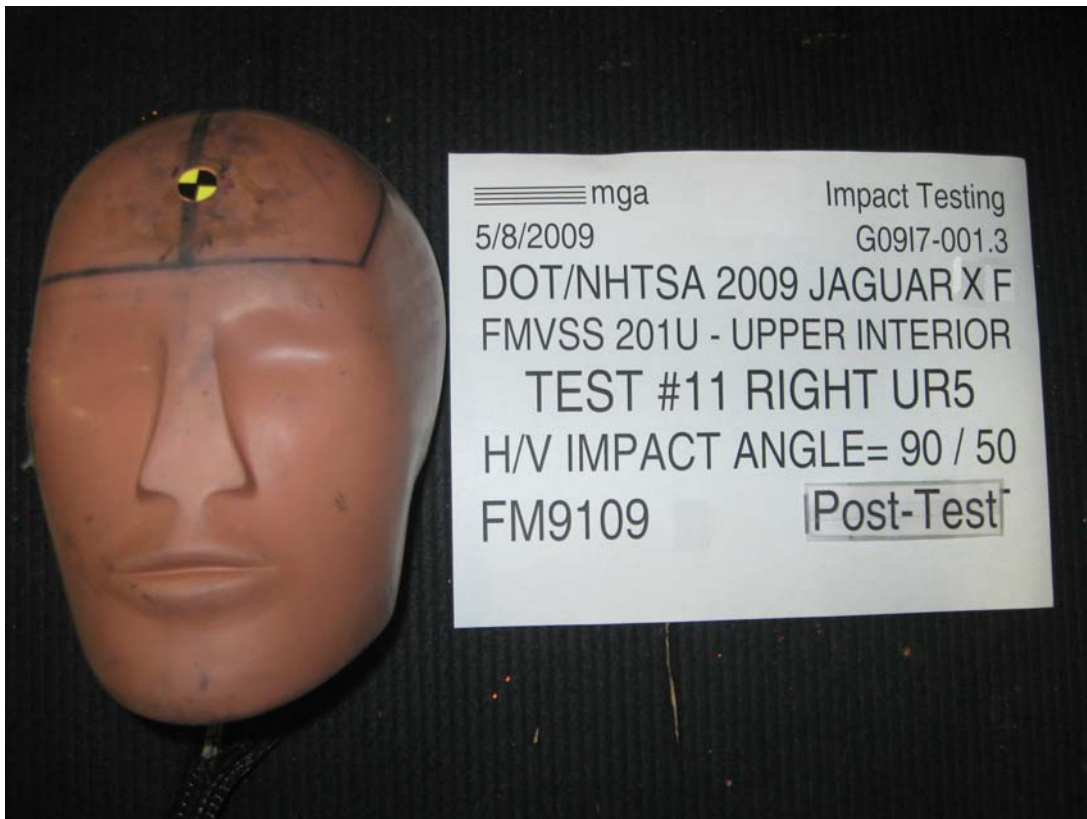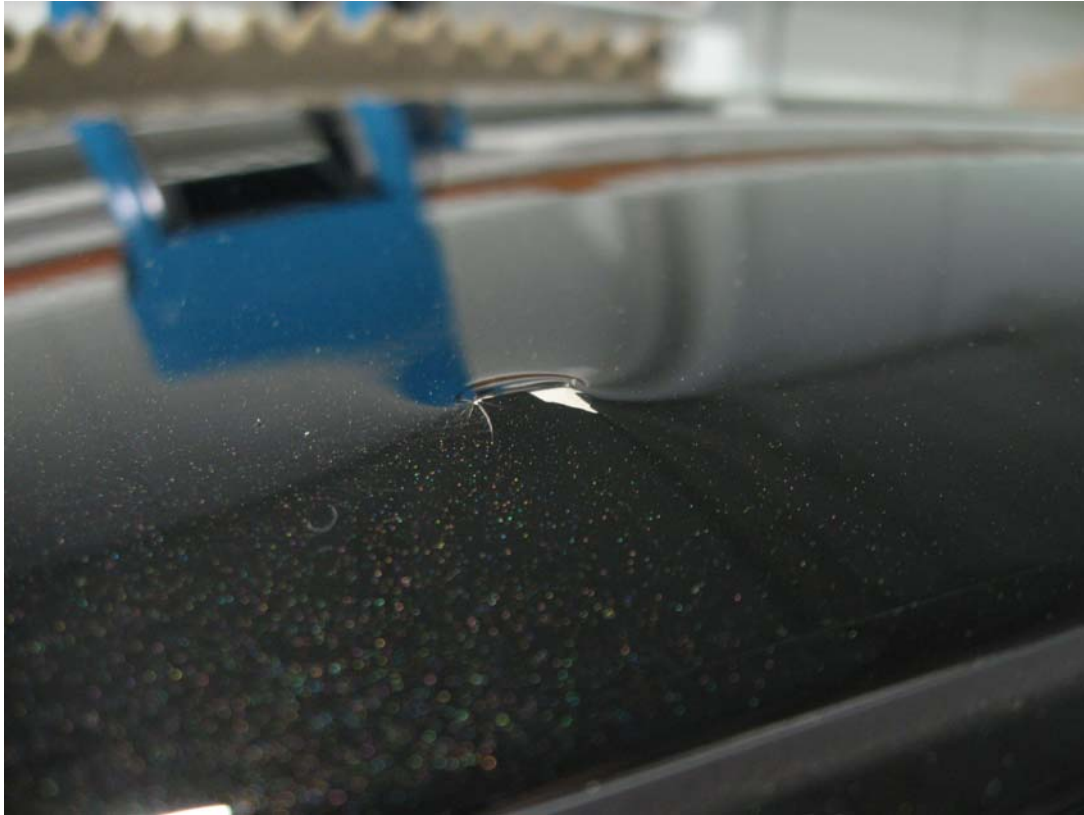

SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number:#11

Target (Vehicle Side): UR5Right

Temperature:20.7C

MGA Test Reference No.:FM9109

Humidity:55.0%

Approach Horizontal Angles:90°

Time of Test:3:14:34 PM

Approach Vertical Angles:50°

FMH Serial No:[037]

Additional Description:located above SR3-2

TEST RESULTS:



HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
818	863	7.7	24.1	27	2 Left

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	AHTB2	-115.9	1.05	1.05
Y	6	J14103	93.7	0.84	0.84
Z	7	J35800	97.1	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):



Headliner fastener protrusion visible on the vehicle body exterior roof.



Recorded By:  Approved By*:  Date: 5/8/2009
 *Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9109


Target Location: UR5, Right Side


Test Date: 5/8/2009

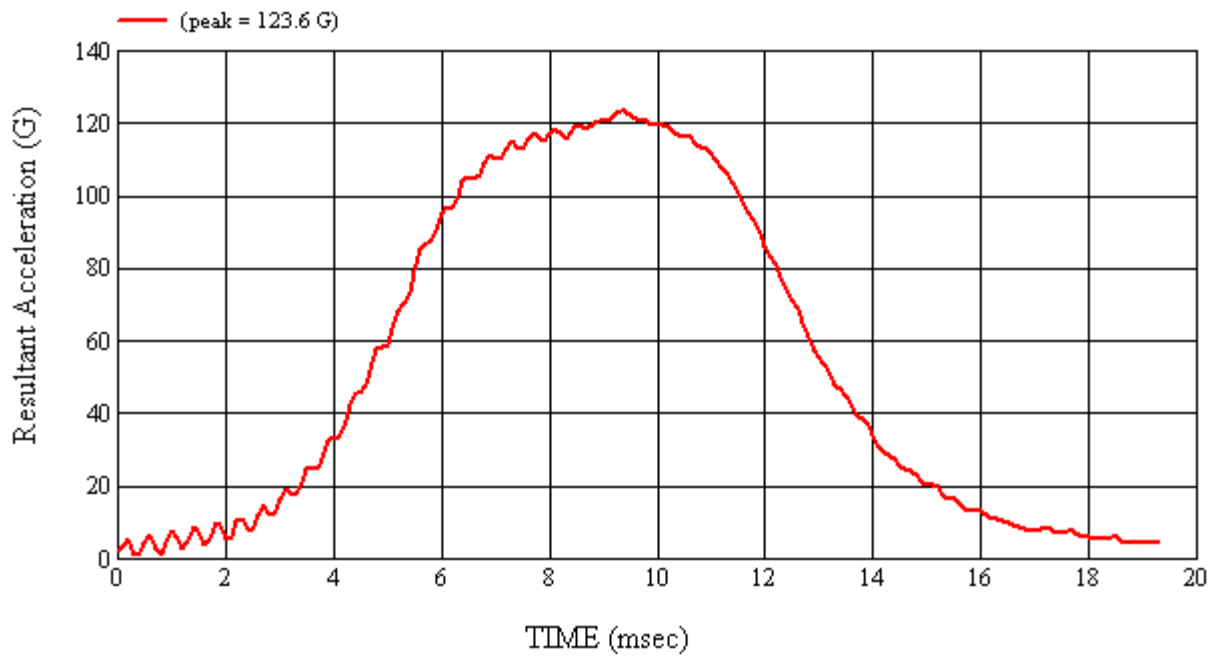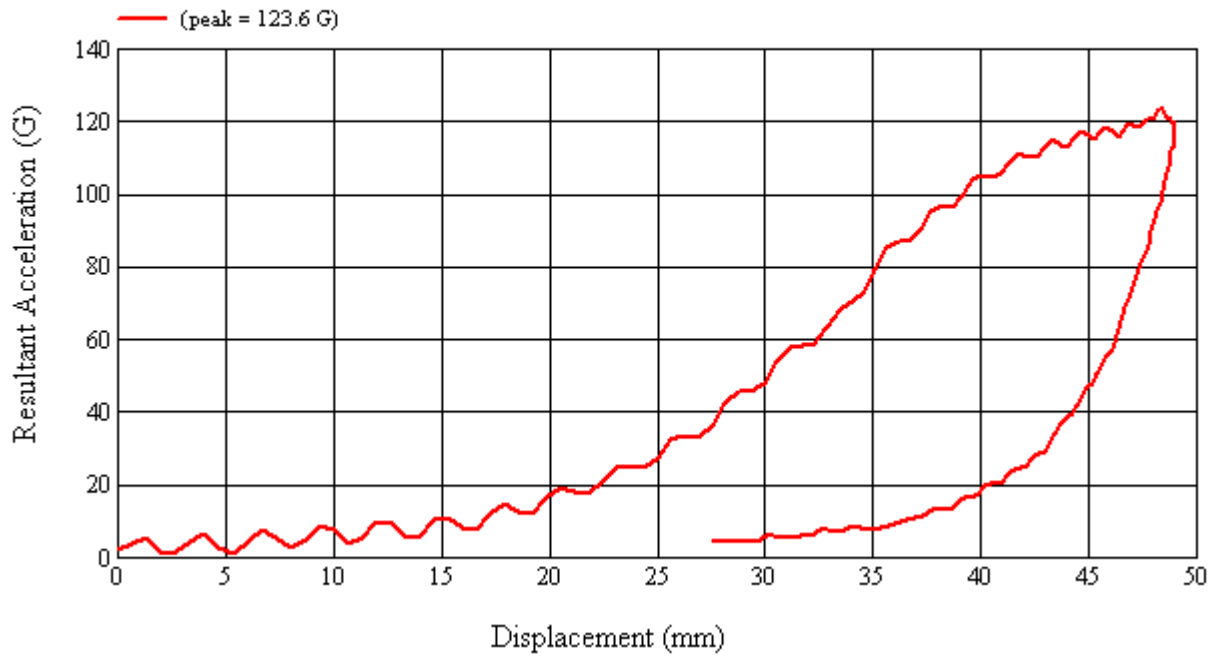


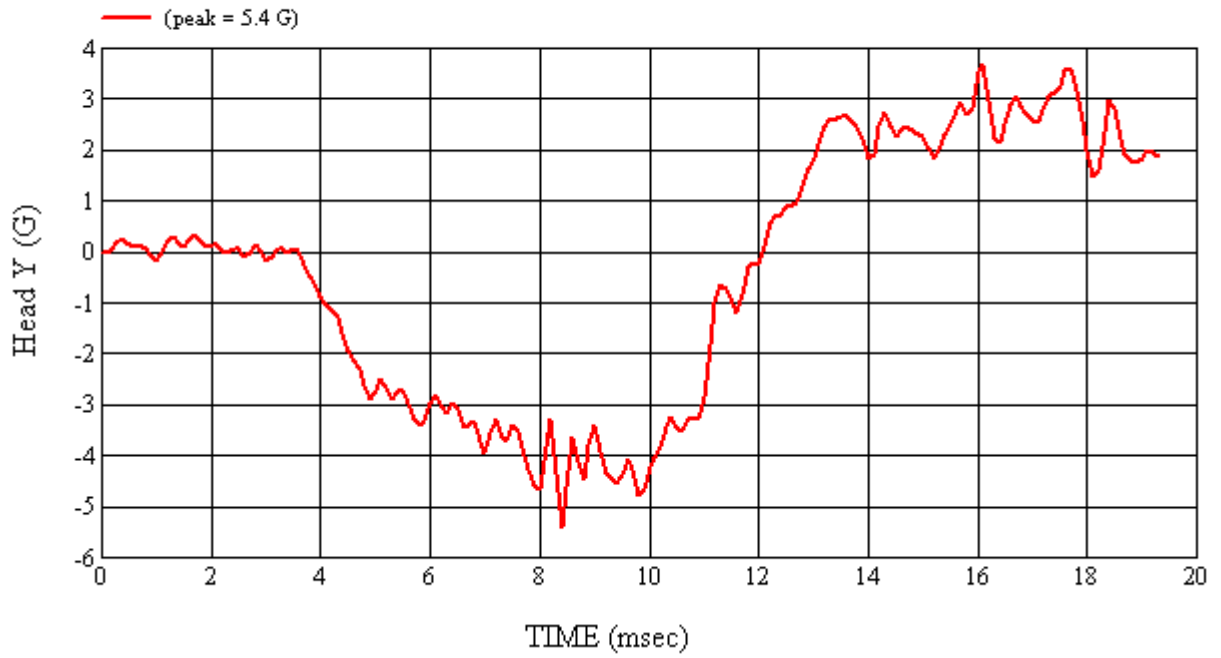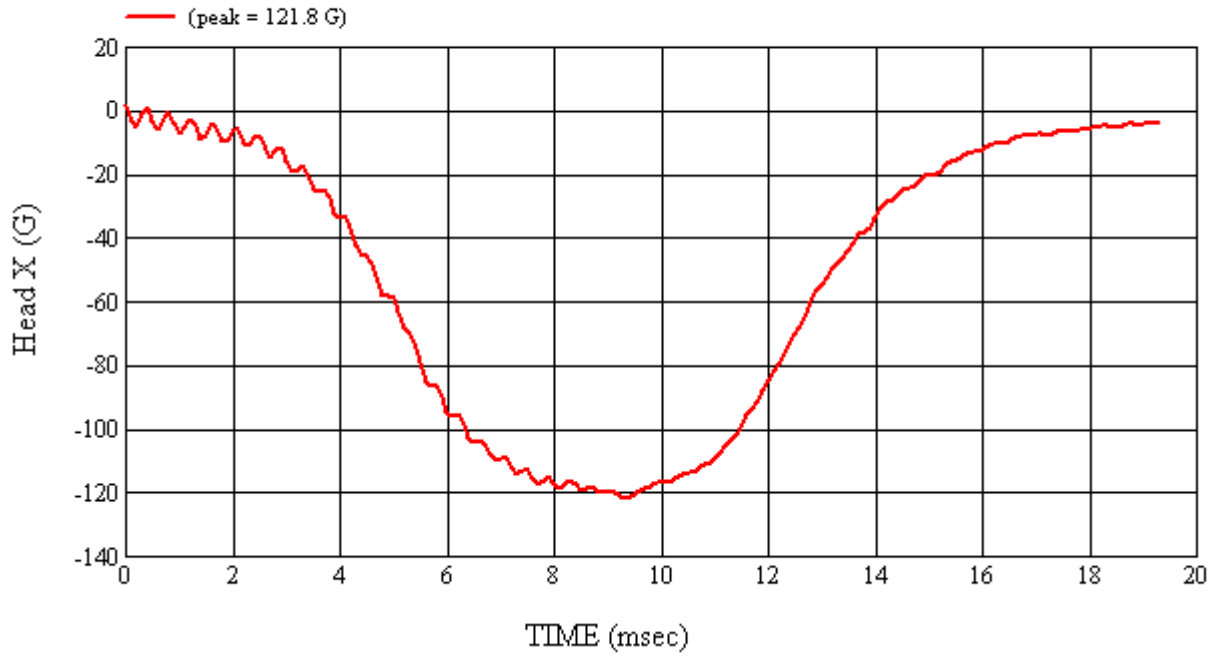

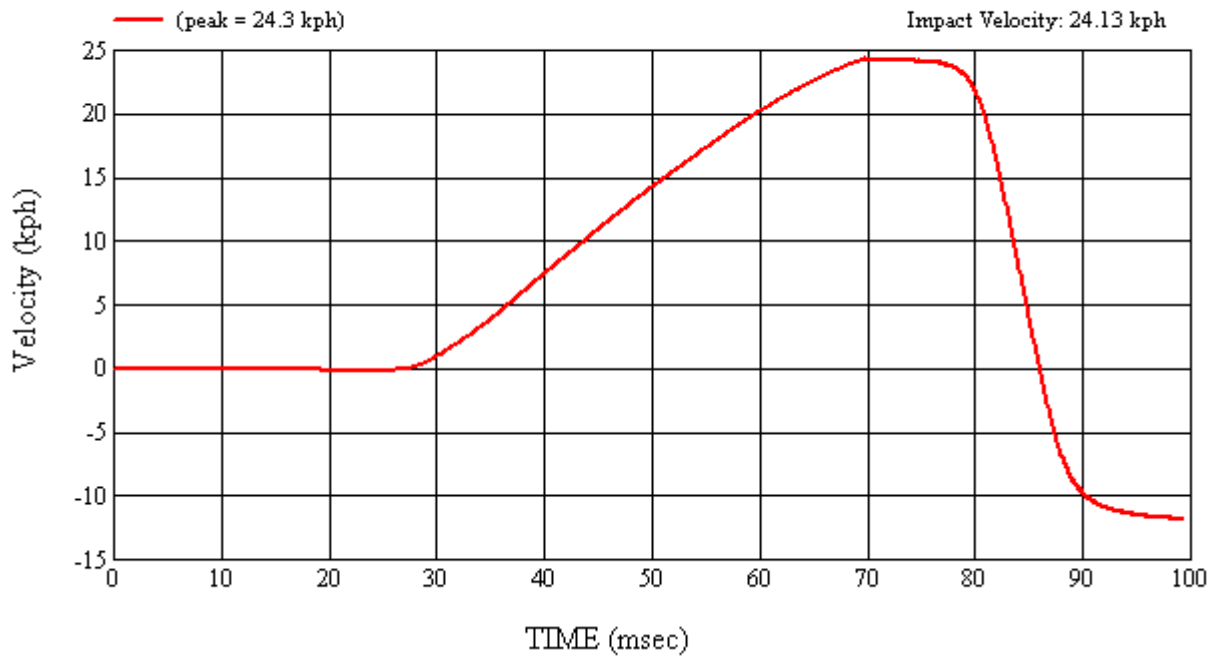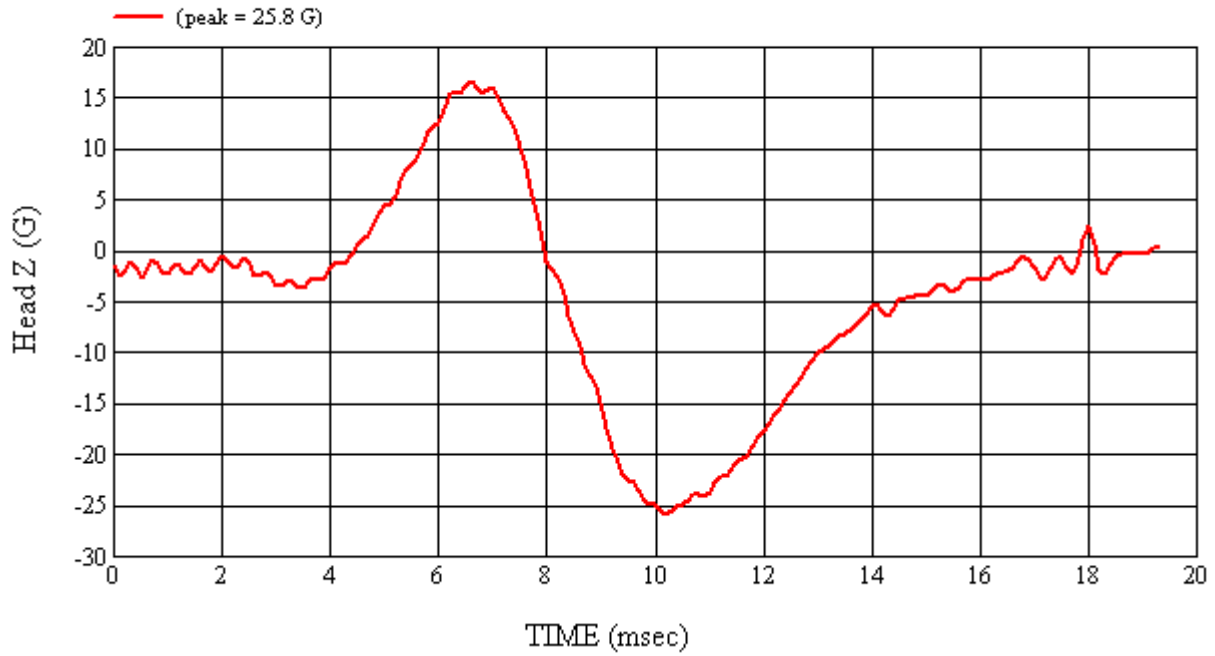

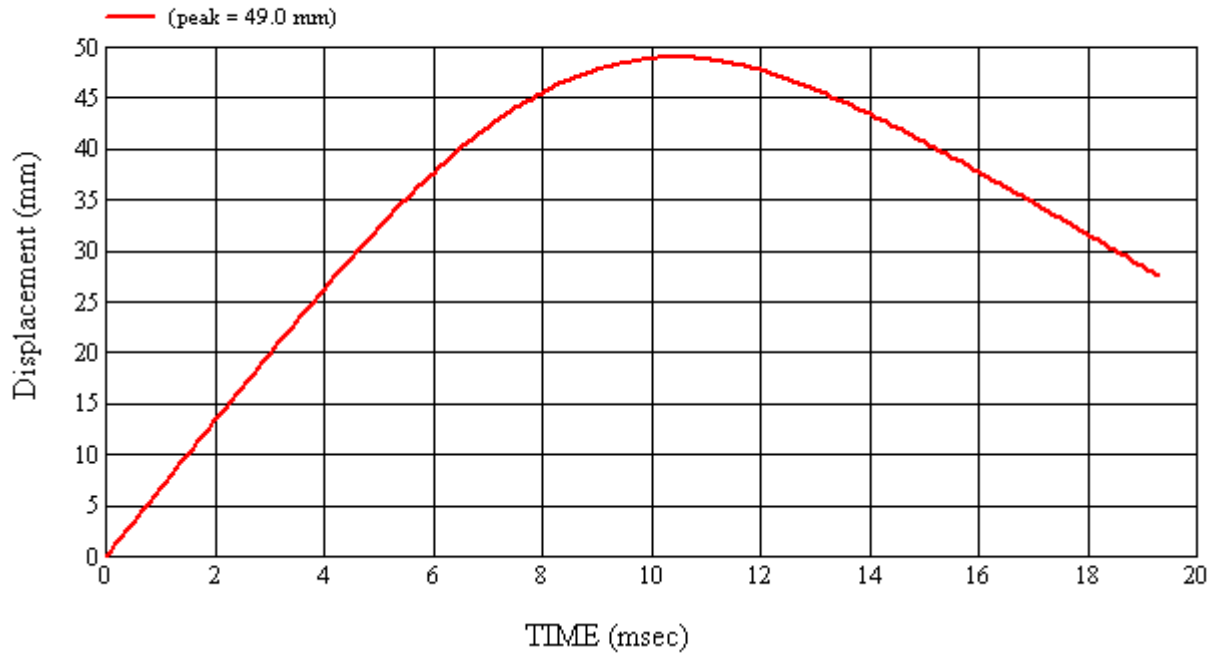

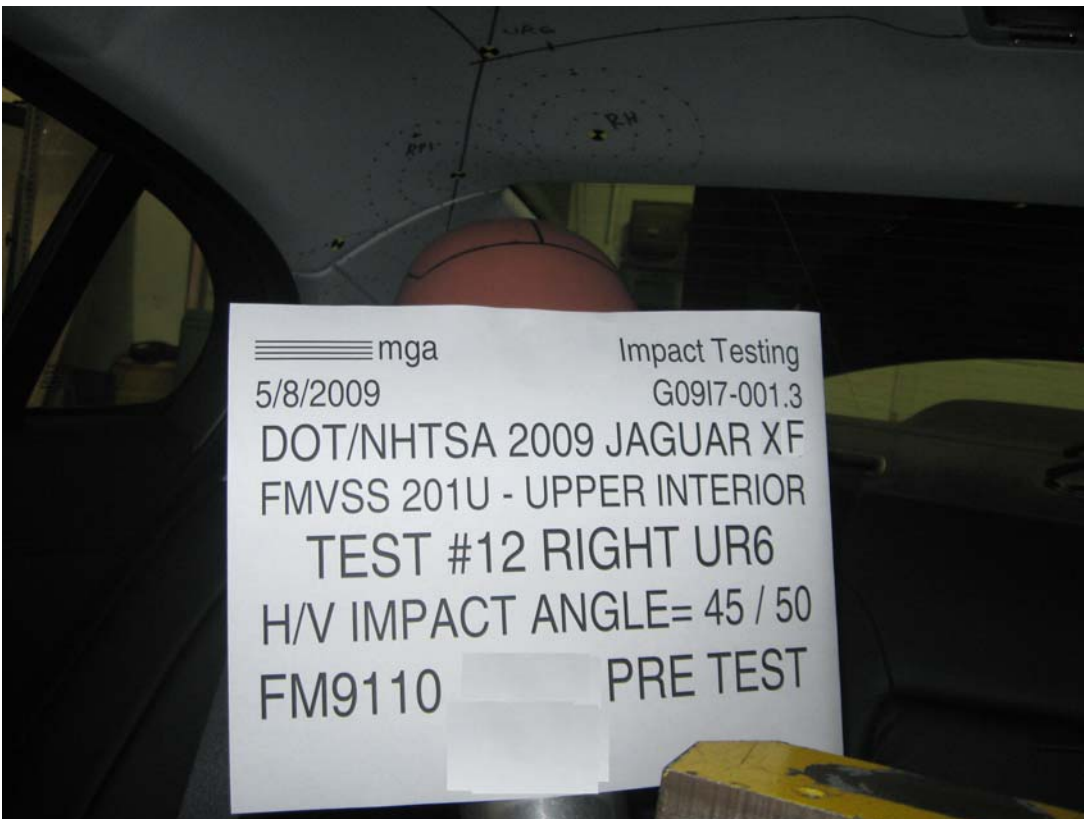

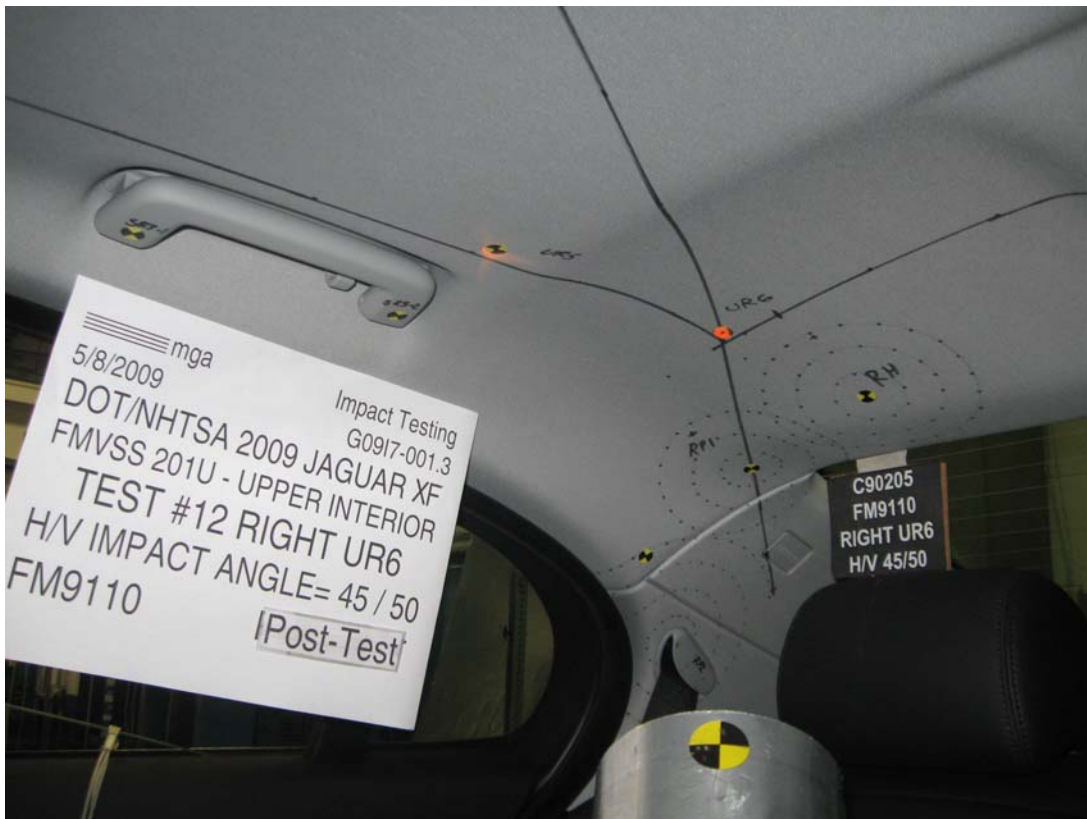



SUMMARY OF FMVSS 201U TEST

JOB/NHTSA NO: G09I7-001.3 VEHICLE YR/MAKE/MODEL:2009/DOT/NHTSA/Jaguar XF

GENERAL TEST PARAMETERS:

Test Number:#12

Target (Vehicle Side): UR6Right

Temperature:20.7C

MGA Test Reference No.:FM9110

Humidity:53.9%

Approach Horizontal Angles:45°

Time of Test:4:28:08 PM

Approach Vertical Angles:50°

FMH Serial No:[038]

Additional Description:located above rear pillar corner

TEST RESULTS:



HIC(d)	HIC	Δt (msec)	Velocity (kph)	Impact location on FMH (mm)	
				Above Pt. O	Left/Right Pt. O
793	830	8	23.8	22	3 Right

INSTRUMENTATION INFORMATION: (all accelerometers are Endevco 7264-2000)

Axis	Channel	Serial No.	DLR Value	ΔV Pre-Test	ΔV Post-Test
X	5	J22700	-94	1.05	1.05
Y	6	J36197	106.3	0.84	0.84
Z	7	J36353	97.5	0.93	0.93

REMARKS (Summary of test, damage, non-compliance, invalid test, etc.):



Headliner fastener protrusion visible on the vehicle body exterior roof.



Recorded By:  Approved By*:  Date: 5/8/2009
 *Only necessary for NHTSA (Government) Compliance testing.



MGA Test #: FM9110


Target Location: UR6, Right Side

Test Date: 5/8/2009

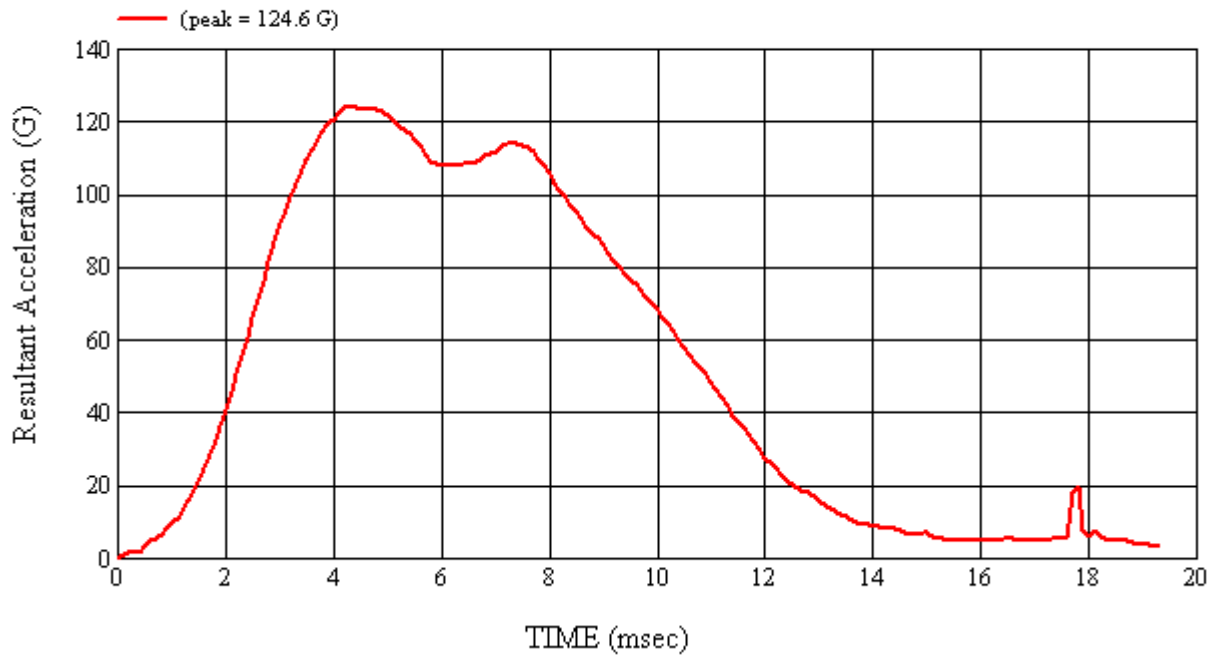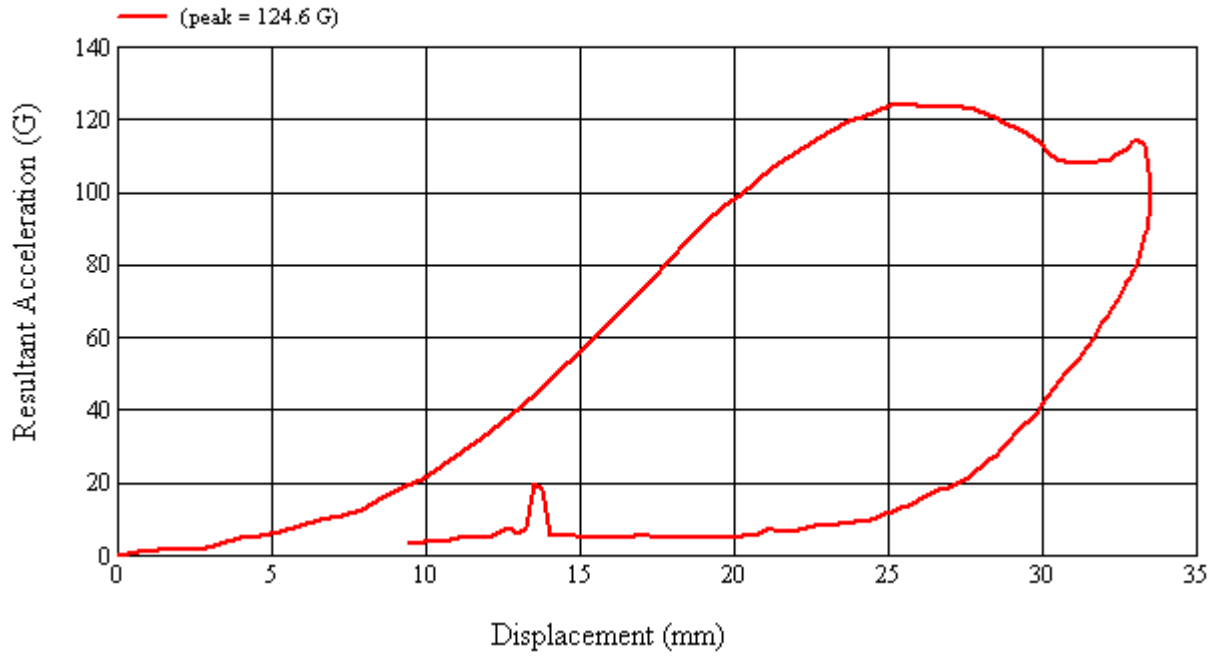

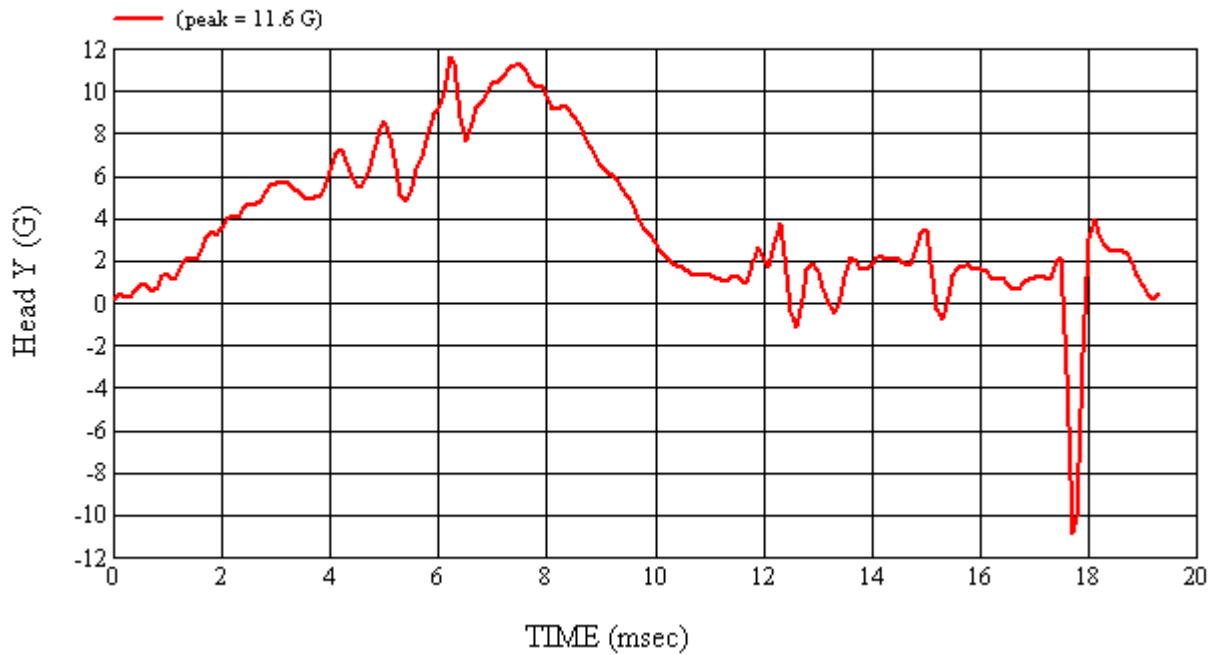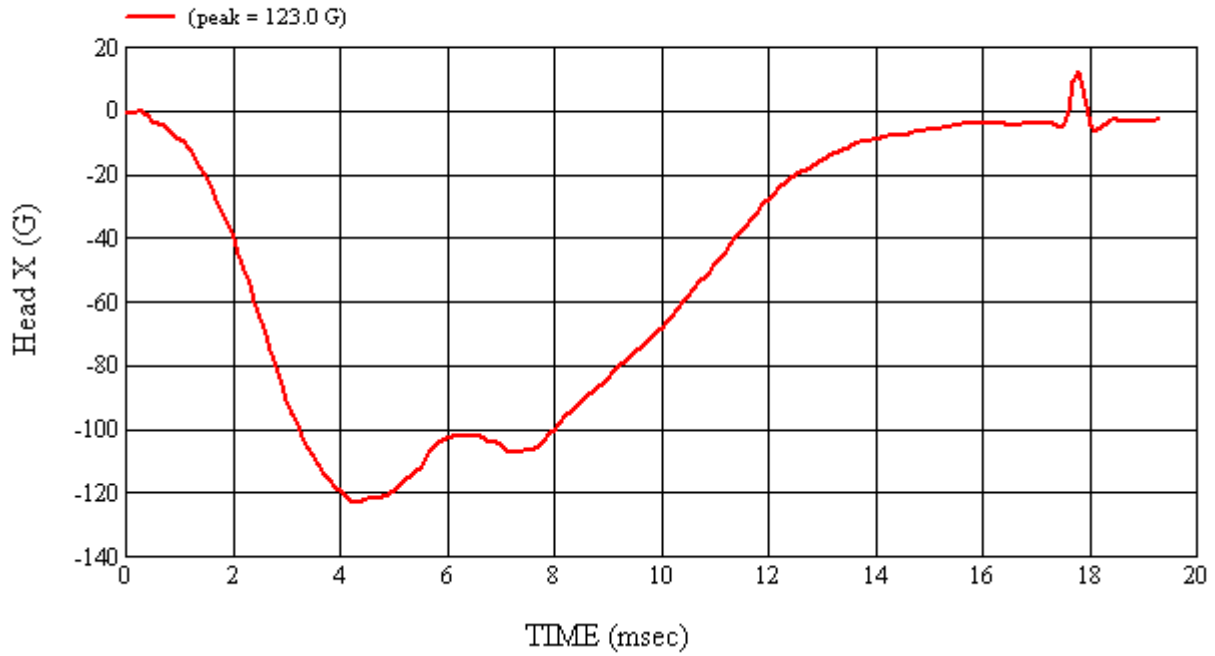

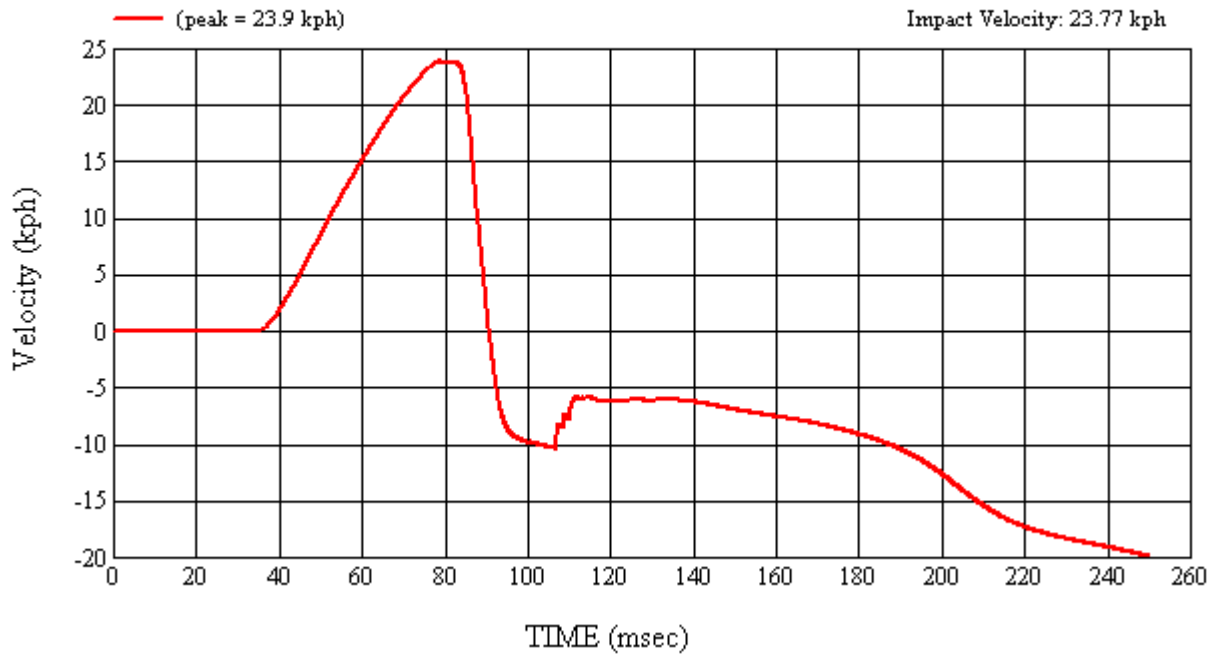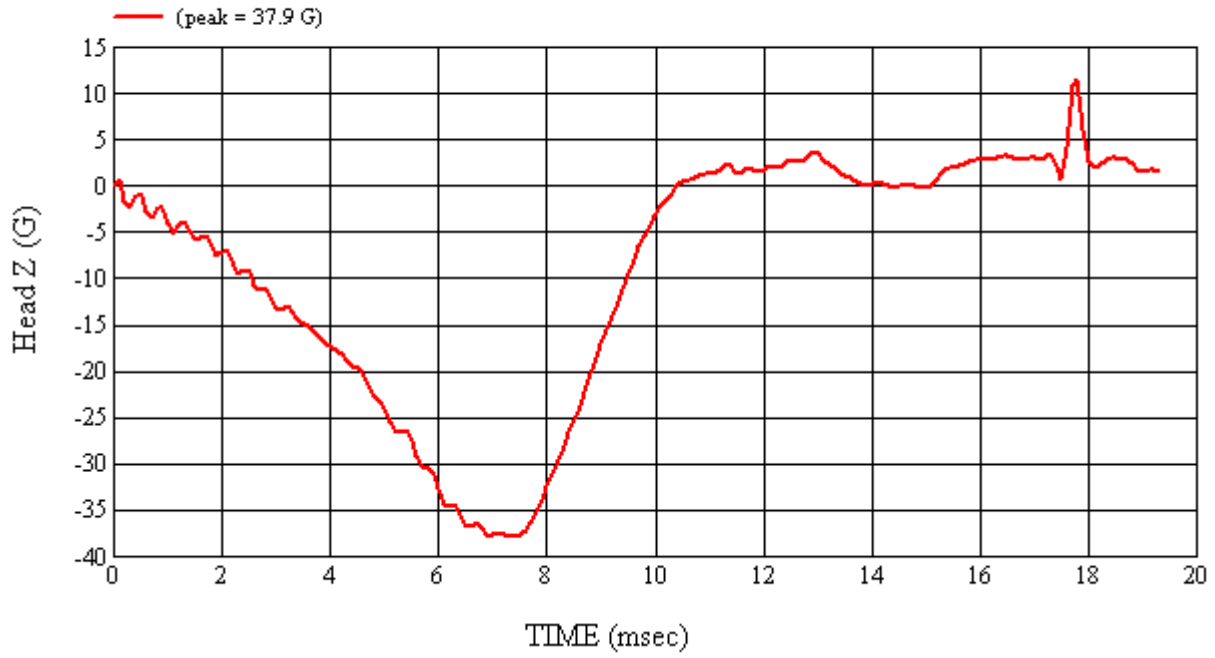

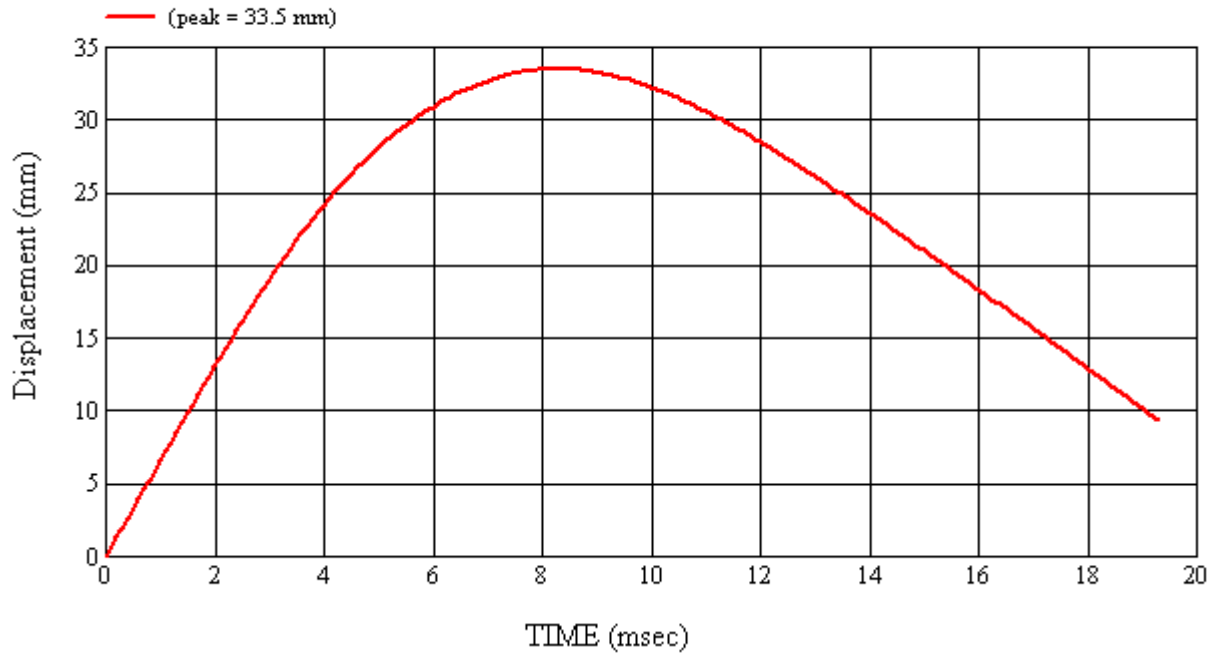

4.0 TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

The following section lists the test equipment for the compliance test series. Items marked with an asterisk are calibrated by an external lab. An additional summary table is given for the pre and post-test calibration data for the Free Motion Headforms. The temperature trace to confirm testing was conducted between 66°F and 78°F (19°C – 26°C) is included in Appendix A. Calibration certificates can be found in Appendix B.

TABLE 4-1 LIST OF ITEMS USED

ITEM	MANUFACTURER NAME	MODEL #	FUNCTION OF ITEM	ACCURACY	CAL. INTERNAL
Head Drop Tower (includes test frame and DAS)	MGA Research Corp.	MGA-100-DC	FMH Calibration	N/A	N/A
Accelerometers	Endevco	7264-2000	Acceleration Data	±0.5%	6 months
*Digital Inclinator	Mitutoyo	PRO 360 (MGA00730)	Set Angle of FMH/Targeting	0.1°	Annual
FMVSS 201U Test Frame (includes the propulsion control system, actuator, test frame, and DAS)	MGA Research Corp.	MGA-100-FMH	Test System	N/A	N/A
Free Motion Headforms	UTAMA UTAMA UTAMA	035 037 038	Test Device	N/A	Pre and Post-Test Series
High Speed Video	Vision Research	Miro	Record Event	N/A	N/A
*FARO™	Faro Technologies	S08059801273	Targeting	0.1 mm	Annual
Measuring Devices: - Tape Measure - Plumb Bobs - Digital Protractor	Stanley N/A Mitutoyo	TPM906 -- MGA00730	Measurement Targeting FMH setup Horizontal Measurement	1 mm N/A 0.5°	Annual
*Temperature Recorder	Dickson	MGA00152	Record Temperature and Humidity	± 1°C ± 1% RH	Annual
* Scale	Detecto	MGA00081	Weigh FMH Head	± 0.01 lb	Annual
*Vehicle Scale	Sterling Scale Co.	26032389	Weighing Vehicle	± .5 kg	Annual

Each headform was calibrated by an engineer after the headform had soaked in an environment of 66°F to 78°F (19°C to 26°C) for a period of at least four hours.

Each headform was found to comply with the performance criteria under Part 572L for pre and post-test calibrations. That is, the peak resultant acceleration was between 225 and 275 G's, the peak lateral acceleration was less than 15 G's, the headform weighed between 9.9 and 10.1 lbs., the pulse was determined to be unimodal, and there was no major damage to the headform.

TABLE 4-2 FMH CALIBRATION SUMMARY

FMH Serial #		Headform Calibration Date	Weight (lbs)	Temp (°C)	% Humidity	Peak Resultant Acceleration (G's)	Peak Lateral Acceleration (G's)	Unimodal
Pre	#035	5/6/2009	9.90	21.6	49.9	239.0	4.7	Yes
Post	#035	5/12/2009	9.90	20.6	40.1	245.6	4.0	Yes
Pre	#037	5/6/2009	9.96	21.6	49.9	255.7	4.2	Yes
Post	#037	5/12/2009	9.96	20.6	40.1	252.3	4.0	Yes
Pre	#038	5/6/2009	9.90	21.6	49.9	252.2	11.1	Yes
Post	#038	5/12/2009	9.90	20.6	40.1	254.1	12.2	Yes

4-1 Pre-Test Calibration

**HEAD DROP TEST SUMMARY
 PART 572L**

HEADFORM SERIAL NUMBER: 035		CALIBRATION DATE: 5/6/2009
CALIBRATION TIME: 5:44:55 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	21.6
Relative Humidity	10% to 70%	49.9
Peak Resultant Acceleration	225 G's to 275 G's	239.0
Peak Lateral Acceleration	15 G's Maximum	4.7
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J35919	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J22664	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35924	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/6/2009


APPROVED BY: 

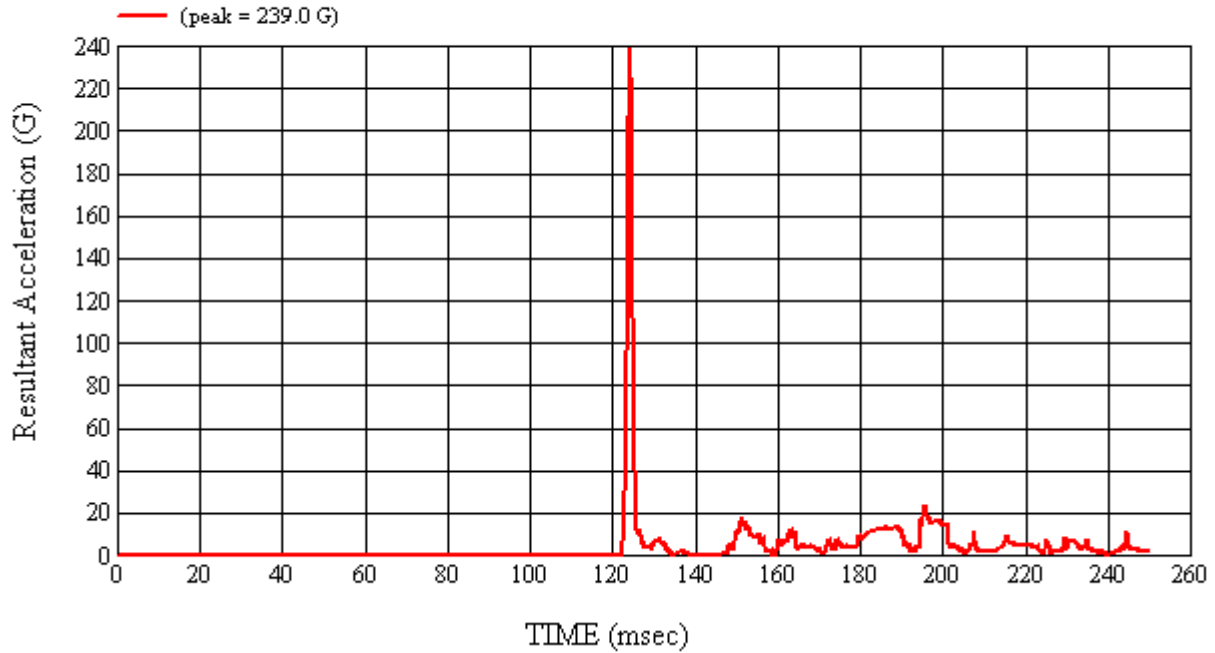


Head 035 (Pre) Calibration #H35011

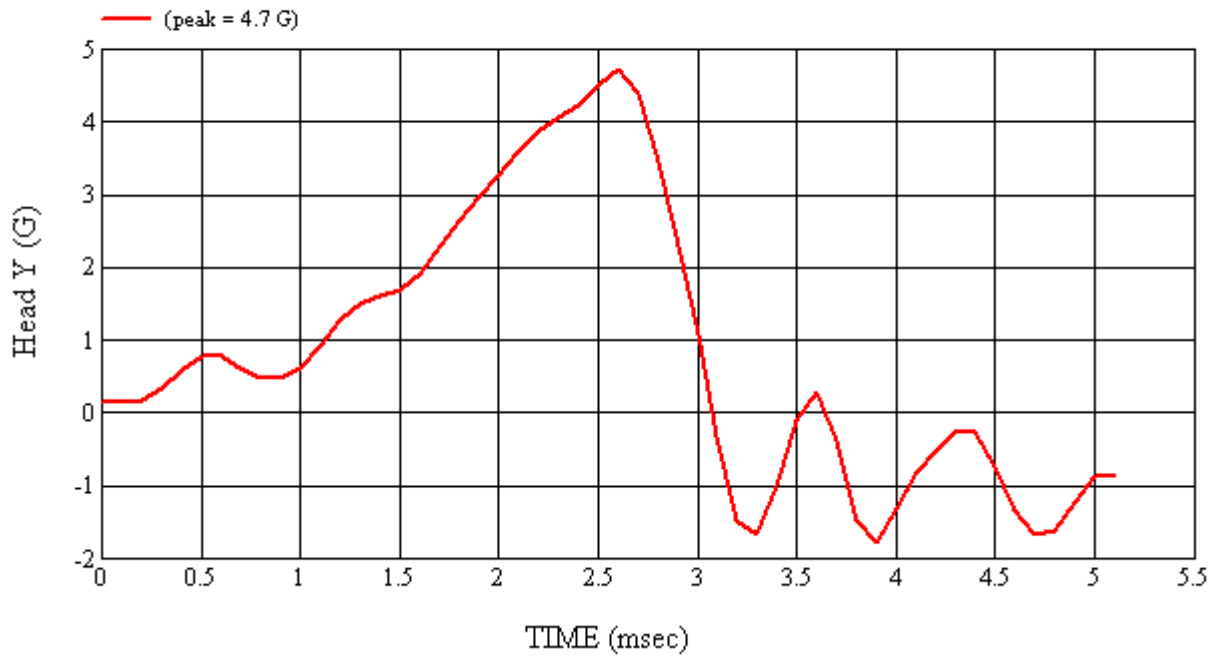

Head 035 (Pre) Calibration #H35011

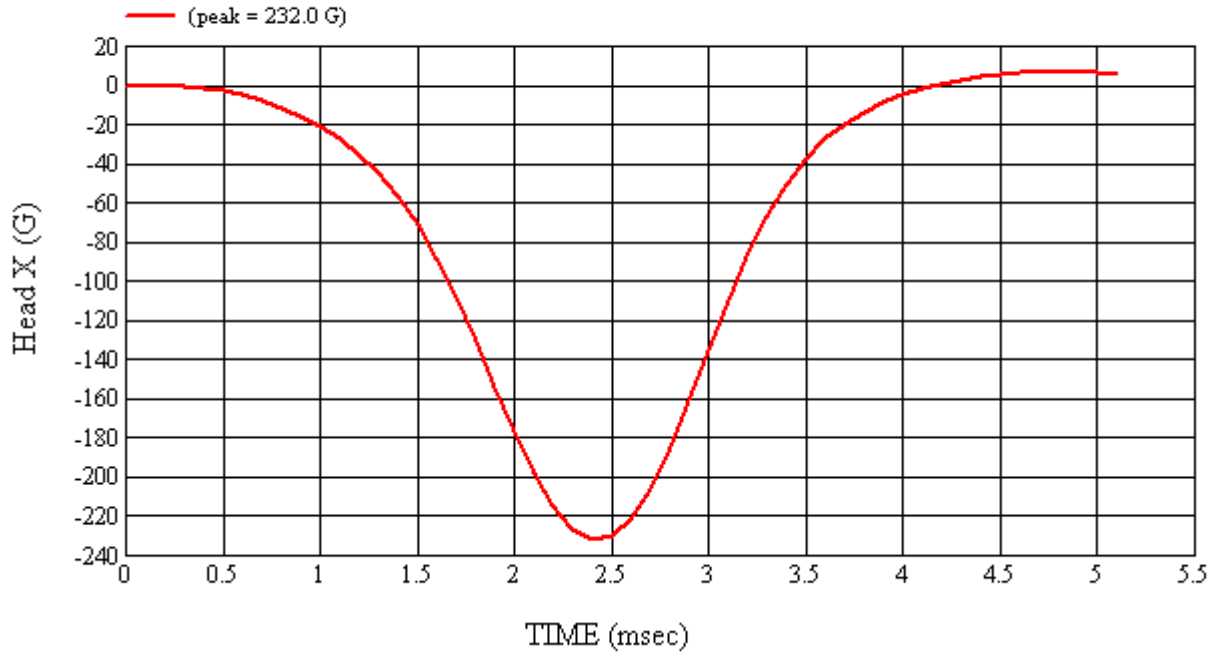

Head 035 (Pre) Calibration #H35011

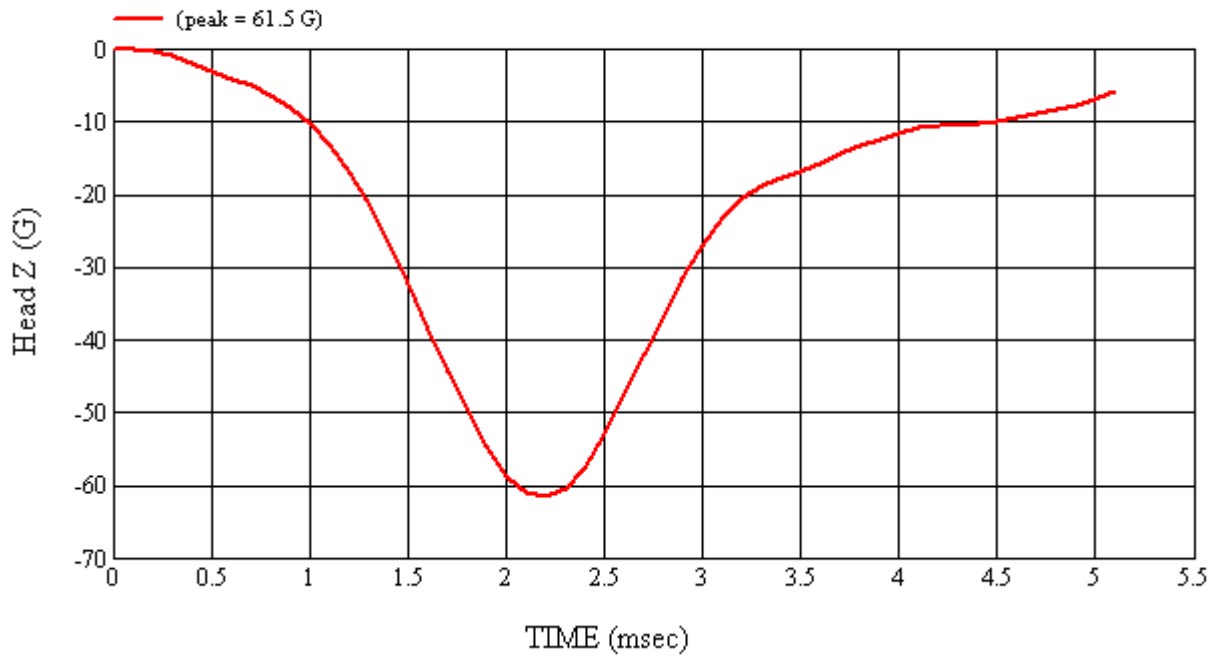

Head 035 (Pre) Calibration #H35011

4-2 Post-Test Calibration

**HEAD DROP TEST SUMMARY
 PART 572L**

HEADFORM SERIAL NUMBER: 035		CALIBRATION DATE: 5/12/2009
CALIBRATION TIME: 10:10:18 AM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	20.6
Relative Humidity	10% to 70%	40.1
Peak Resultant Acceleration	225 G's to 275 G's	245.6
Peak Lateral Acceleration	15 G's Maximum	4.0
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J35919	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J22664	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35924	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/12/2009


APPROVED BY: 

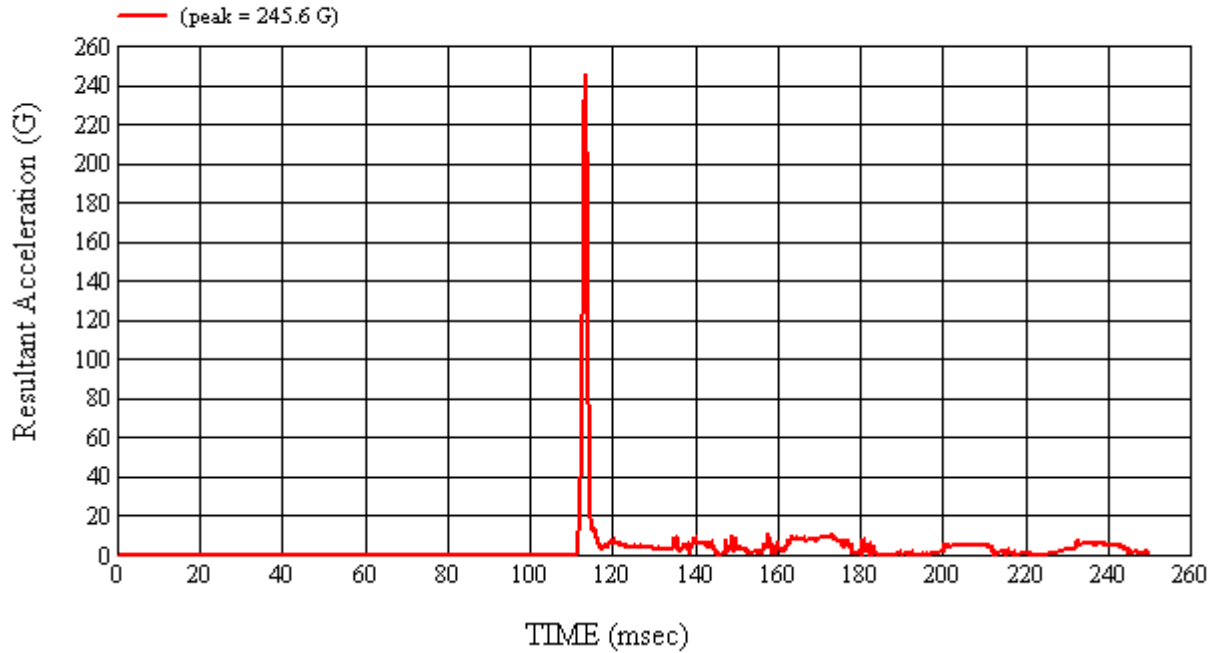


Head 035 (Post) Calibration #H35012

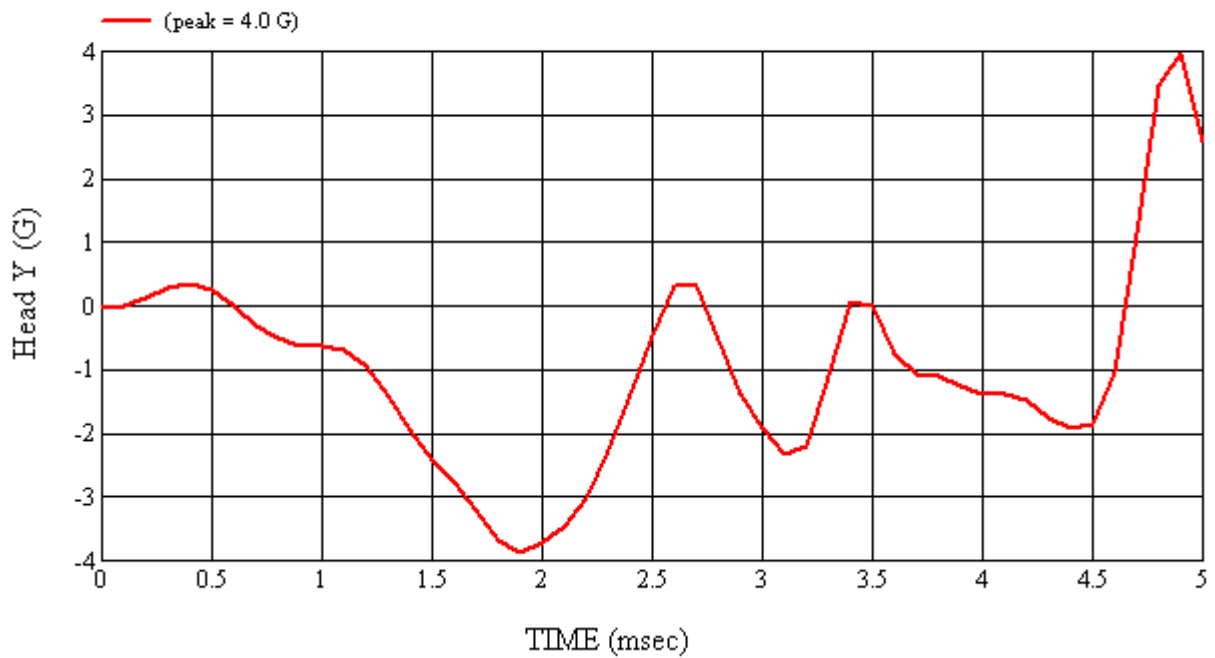

Head 035 (Post) Calibration #H35012

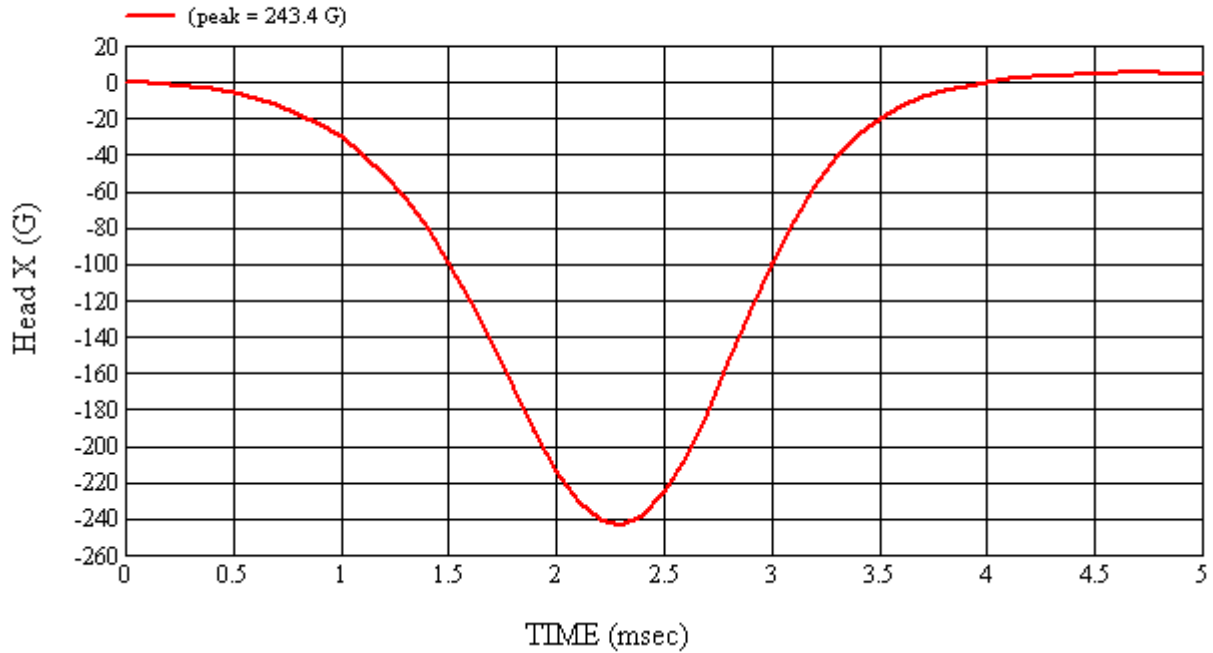

Head 035 (Post) Calibration #H35012

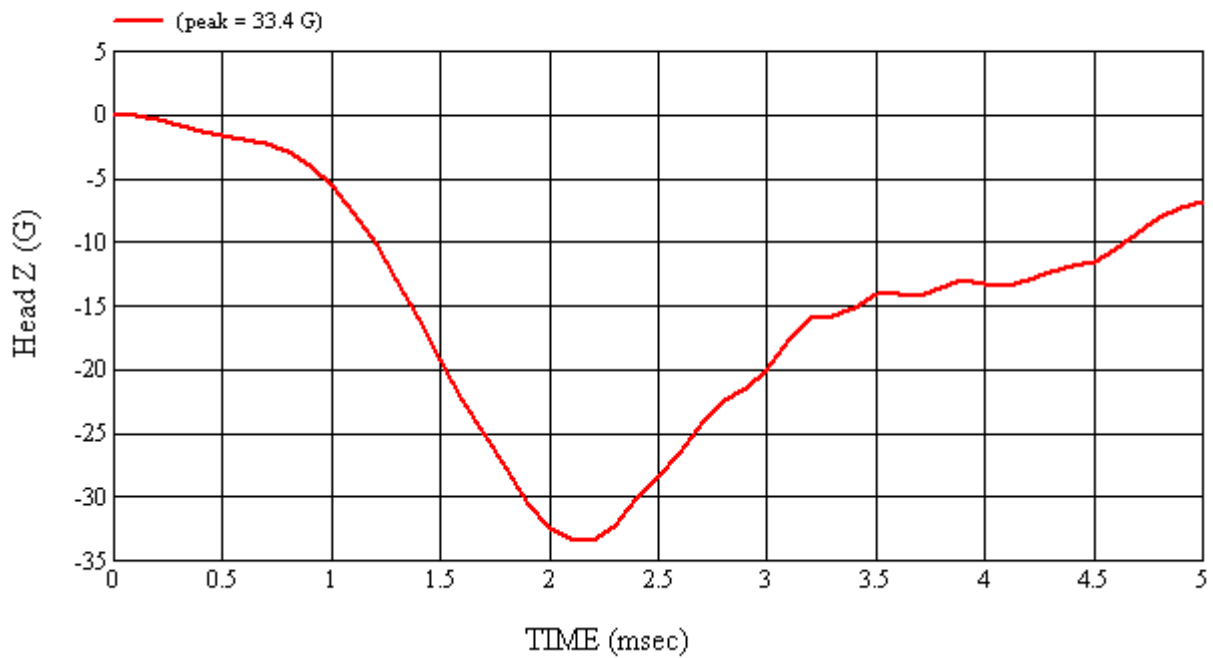

Head 035 (Post) Calibration #H35012

4-3 Pre-Test Calibration

**HEAD DROP TEST SUMMARY
 PART 572L**

HEADFORM SERIAL NUMBER: 037		CALIBRATION DATE: 5/6/2009
CALIBRATION TIME: 5:34:29 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.96
Temperature	19° C to 26° C	21.6
Relative Humidity	10% to 70%	49.9
Peak Resultant Acceleration	225 G's to 275 G's	255.7
Peak Lateral Acceleration	15 G's Maximum	4.2
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	AHTB2	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J14103	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35800	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/6/2009


APPROVED BY: 

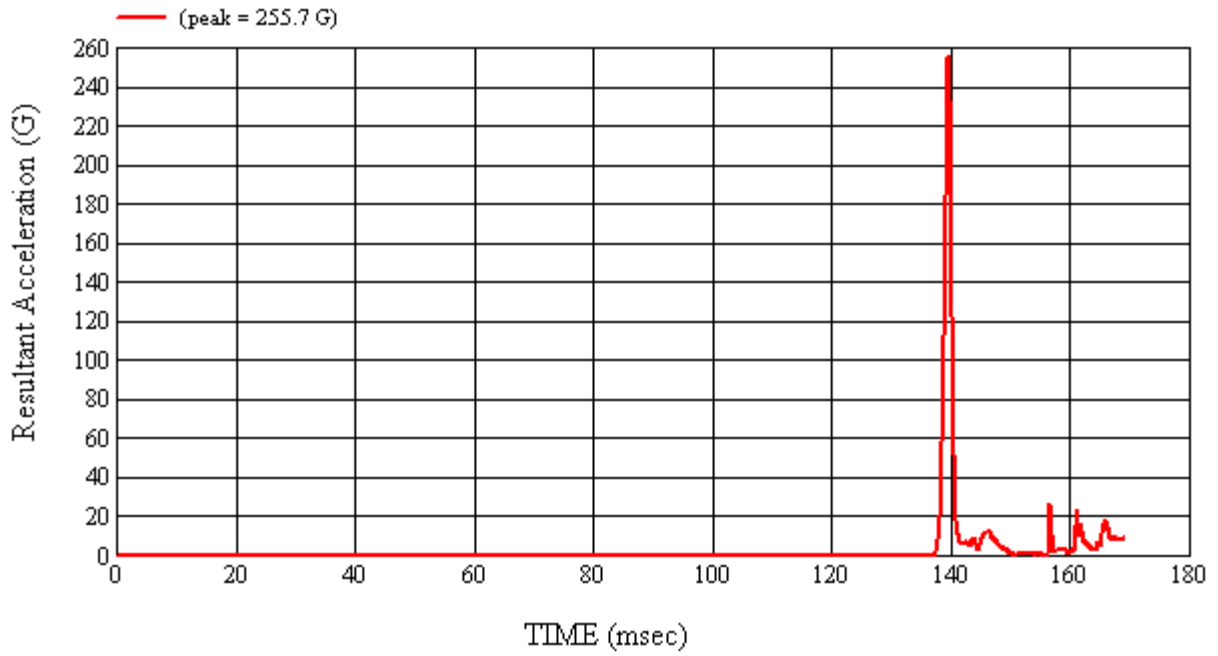


Head 037 (Pre) Calibration #H37011

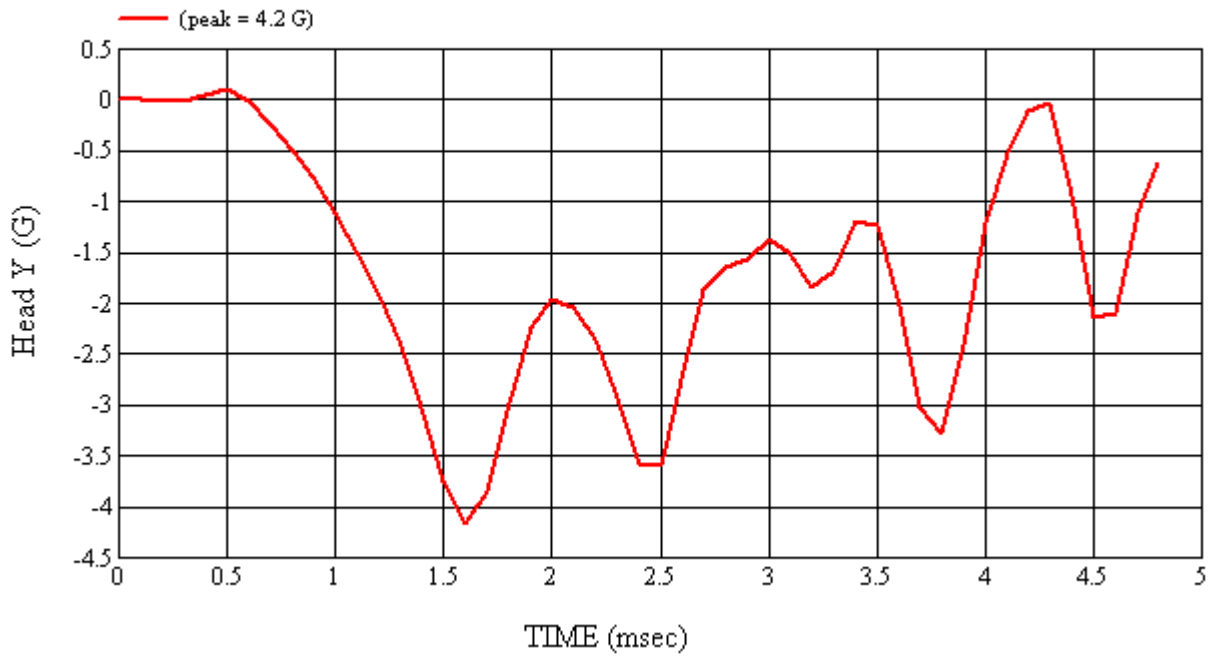

Head 037 (Pre) Calibration #H37011

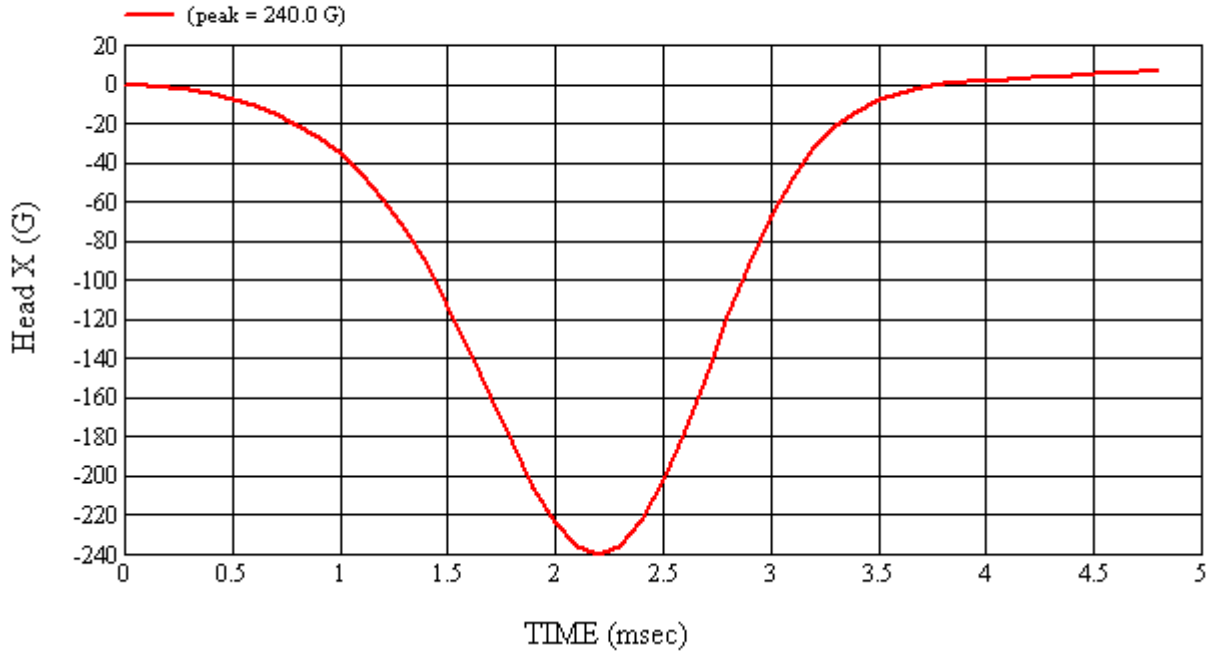

Head 037 (Pre) Calibration #H37011

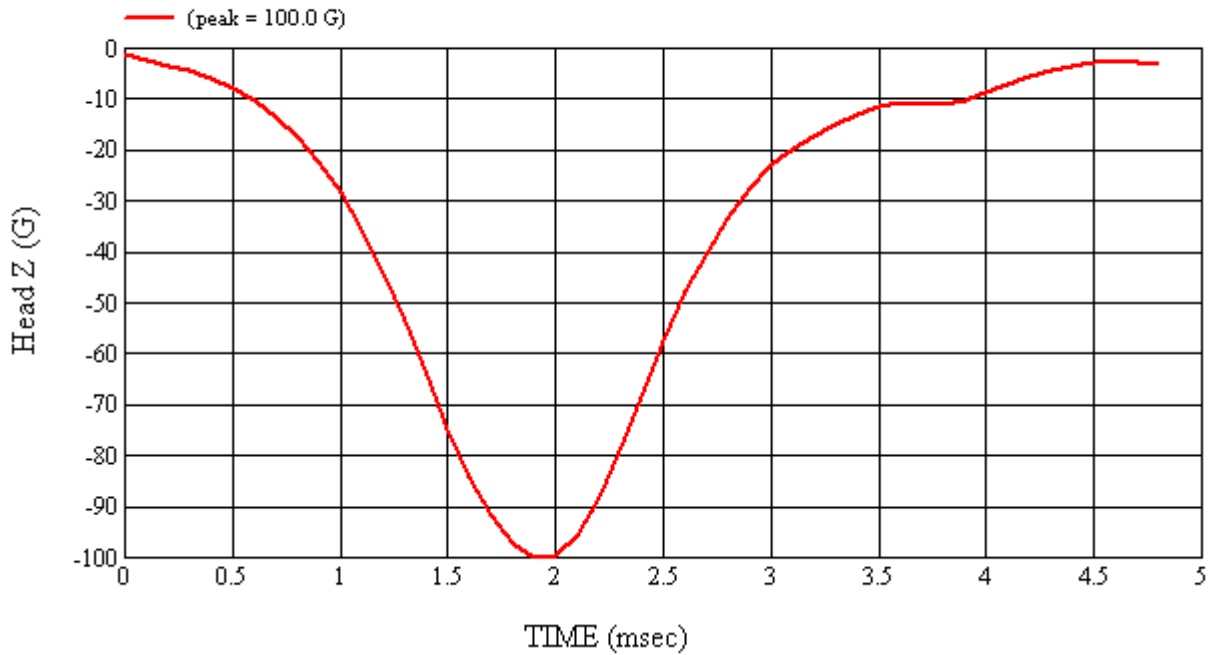

Head 037 (Pre) Calibration #H37011

4-4 Post-Test Calibration

**HEAD DROP TEST SUMMARY
 PART 572L**

HEADFORM SERIAL NUMBER: 037		CALIBRATION DATE: 5/12/2009	
CALIBRATION TIME: 9:43:47 AM			
TEST PARAMETER	SPECIFICATION	TEST RESULTS	
Weight	9.90 to 10.10 lbs.	9.96	
Temperature	19° C to 26° C	20.6	
Relative Humidity	10% to 70%	40.1	
Peak Resultant Acceleration	225 G's to 275 G's	252.3	
Peak Lateral Acceleration	15 G's Maximum	4.0	
Unimodal Acceleration Curve	YES	YES	


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	AHTB2	03/02/09	09/02/09
2	ENDEVCO	7264-2000	J14103	03/02/09	09/02/09
3	ENDEVCO	7264-2000	J35800	03/02/09	09/02/09

REMARKS:


RECORDED BY: 

DATE: 5/12/2009


APPROVED BY: 

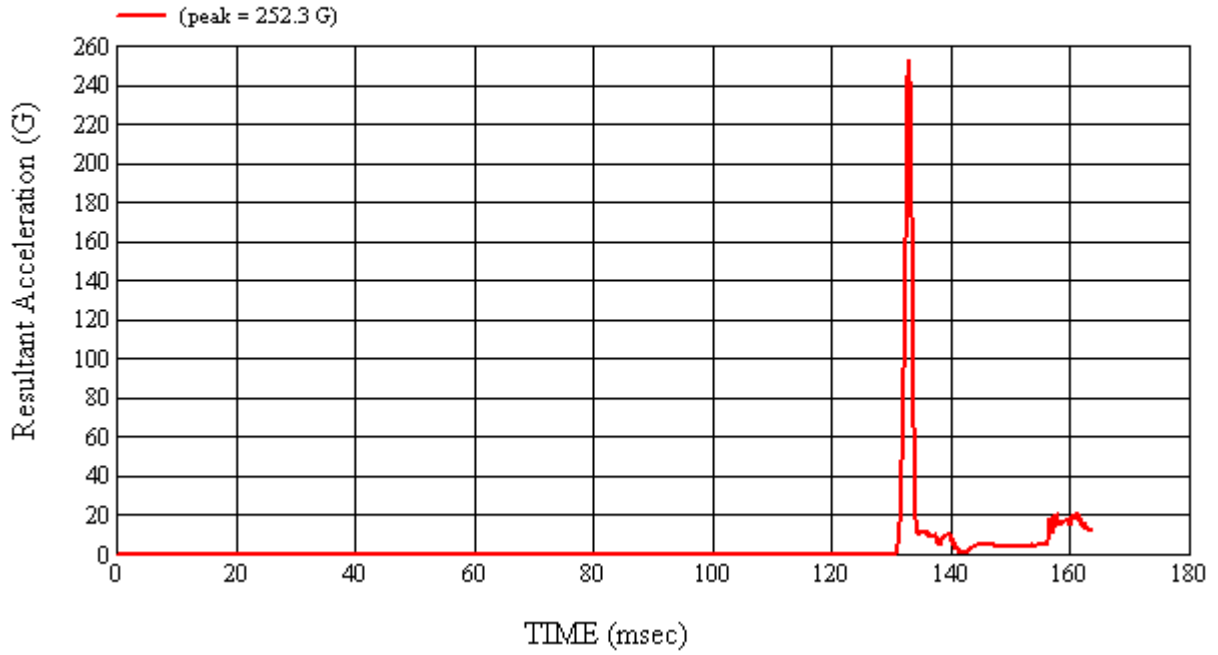


Head 037 (Post) Calibration #H37012

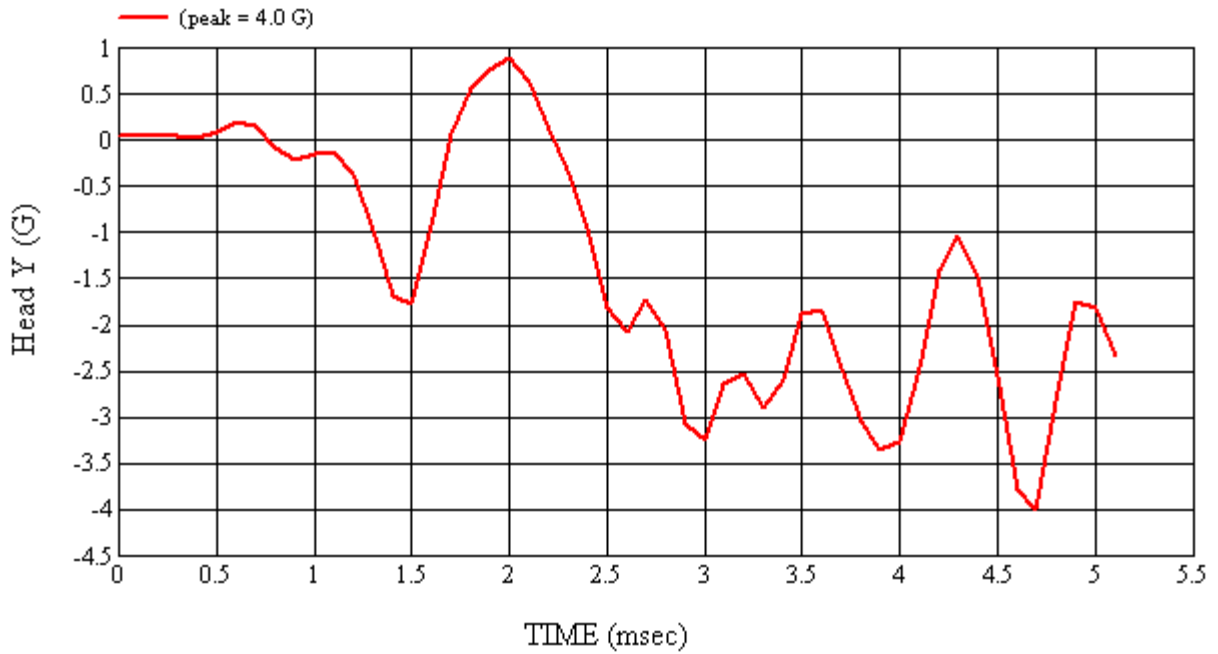

Head 037 (Post) Calibration #H37012

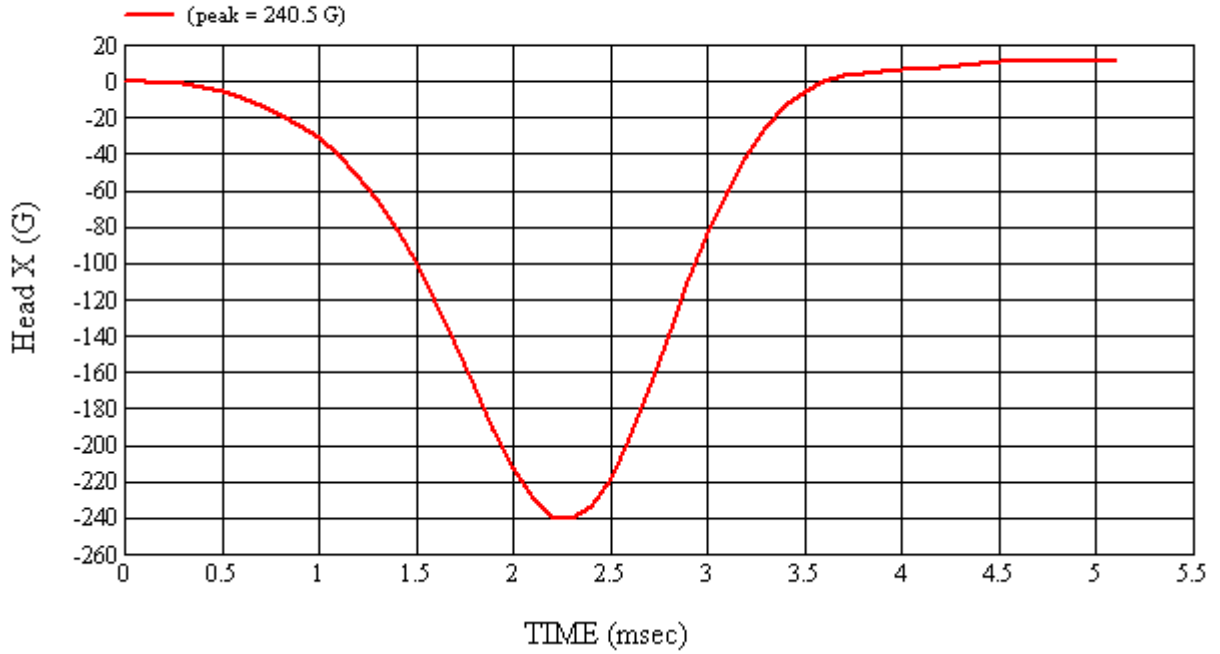

Head 037 (Post) Calibration #H37012

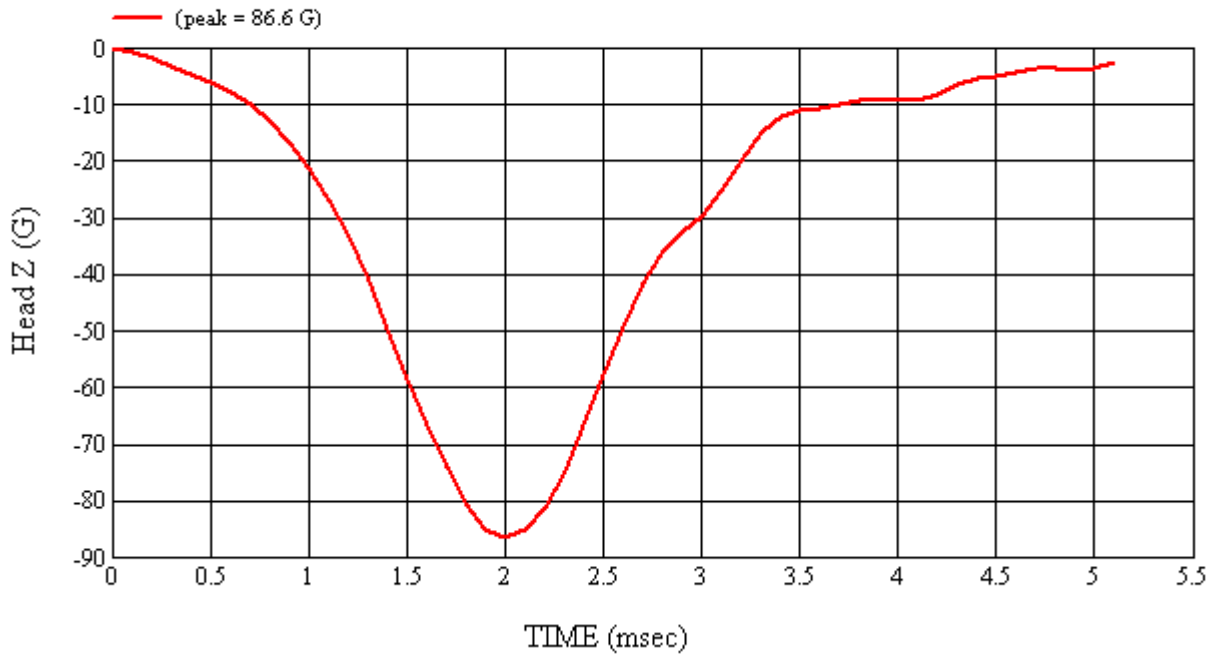

Head 037 (Post) Calibration #H37012

4-5 Pre-Test Calibration

**HEAD DROP TEST SUMMARY
 PART 572L**

HEADFORM SERIAL NUMBER: 038		CALIBRATION DATE: 5/6/2009
CALIBRATION TIME: 5:20:49 PM		
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	21.6
Relative Humidity	10% to 70%	49.9
Peak Resultant Acceleration	225 G's to 275 G's	252.2
Peak Lateral Acceleration	15 G's Maximum	11.1
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J22700	04/17/09	10/17/09
2	ENDEVCO	7264-2000	J36197	04/17/09	10/17/09
3	ENDEVCO	7264-2000	J36353	04/17/09	10/17/09

REMARKS:


RECORDED BY: 

DATE: 5/6/2009


APPROVED BY: 

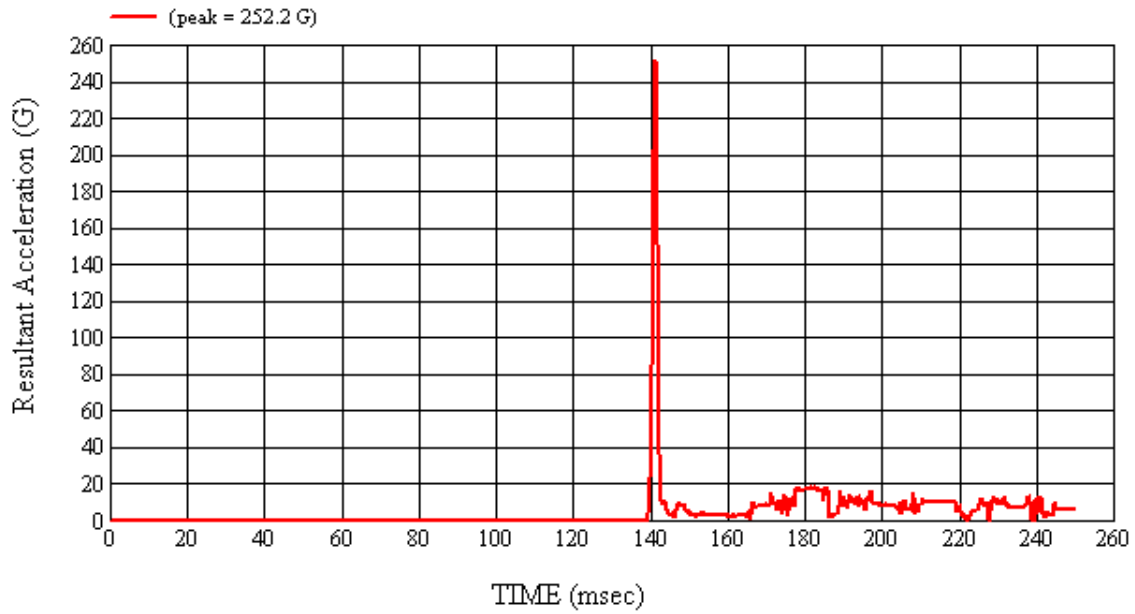


Head 038 (Pre) Calibration #H38011

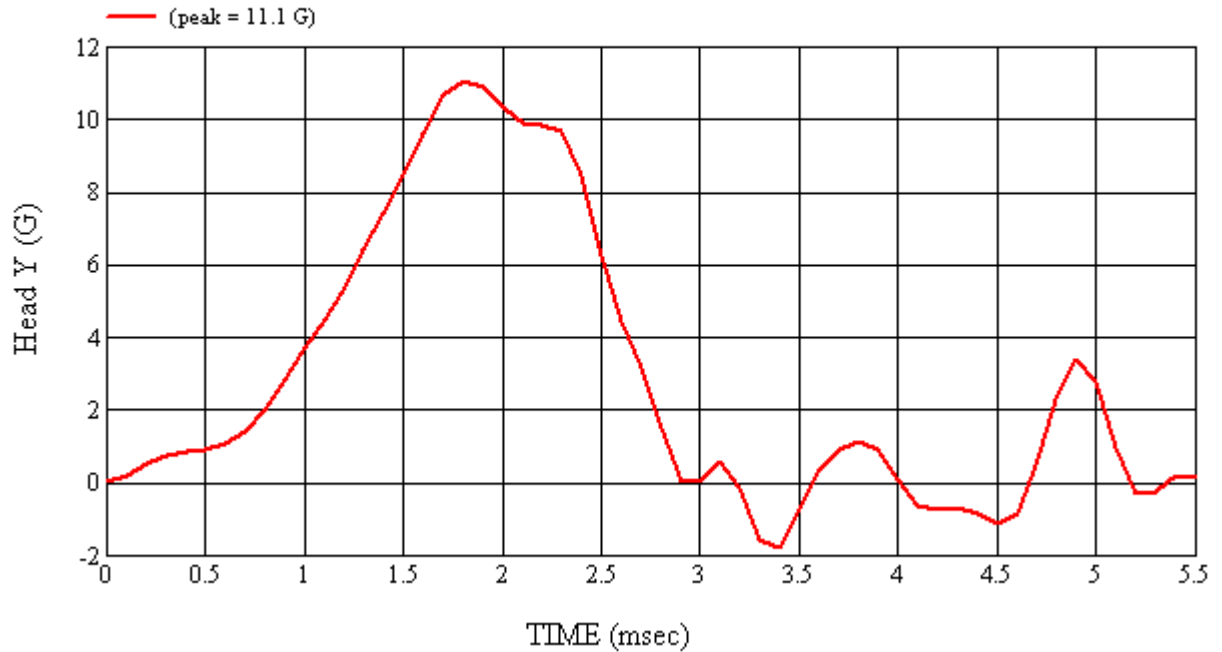

Head 038 (Pre) Calibration #H38011

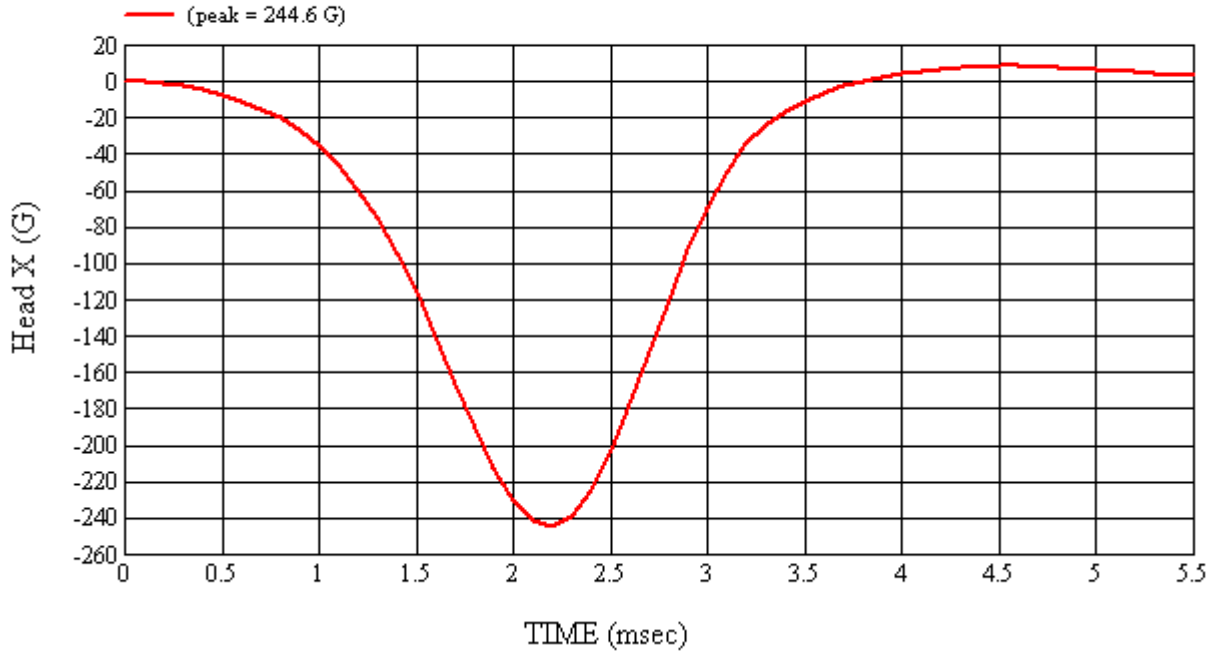

Head 038 (Pre) Calibration #H38011

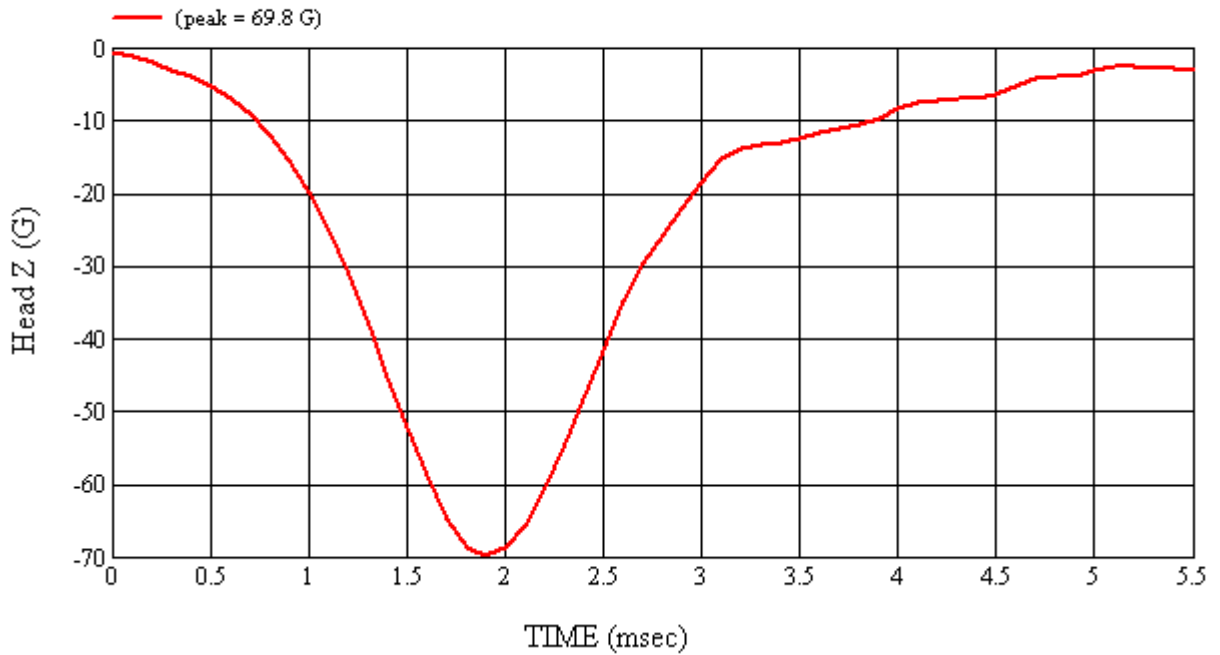

Head 038 (Pre) Calibration #H38011

4-6 Post-Test Calibration

**HEAD DROP TEST SUMMARY
 PART 572L**

HEADFORM SERIAL NUMBER: 038		CALIBRATION DATE: 5/12/2009
		CALIBRATION TIME: 9:22:01 AM
TEST PARAMETER	SPECIFICATION	TEST RESULTS
Weight	9.90 to 10.10 lbs.	9.90
Temperature	19° C to 26° C	20.6
Relative Humidity	10% to 70%	40.1
Peak Resultant Acceleration	225 G's to 275 G's	254.1
Peak Lateral Acceleration	15 G's Maximum	12.2
Unimodal Acceleration Curve	YES	YES


FMH INSTRUMENTATION					
HEAD ACCELEROMETERS					
Channel Number	Manufacturer	Model Number	Serial Number	Date of Last Calibration	Date of Next Calibration
1	ENDEVCO	7264-2000	J22700	04/17/09	10/17/09
2	ENDEVCO	7264-2000	J36197	04/17/09	10/17/09
3	ENDEVCO	7264-2000	J36353	04/17/09	10/17/09

REMARKS:


RECORDED BY: 

DATE: 5/12/2009


APPROVED BY: 

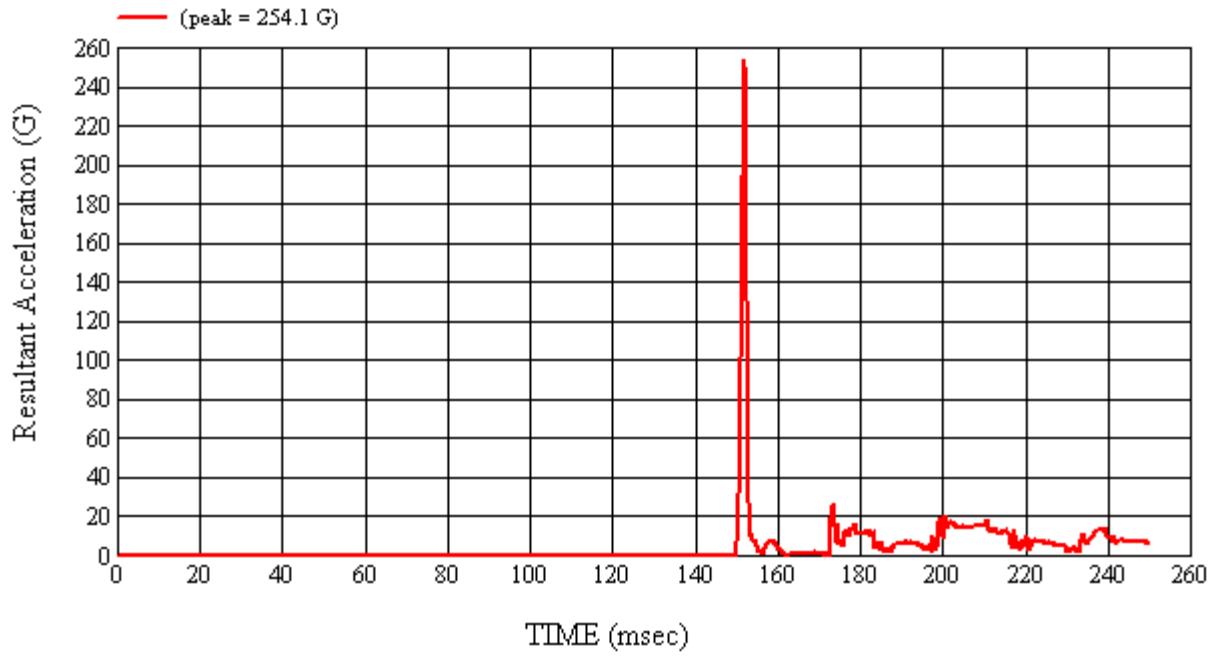


Head 038 (Post) Calibration #H38012

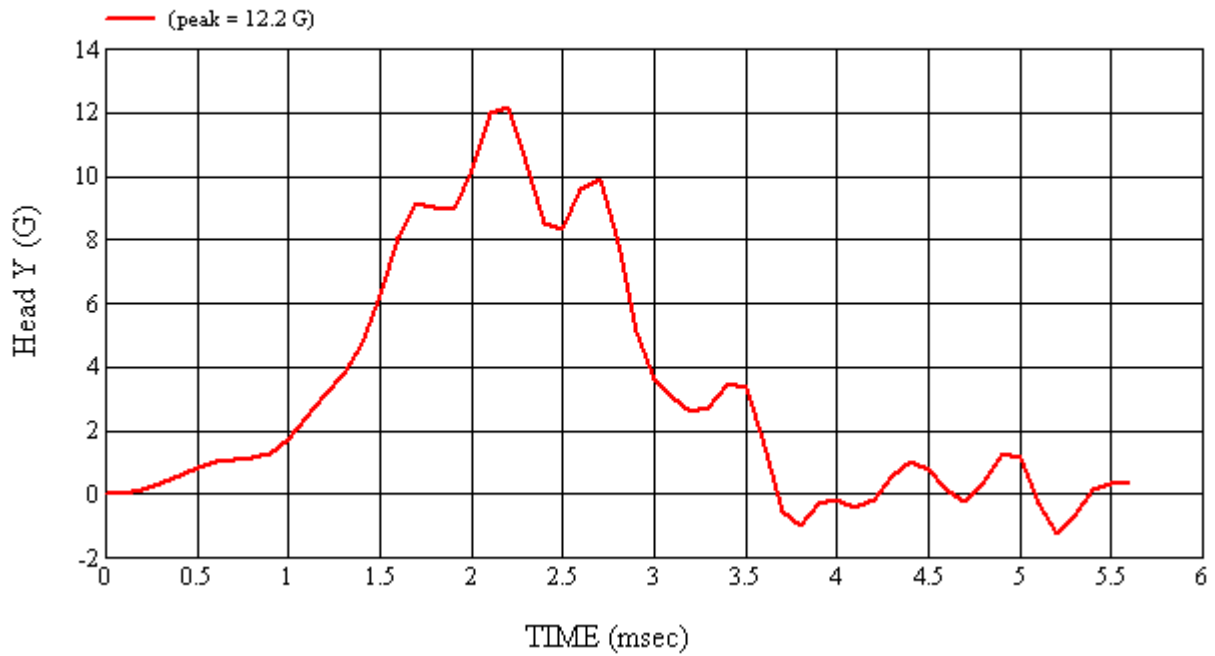

Head 038 (Post) Calibration #H38012

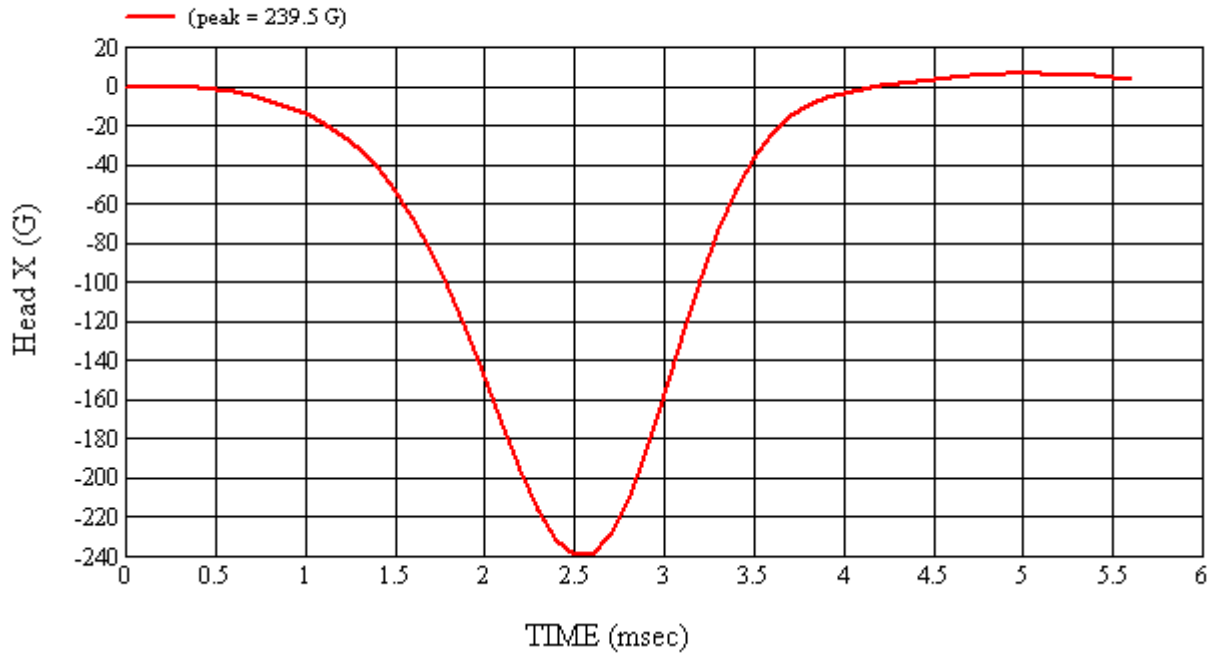

Head 038 (Post) Calibration #H38012

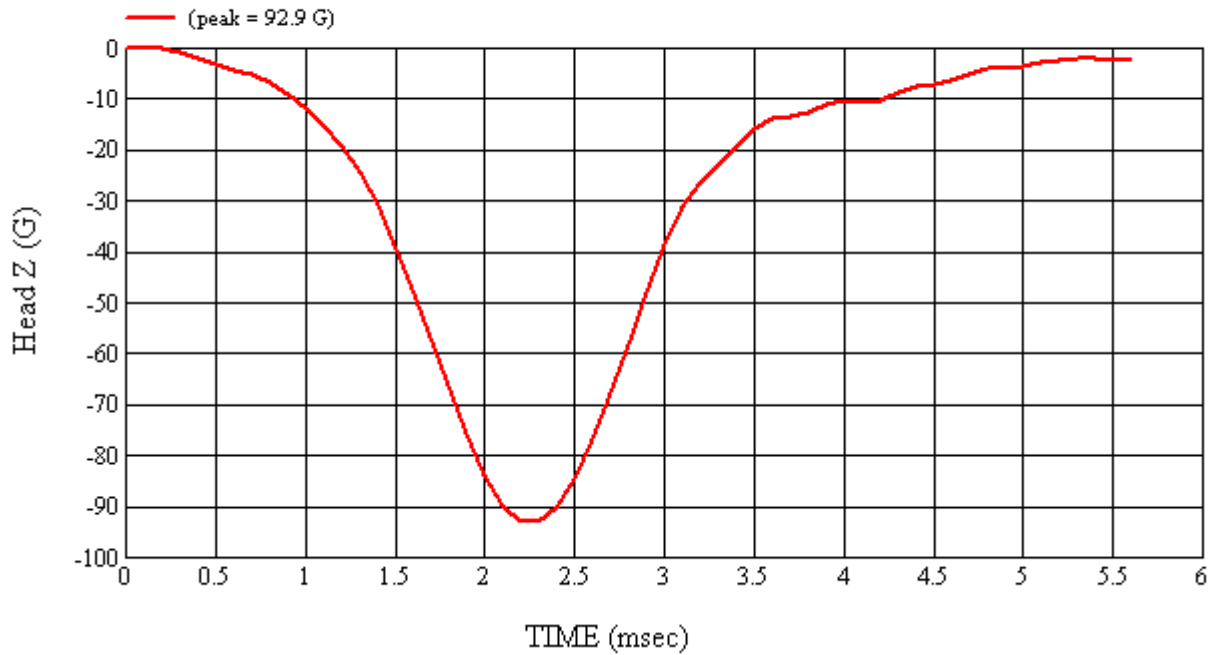

Head 038 (Post) Calibration #H38012

5.0 PHOTOGRAPHS



As Delivered – Left Side View




As Delivered – Right Side View




As Delivered – ¾ Front View From Left Side



As Delivered – ¾ Rear View From Right Side

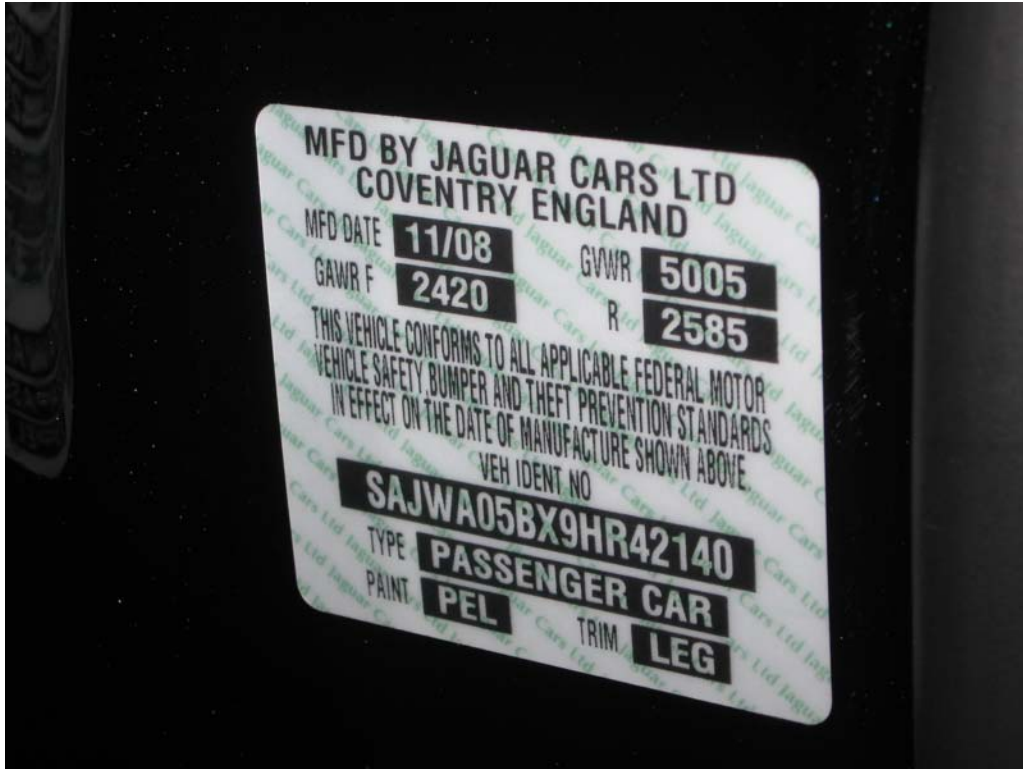

As Delivered – Vehicle's Certification Label

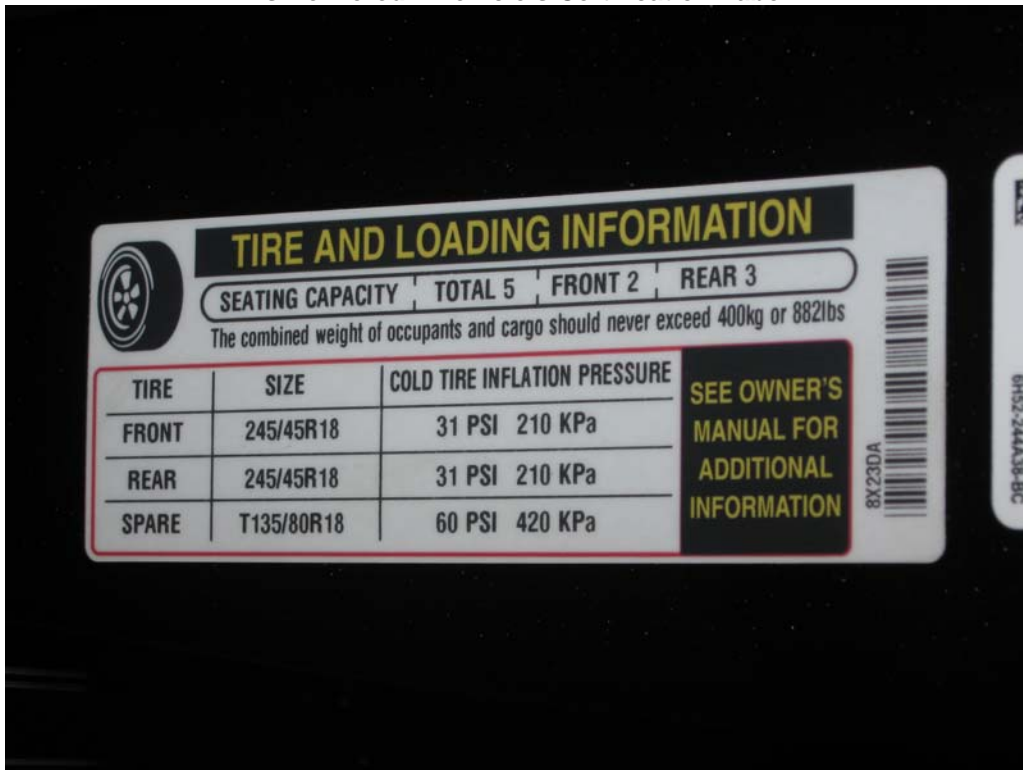

As Delivered – Vehicle's Tire Information Label


Pre-Test Component Photographs








Post-Test Component Photographs

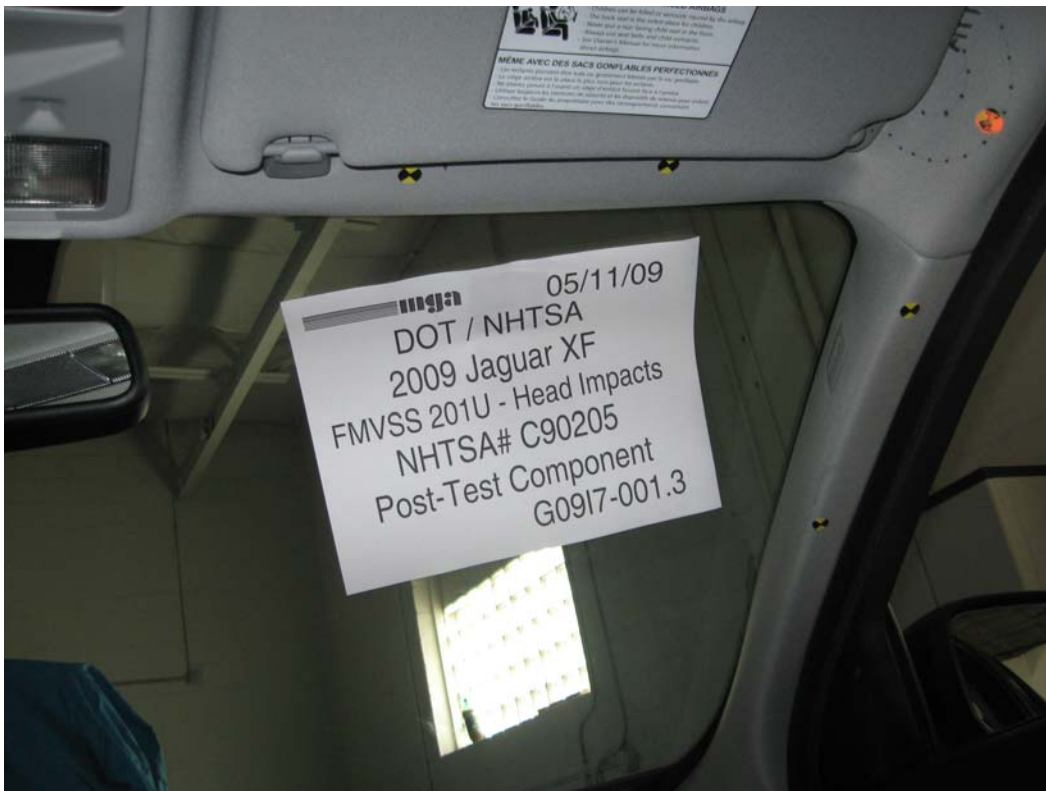





Appendix A – Temperature Trace

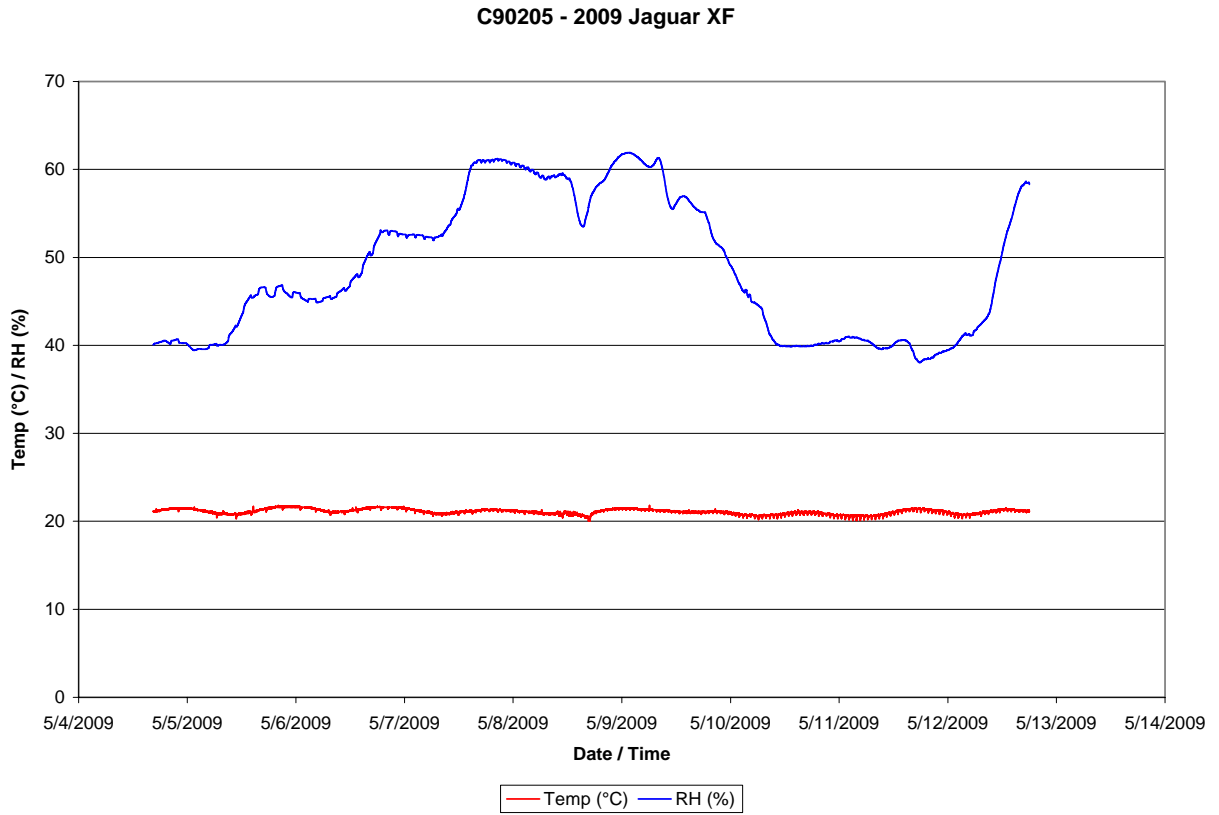

Appendix B – Calibration Certificates

Calibration Certificate

Part Description: Silver Certification Date: 08/26/08 Serial#: S08-05-08-01273
 Single Point (Max-Min/2) Specification: S08-05.076mm (.0030") Certificate#: S012739886
 Volumetric (Max Deviation) Specification: S08-05 +/- .108mm (+/- .0042") Temperature: See attached data

Measurement Standards Traceability

Ball Bar Kit Asset Number: 543 Calibration Date: 07/08/08 *SI Traceability: METAS-L20080708A81
 Thermometer Asset Number: TQ023 Calibration Date: 02/19/08 *SI Traceability: NVLAP-A7C20031

*The reflect shown has been calibrated with a device traceable to the International System of Units (SI) through a National Metrological Institute (NMI) or through a National Metrological Institute (NMI) expanded measurement uncertainty is 2.9 + 6.8X micrometers, where X represents value in meters. Uncertainty is expressed at approximately a 95% Level of Confidence using PC-E4.

Certification Results

- 3 Single Point Articulation Tests at $\pm 20\%$, $20\% - 80\%$ and $> 80\%$ range. **PASSED**
- 1 Effective diameter sphere test. **PASSED**
- 20 Volumetric Ball Bar tests in 4 quadrants and 2 orientations. **PASSED**

Calibration and certification conforms to procedures developed in accordance with ASME B89.4.22-2004.

Instrument condition as received:
 Inoperative

Instrument condition outgoing:
 Within specifications


Technician: Arnold Torres Date: 8/26/08

This certificate shall not be reproduced, except in full, without permission of FARO Technologies, Inc.
 The results of this certificate relate only to the items calibrated or tested.

FARO Technologies, Inc.
 PH1:1-800-736-2771
 PH2:407-333-9911
 FAX:407-333-8036
 LAA-B Cert Number: L1147

125 Technology Park
 Lake Mary, FL 32746
 USA

9/2/08



Page 1 of 6



MICHIGAN OPERATIONS
 DATE: 2/7/04
 SUPERCEDES: MGATPTMC.5

DOC. NO.: MGATPTMC
 REVISION NO.: 6
 PAGE 3 OF 3

Tape Measure Calibration Certificate

Reference Steel Rule

Brand: SWANSON
 S/N: MLA 00798
 Calibration Date: 1/15/09

Subject Tape Measure

Brand: TPM 906 Stanley
 S/N: TPM 906
 Calibration Date: 1/23/09

Reference (in)(mm)	Subject Tape Measure	Difference	Reference (in)(mm)	Subject Tape Measure	Difference
0 (0)	0	0	18 (450)	18	0
1 (25)	1	0	19 (475)	19	0
2 (50)	2	0	20 (500)	20	0
3 (75)	3	0	21 (525)	21	0
4 (100)	4	0	22 (550)	22	0
5 (125)	5	0	23 (575)	23	0
6 (150)	6	0	24 (600)	24	0
7 (175)	7	0	25 (625)	25	0
8 (200)	8	0	26 (650)	26	0
9 (225)	9	0	27 (675)	27	0
10 (250)	10	0	28 (700)	28	0
11 (275)	11	0	29 (725)	29	0
12 (300)	12	0	30 (750)	30	0
13 (325)	13	0	31 (775)	31	0
14 (350)	14	0	32 (800)	32	0
15 (375)	15	0	33 (825)	33	0
16 (400)	16	0	34 (850)	34	0
17 (425)	17	0	35 (875)	35	0

If all differences are $\pm 1/32$ of an inch (1 mm), then the tape measure is acceptable.

Pass Fail Maximum Difference = 0

Date: 1/23/2009 Performed By: [Signature]

All calibrations are traceable to the National Institute of Standards and Technology. Estimated uncertainty of the measurement is $\pm 0.2\%$. All certification data and equipment are on file for inspection at your request. Best uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor $k=2$.



4700 Barden Court SE, Kentwood MI 49512, Telephone: 616-698-3124, Fax: 616-698-2364, www.metrocal.com

Certificate of Calibration

MGA Research
 446 Executive Drive
 Troy, MI 48083

Order Number: **59696**
 Certificate Number: **080604806**
 Page: 1 of 1

Gauge Number: **MGA00730**
 Gauge Desc: **Digital Protractor**
 Manufacturer: **Mitutoyo**
 Model Number: **N/A**
 Serial Number: **N/A**

Customer PO: **A070681**
 Last Calibration: **N/A**
 Calibration Date: **6/4/08**
 Next Calibration: **6/4/09**

As Found Condition: **In Tolerance**

As Left Condition: **In Tolerance**

MetroCal, Inc maintains reference standards of measurement which are traceable to the National Institute of Standards and Technology, or other authorized National Standards. Calibration was performed in accordance with MetroCal Procedure CP045 and complies with the ANSI/NCSL Z540-1 and ISO/IEC 17025 Standards. Results shall not be reproduced, except in full, without the written approval of MetroCal, Inc. Results relate only to the item(s) calibrated. Any number of factors may cause the calibration item to drift out of calibration before the recommended interval has expired. Statements of compliance made using simple acceptance rule.

<u>Standard Used</u>	<u>Cal Date</u>	<u>Due Date</u>	<u>Traceable No.</u>	<u>Calibration Procedure</u> <u>Uncertainty Expressed at</u> <u>95% confidence (K=2)</u>
Gage Bk Set ID# 105	6/12/07	6/12/08	821/273187-06	0.0015°
DoAll Sine Bar ID#1879	12/31/07	12/31/08	Cert# 071231399	0.0015°

Results:


<u>Units</u>	<u>As Found Readings</u>		
	<u>Nominal</u>	<u>Actual</u>	<u>Deviation</u>
Decimal Deg.	5.00	5.0	0.00
	10.00	10.1	0.10
	20.00	20.0	0.00
<u>Tolerance</u>	30.00	30.0	0.00
± 0.1°	40.00	40.0	0.00

Reference Level Check: Within ± 0.1 degrees

<u>As Left Readings</u>		
<u>Nominal</u>	<u>Actual</u>	<u>Deviation</u>
5.00	5.0	0.00
10.00	10.1	0.10
20.00	20.0	0.00
30.00	30.0	0.00
40.00	40.0	0.00

Reference Level Check: Within ± 0.1 degrees

Comments: Environmental conditions during calibration: 68 °F, 41% RH.


 Shannon Shoemaker/bjk
 Calibration Technician

Issued: 6/5/08

Checked box indicate this calibration was performed at the customers facility.

JA 6/6/08



Certificate of Calibration

Schober Calibration Service, Inc.

2550 Oakley Park Road, Suite #300
Walled Lake, MI 48390

Phone: (248) 926-6000 FAX: (248) 926-6006



CALIBRATION 1563.01

Certificate Number: 0001591:1212069510

CUSTOMER: MGA Research Corporation
446 Executive Drive
Troy MI 48083

Calibration Location: In House

Contact: Thomas Hutter

Equipment Calibrated

Manufacturer: Dickson **Date Received:** 05/08/2008
Description: Temp/Humidity Recorder **Date Calibrated:** 05/29/2008
Model Number: FH125 **Calibration Due Date:** 05/29/2009
Serial Number: 06163263 **Calibration Procedure:** CP0001
Asset Number: MGA00152 **Revision:**
Received Status: Good **Performed By:** C. Atkinson

Condition as Received: In Tolerance

Condition as Returned: In Tolerance

Notes:


Ambient Calibration Conditions

Ambient Temperature: 21 °C **Relative Humidity:** 40 % RH **Barometric Pressure:** 988 mbar

Calibration Equipment Used

Asset Number:	Manufacturer:	Model:	Serial:	Cal Due:
RMS042	Fluke/Hart	1502A	A6C537	15 Feb 2009
RMS043	Hart Scientific	5614	778109	15 Feb 2009
RMS045	Vaisala	HMP76	C0630009	04 Jun 2008

The Uncertainty is estimated using expanded uncertainties and coverage factor (k) of 2, providing a confidence level of approximately 95%.
This calibration is traceable to the international system of units (SI) through standards calibrated by accredited laboratories, or through standards calibrated at NIST. This laboratory meets the requirements of ISO/IEC 17025-2005 and ANSI/NCSL Z540-1-1994. This certificate shall not be reproduced, except in full, without prior written approval by Schober Calibration Service.
Calibration interval determined by the customer. When determining the calibration interval, the customer should take into consideration that any number of factors may cause the calibration item to drift out of calibration before the calibration interval has expired.
The results herein apply only to the calibration of the item described above. No sampling plan was used for this calibration.

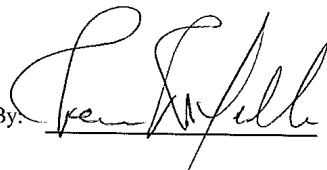Approved By:  Quality Manager

Date: 5/29/08

6/2/08

Calibration Data

MFG/MODEL: Dickson / FH125

Serial / ID #: 06163263 / MGA00152

Location: Schober Cal Lab (MGA Research)

Date Calibrated: 05/29/08

Certificate No.: 0001591:1212069510

All calculations and data transfers have been reviewed for accuracy and completeness

Range	Nominal	Lower Limit	As Found	As Left	Upper Limit
Data Logger with Sensor System Tests					
Channel 1					
	20.9° C	19.1° C	20.5° C		22.7° C
	-0.4° C	-2.2° C	-0.6° C		1.4° C
Channel 2 (RH @ 21° C)					
	41.0 %rh	39.0 %rh	40.5 %rh		43.0 %rh
	98.8 %rh	96.8 %rh	98.8 %rh		100.8 %rh
Calibration Performed By: C. Atkinson					
Temperature Measurement Uncertainty Utemp = 0.46°C Uhumidity = 1.6 %RH					

Unless otherwise noted
 As Found = As Left

Calibration Data Report
 (Non-Automated)
 IF0097



4700 Barden Court SE, Kentwood MI 49512, Telephone: 616-698-3124, Fax: 616-698-2364, www.metrocal.com

Certificate of Calibration

MGA Research
 446 Executive Drive
 Troy, MI 48083

Order Number: **60394**
 Certificate Number: **080711801**
 Page: **1 of 1**

Gauge Number: **MGA00081**
 Gauge Desc: **0 to 20lb x 0.01lb Digital Scale**
 Manufacturer: **Detecto**
 Model Number: **AP-20**
 Serial Number: **E33603-0213**

Customer PO: **A070765**
 Last Calibration: **7/9/07**
 Calibration Date: **7/11/08**
 Next Calibration: **7/11/09**

As Found Condition: **In Tolerance**

As Left Condition: **In Tolerance**

MetroCal Inc. maintains reference standards of measurement which traceable to the National Institute of Standards and Technology, or other authorized National Standards. Calibration was performed in accordance with MetroCal's Procedure No. CP-042 and the relevant sections of the manufacturers manual. This Calibration complies with the ISO/IEC 17025 and ANSI/NCSL Z540-1 Standards. Results shall not be reproduced except in full without the written approval of MetroCal Inc. Results relate only to the item(s) calibrated. Any number of factors may cause the calibration item to drift out of calibration before the recommended interval has expired. Statements of compliance made using simple acceptance rule.

Calibration Procedure
 Uncertainty Expressed at
95% confidence, (K=2)
 +/-0.001% of Load

<u>Standard Used</u>	<u>Cal. Date</u>	<u>Due Date</u>	<u>Traceable No.</u>
Weight Set ID# 2463	8/10/06	8/10/08	MI-04-06-8325

Results:
 Tolerance used: ± 0.02

Units: lbs TI Division/Increment: 0.01

Weight Test	Nominal	As Found			As Left		
		Indication	Deviation		Nominal	Indication	Deviation
0-25% fs	5	5.00	0.00		5	5.00	0.00
26-50% fs	10	9.99	-0.01		10	9.99	-0.01
51-75% fs	15	14.99	-0.01		15	14.99	-0.01
76-100% fs	20	19.99	-0.01		20	19.99	-0.01
Shift Test:		Pass			Shift Test:		Pass
Half Load Test:		Pass			Half Load Test:		Pass

Comments: Environmental conditions during calibration: 68 °F, 46 % RH.

Shannon Shoemaker/bjk
 Calibration Technician

Issued: 7/15/08

Checked box indicate this calibration was performed at the customers facility.

JA 7/17/08

Sterling Scale Co., Inc.
 20950 Boening St.
 Southfield, MI 48075

Certificate of Calibration

F41012-3
 Rev. Date 11/23/05



calibration cert. 1448.01

Customer: MGA Research Cert# 08-4587 Temp/Humidity: 70-20
 Location of Calibration: 2839 Elliott Ave. Troy MI 48063
 Calibration Date: 6/15/2008 Cal Dura: 7-09 Condition of Item: Good
 Equipment Make: Intertec Model: SWD Deluxe SerialID: 28032389
 Capacity: single pad capacity 2200 x 1lb

Applied Test Wt	Before Adjustment	Tolerance	In-Tolerance Y/N	After Adjustment	In-Tolerance Y/N	Unc .5lb
1000b	1000b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb
1000b	1011b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb
1000b	1000b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb
1000b	1000b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb
1000b	1000b	1lb	y	n/a	n/a	.5lb
10000b	10000b	2lb	y	n/a	n/a	.5lb

shift test

Platform #1 Platform #2 Platform #3
 Pass Pass Pass
 Fail Fail Fail

Tests performed: Repeatability Linear Sensitivity Discrimination

Technician: System passes all tests.

Test wts used: Our test weights s/n on file.

Scale Certified Scale Rejected

Sterling Scale Service Rep: ED Date: 6/12/2008 1 of 1
 The above item has been calibrated using the relevant EPO or OEM procedures utilizing test weights traceable to International Systems of Units (SI), through the Michigan Department of Agriculture. Test numbers on file. Expanded uncertainty (k=2) confidence level of 95% as reported. Results relate only to items listed. The reported uncertainty is valid only for the environment in which it is determined. Any number of factors may cause the item to drift out of calibration before recommended interval has expired. This report shall not be reproduced, except in full without approval of the laboratory. Tolerances followed are maintenance/acceptance per HB 44 or as determined by the customer.

QA 6/19/08

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J35919
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) ¹ 95.6
100K SHUNT

Linearity: ² 0.99981


New vs Old Sensitivit
(% Difference) -0.4


Temperature: 69.9 ° F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026030

Calibrated By: Thomas Miller

Signature: 

Approved by: 

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J22664
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) ¹ 94.3
100K SHUNT

Linearity: ² 0.99958


New vs Old Sensitivit
(% Difference) -0.5


Temperature: 69.9 °F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026381

Calibrated By: Thomas Miller

Signature: 

Approved by: 

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J35924
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) ¹ 92.8
100K SHUNT

Linearity:² 0.99935


New vs Old Sensitivit
(% Difference) -0.4

Temperature: 69.9 °F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026815

Calibrated By: Thomas Miller

Signature:  _____

Approved by:  _____

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	AHTB2
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) ¹ 115.9
100K SHUNT

Linearity: ² 0.99947


New vs Old Sensitivit
(% Difference) -0.7


Temperature: 69.9 ° F

Humidity: 38 %

Sensitivity (mV/V/G): 0.021450

Calibrated By: Thomas Miller

Signature:  _____

Approved by:  _____

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as $1 - (\text{Standard Deviation} / \text{Mean})$.

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J14103
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) ¹ 93.7
100K SHUNT

Linearity:² 0.99893


New vs Old Sensitivit
(% Difference) -0.9

Temperature: 69.9 ° F

Humidity: 38 %

Sensitivity (mV/V/G): 0.026528

Calibrated By: Thomas Miller

Signature:  _____

Approved by:  _____

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as $1 - (\text{Standard Deviation} / \text{Mean})$.

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #	Q353B01	Manufacturer	Endevco
Serial #:	84592	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J35800
Calibration Date:	9/18/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	DTI		

Calibration Date: 3/2/2009

New DLR(Units:G'S) ¹ 97.1
100K SHUNT

Linearity:² 0.99893

New vs Old Sensitivit
(% Difference) -0.5


Temperature: 69.9 °F

Humidity: 38 %

Sensitivity (mV/V/G): 0.025575

Calibrated By: Thomas Miller

Signature:  _____

Approved by:  _____

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as $1 - (\text{Standard Deviation} / \text{Mean})$.

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0 % at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #:	352C03	Manufacturer:	Endevco
Serial #:	95980	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J22700
Calibration Date:	7/24/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	PCB		

Calibration Date: 4/17/2009

New DLR(Units:G'S) ¹ 94.0
100K SHUNT

Linearity:² 0.99977

New vs Old Sensitivity
(% Difference) 2.0

Temperature: 70 °F

Humidity: 25 %

Sensitivity (mV/V/G): 0.02647

Calibrated By: Chris Collins

Signature: Chris Collins

Approved by: Donald Kalato

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as 1- (Standard Deviation/ Mean) .

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0% at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #:	352C03	Manufacturer:	Endevco
Serial #:	95980	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J36197
Calibration Date:	7/24/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	PCB		

Calibration Date: 4/17/2009

New DLR(Units:G'S) ¹ 106.3
100K SHUNT

Linearity:² 0.99945

New vs Old Sensitivity
(% Difference) 2.1

Temperature: 70 °F

Humidity: 25 %

Sensitivity (mV/V/G): 0.023407

Calibrated By: Chris Collins

Signature: Chris Collins

Approved by: Steven D. Kalato

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as $1 - (\text{Standard Deviation} / \text{Mean})$

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0% at the 95% confidence level.

MGA Research Corporation-Calibration Certificate

ACCELEROMETER

Reference		Sensor	
Name:	Accel Standard	Name:	MGA MI
Model #:	352C03	Manufacturer:	Endevco
Serial #:	95980	Model #:	7264-2000
Capacity:	G's:250	Serial #:	J36353
Calibration Date:	7/24/2008	Capacity/Range:	2,000 (G's)
Calibrated By:	PCB		

Calibration Date: 4/17/2009

New DLR(Units:G'S) ¹ 97.5
100K SHUNT

Linearity: ² 0.99962

New vs Old Sensitivity
(% Difference) 1.4

Temperature: 70 °F

Humidity: 25 %

Sensitivity (mV/V/G): 0.025512

Calibrated By: Chris Collins

Signature: Chris Collins

Approved by: Heena R. Kalate

1. Actual data of reference and sensor instruments is found in calibration files

2. Linearity is defined as 1- (Standard Deviation/ Mean) .

All calibrations are traceable to the National Institute of Standards and Technology

Calibration uncertainty no greater than 4.0% at the 95% confidence level.



Certificate #: 125456001

T



Customer: 090100
 MGA Research Corporation
Shipper #: 484B06
Address: 5000 Warren Road
 Burlington, WI 53105
Contact: J. Leonard
PO #: 03-08-0341

Manufacturer: PCB
Model: 484B06
Description: Power Unit
Serial Number: 00001458
Asset Number:
Barcode:

As Received In Tolerance Out of Tolerance
 Inspected Rejected
 Operational Damaged
 N/A

As Returned In Tolerance Out of Tolerance
 Inspected Rejected
 Operational Damaged
 N/A

Action Taken Full Calibration Spot Calibration
 Open Modification Adjusted
 Replaced Returned As Is

Cal Date: 09/18/2008
Due Date: 09/18/2009
Temperature: 73.00 deg. F
Humidity: 36.00 %
Baro. Pres.: DCK (5156)
Precedent: manufacturer's manual

Incoming Remarks: Replacement for unit on WOH 182720056. In case with connector cable/power cord and accelerometer in case.

Technical Remarks: Uncertainty data to follow.

Cert. #	Manufacturer	Model #	Description	Cal Date	Die Date
108256017	TMS	9155C	Accelerometer Calibration W	02/18/2008	02/18/2009
108256027	PCB	442A102	Signal Conditioner	01/10/2008	01/10/2009

System Instrumentation Includes

ID	Manufacturer	Model	Description	Serial Number
84592	PCB	Q33B01	Accelerometer	84592

Calibration Standards Utilized

Model #	Description	Cal Date	Die Date
9155C	Accelerometer Calibration W	02/18/2008	02/18/2009
442A102	Signal Conditioner	01/10/2008	01/10/2009

The above identified unit was calibrated in our laboratory at the address shown below.
 This report applies only to the item(s) identified above and shall not be reproduced, except in full, without the written approval of Dynamic Technology, Inc. This unit has been calibrated utilizing standards with a "T" Laboratory label (FDA of power line 41 at 95% confidence level with coverage factor of 2) units observed stated above. This calibration was performed using metrotraceable to the SI through NIST or other ANSLNCA, Z-264, NIST 1034, ISO 17025, Q40409.
 * The number of hours any sensor was calibrated from to date are of calibration before the item has expired.
 Technician Name/Date: Joseph Leonard, 09/18/2008 Signature: *Joseph Leonard* OA Approved: *Joseph Leonard*

1200 N. Old US 21, PO Box 559, Hartland, MI 48335-0559 (810) 225-4601 FAX (810) 225-4602
 Page 1 of 2

~Report of Calibration~

Sensor Information
 Model Number: 484B06/Q33B01
 Serial Number: 145884582
 Manufacturer: PCB
 ID Number: 145884582
 Description: ICP® Accelerometer

Calibration Data
 Sensitivity @ Ref. Freq.: 20.28 mV/g
 Phase @ Ref. Freq.: -0.06 deg.
 Test Level: 1.00 g

Transducer Specifications
 Range: 250.00 mV/g
 Resolution: 0.0000 deg.
 Temp Range: -54 to 121 °C
 -65 to 250 °F
 Ads: Uniaxial

Notes
 This certificate may not be reproduced except in full, without written permission.
 Back-to-Back Comparison Calibration
 This calibration was performed with TMS 9155C Calibration Worktable, version 3.0.0
 Calibration is NIST Traceable through product number 822271196.

User Notes
 125456001 T

Unit Condition
 As Found: In Tolerance
 As Left: In Tolerance

Lab Conditions
 Temperature: 73.00 °C
 Humidity: 36.00 %

Approval Information
 Technician: J Leonard

Data Table

Frequency (Hz)	Sin(mV/g)	Phase (deg)
6.00	20.140	0.63
10.00	20.109	0.47
30.00	20.212	0.18
50.00	20.225	-0.07
100.00	20.281	-0.09
150.00	20.287	-0.04
200.00	20.325	0.03
500.00	20.309	-0.70
1000.00	20.409	-0.10
2000.00	20.489	0.12
4000.00	20.489	-0.05
6000.00	20.625	-0.20
8000.00	21.059	0.14
10000.00	21.295	-0.25
20000.00	21.512	-1.27
30000.00	21.912	-0.97

2 of 2

1200 N. Old US 21, PO Box 559, Hartland, MI 48335-0559
 (810) 225-4601 FAX (810) 225-4602
 www.dynatech.com

~ Calibration Certificate ~


Per ISO 16063-21

Model Number: 352C03
 Serial Number: 95980
 Description: ICP® Accelerometer Method: Back-to-Back Comparison (AT401-3)
 Manufacturer: PCB

Calibration Data

Sensitivity @ 100.0 Hz	10.11 mV/g	Output Bias	11.4 VDC
	(1.031 mV/m/s ²)	Transverse Sensitivity	0.6 %
Discharge Time Constant	1.7 seconds	Resonant Frequency	57.2 kHz

Sensitivity Plot

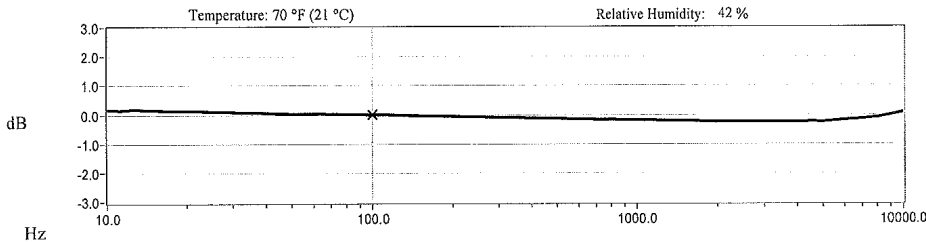

Data Points

Frequency (Hz)	Dev. (%)	Frequency (Hz)	Dev. (%)	Frequency (Hz)	Dev. (%)
10.0	1.9	300.0	-1.1	7000.0	-1.7
15.0	1.7	500.0	-1.6	10000.0	0.9
30.0	1.0	1000.0	-2.3		
50.0	0.3	3000.0	-3.0		
REF. FREQ.	0.0	5000.0	-2.9		

Mounting Surface: Stainless Steel w/Silicone Grease Coating Fastener: Stud Mount Fixture Orientation: Vertical
 Acceleration Level (rms): 10.0 g (98.1 m/s²)
*The acceleration level may be limited by shaker displacement at low frequencies. If the listed level cannot be obtained, the calibration system uses the following formula to set the vibration amplitude: Acceleration Level (g) = 0.010 x (freq)^{1.5}.
 †The gravitational constant used for calculations by the calibration system is: 1 g = 9.80665 m/s².

Condition of Unit

As Found: n/a
 As Left: New Unit, In Tolerance

Notes

1. Calibration is NIST Traceable thru Project 822/274086 and PTB Traceable thru Project 1060.
2. This certificate shall not be reproduced, except in full, without written approval from PCB Piezotronics, Inc.
3. Calibration is performed in compliance with ISO 9001, ISO 10012-1, ANSI/NCCL Z540-1-1994 and ISO 17025.
4. See Manufacturer's Specification Sheet for a detailed listing of performance specifications.
5. Measurement uncertainty (95% confidence level with coverage factor of 2) for frequency ranges tested during calibration are as follows: 5-9 Hz; +/- 2.0%, 10-99 Hz; +/- 1.5%, 100-1999 Hz; +/- 1.0%, 2-10 kHz; +/- 2.5%.

Technician: Susan Lyon Date: 07/31/08



PCB PIEZOTRONICS™
 VIBRATION DIVISION
 Headquarters: 3425 Walden Avenue, Depew, NY 14043
 Calibration Performed at: 10869 Highway 903, Halifax, NC 27839
 TEL: 888-684-0013 FAX: 716-685-3886 www.pcb.com

TWH
 9/11/08

cal# - 3360349075.73

