

REPORT NUMBER 114-GTL-10-008

**SAFETY COMPLIANCE TESTING FOR  
FMVSS NO. 114  
THEFT PROTECTION**

**NISSAN MOTOR CO., LTD.  
2010 INFINITI G37, PASSENGER CAR  
NHTSA NO. CA5204**

**GENERAL TESTING LABORATORIES, INC.  
1623 LEEDSTOWN ROAD  
COLONIAL BEACH, VIRGINIA 22443**



June 21, 2010

**FINAL REPORT**

**PREPARED FOR**

**U. S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
ENFORCEMENT  
OFFICE OF VEHICLE SAFETY COMPLIANCE  
1200 NEW JERSEY AVE., SE  
WASHINGTON, D.C. 20590**


This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared By: \_\_\_\_\_

Approved By: \_\_\_\_\_

Approval Date: 06/21/10

FINAL REPORT ACCEPTANCE BY OVSC:

Accepted By: 

Acceptance Date: 6/22/10

1. Report No. 114-GTL-10-008	2. Government Accession No. N/A	3. Recipient's Catalog No. N/A
4. Title and Subtitle Final Report of FMVSS 114 Compliance Testing of a 2010 INFINITI G37 PASSENGER CAR NHTSA No. CA5204		5. Report Date June 21, 2010
		6. Performing Organ. Code GTL
7. Author(s) Grant Farrand, Project Engineer Debbie Messick, Project Manager		8. Performing Organ. Rep# GTL-DOT-10-114-008
9. Performing Organization Name and Address General Testing Laboratories, Inc. 1623 Leedstown Road Colonial Beach, Va 22443		10. Work Unit No. (TRAIS) N/A
		11. Contract or Grant No. DTNH22-06-C-00032
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Admin. Enforcement Office of Vehicle Safety Compliance (NVS-220) 1200 New Jersey Ave., S.E., Washington, DC 20590		13. Type of Report and Period Covered Test Date March 26, 2010
		14. Sponsoring Agency Code NVS-221
15. Supplementary Notes		
16. Abstract Compliance tests were conducted on the subject 2010 Infiniti G37 4-door Passenger Car in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-114-03-DRAFT-GTL-REVC for the determination of FMVSS 114 compliance.  Test failures identified were as follows: None		
17. Key Words Compliance Testing Safety Engineering FMVSS 114		18. Distribution Statement Copies of this report are available from NHTSA Technical Information Services (TIS) Room W45-212 (NPO-411) 1200 New Jersey Ave., S.E. Washington, DC 20590 Telephone No. (202) 366-4947
19. Security Classif. (of this report) UNCLASSIFIED	21. No. of Pages 30	22. Price
20. Security Classif. (of this page) UNCLASSIFIED		

## TABLE OF CONTENTS

SECTION	PAGE
1. Purpose of Compliance Test	1
2. Test Procedure and Summary of Results	2
3. Test Data	3
4. Test Equipment List	14
5. Photographs	15
5.1 ¾ Frontal View from Left Side of Vehicle	
5.2 Vehicle Certification Label	
5.3 Vehicle Tire Information Label	
5.4 Close-up View of Electronic Ignition Key	
5.5 Start/Stop Button on Dash	
5.6 Key FOB Intelliport	
5.7 Key FOB in Intelliport	
5.8 No Key Warning on Dash	
5.9 Transmission Gear Selection Control	
5.10 Cover over Gear Selector Release	
5.11 Gear Selector Release Tool	

## SECTION 1

### PURPOSE OF COMPLIANCE TEST

#### 1.0 PURPOSE OF TEST

A model year 2010 Infiniti G37 Passenger Car was subjected to Federal Motor Vehicle Safety Standard (FMVSS) No. 114 testing to determine if the vehicle was in compliance with the requirements of the standard. FMVSS 114 specifies requirements to decrease the likelihood that a vehicle is stolen, or accidentally set in motion.

1.1 The test vehicle was a 2010 Infiniti G37 Passenger Car. The vehicle was identified as follows:

A. Vehicle Identification Number: JN1CV6AR7AM454290

B. NHTSA No.: CA5204

C. Manufacturer: NISSAN MOTOR CO., LTD.

D. Manufacture Date: 12/09

E. Color: White

#### 1.2 TEST DATE

The test vehicle was subjected to FMVSS No. 114 testing on March 26, 2010.

## SECTION 2

### TEST PROCEDURE AND SUMMARY OF RESULTS

#### 2.0 TEST PROCEDURE

All tests were conducted in accordance with NHTSA, Office of Vehicle Safety Compliance (OVSC) Laboratory Procedure TP-114-03-DRAFT-GTL-REVC and General Testing Laboratories, Inc. (GTL) Test Procedure, TP-114-03-Draft, "Theft Protection and Rollaway Prevention".

#### 2.1 SUMMARY OF RESULTS

Test data indicate the FMVSS 114 requirements appear to have been satisfied. All test data resulting from the tests were recorded on test data sheets in Section 3.

## SECTION 3

## TEST DATA

3.0 TEST RESULTS

The following data sheets document the results of FMVSS 114 testing on the 2010 Infiniti G37.





FMVSS 114, THEFT PROTECTION  
DATA SHEET 1 continued

Describe how the key is removed from the starting system:

For an automatic transmission vehicle, the electronic code is removed from the vehicle's starting system only, when (1) the engine is shut off; and (2) the transmission is in the "park" position.

GEAR SELECTION CONTROL

Describe the gear selection control:

Center Console Mounted Gear Selector.

Describe how the gear selection control is activated:

Depress on Brake Pedal then move gear selector to desired position.

Describe all of the selectable settings:

Park, Reverse, Neutral, Drive with ±

IMMOBILIZER

Is the vehicle equipped with an immobilizer    YES   X              NO           

Describe the immobilizer device and how it prevents vehicle theft (if equipped):

The electronic code is inserted into the vehicle's I-Key system when ID verification to the Key is determined valid. Once the electronic code is in the starting system, the engine is Activated and deactivated by pressing the start/stop button.

OPTIONAL RELEASE DEVICES

Describe if the vehicle is equipped with optional release devices:

Yes

OPTIONAL RELEASE DEVICES:

Key Removal                       Gear Selection Control   X      None                       Other           

VEHICLE FLUIDS

Check all vehicle fluids and adjust to the proper levels for operation:           Full          

VEHICLE TIRE PLACARD INFORMATION

Vehicle Mfg. Recommended Tire Inflation Pressure

(kPa): Front   230              Rear   230

FMVSS 114, THEFT PROTECTION  
DATA SHEET 1 continued


TIRE INFLATION PRESSURES:

Measured (kPa): LF 230      LR 230      RF 230      RR 230

WEIGHT

Vehicle Curb Weight(kg): 1741    Weight of Driver (kg): 91    (target = 91kg)

FMVSS 114, THEFT PROTECTION  
DATA SHEET 2
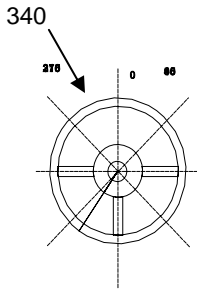
<b>REQUIREMENT S5.1.1</b>	<b>PASS</b>	<b>FAIL</b>
Engine cannot be started without using the key <u>  X  </u> Yes <u>      </u> No	X	
<p>With key removed, steering wheel locks: Yes: <u>  X  </u> No: <u>      </u></p> <p>Note: After opening driver door</p> <p>Identify locking position(s) on wheel using arrow(s)</p> <p>Clockwise: <u>      0      </u> (degrees) Counterclockwise: <u>   340   </u> (degrees)</p> <div style="text-align: right; margin-top: 20px;">  </div>		
<p>Key removal prevents forward self-mobility: Yes: <u>  X  </u> No: <u>      </u></p> <p>If yes describe: Vehicle will not start without key.</p>		
When key is removed from the starting system, starting of the engine or motor and either steering or self mobility is prevented. YES	X	

REMARKS:



FMVSS 114, ROLLAWAY PREVENTION  
DATA SHEET 3  
(for vehicles equipped with transmission with a "park" position)

VEH. NHTSA NO.: CA5204

TEST DATE: 03/26/10

REQUIREMENT S5.2.1	PASS	FAIL
<p>The starting system prevents key removal in ALL gear selection control positions except "park". Yes <u>X</u> No _____</p> <p>Can the gear selection control be placed between each gear selection position and will it remain there without assistance? Yes _____ No <u>X</u></p> <p>If yes, can the key be removed from the starting system? Yes _____ No _____</p> <p>If the key can be removed from the vehicle starting system when the gear selection control is not locked in "park", a mechanism shall exist which, upon key removal, the vehicle transmission or gear selection control shall become locked in "park" as the direct result of removing the key. If such a mechanism exists, describe the mechanism and its function:</p>	X	

REQUIREMENT S5.2.2	PASS	FAIL
<p>The gear selection control is locked in the "park" position when the key is removed from the starting system. Yes <u>X</u> No _____</p>	X	

REMARKS:

DATA SHEET 3 continued

REQUIREMENT S5.2.3	PASS	FAIL
<p><u>ELECTRICAL FAILURE (Battery Discharge)</u></p> <p>In the event of an electrical failure, key removal from the starting system when the transmission or gear selection control is not locked in “park” is permitted”.                      Yes <u>X</u> No _____</p>		
<p>The vehicle is equipped with an override device that permits key removal from the starting system when the transmission or gear selection control is not locked in “park”.</p> <p>Yes _____ No <u>X</u></p>		
<p>If yes, select the type of override device equipped:                      Opaque Cover _____ No Cover _____</p> <p>Describe the override device design and mode of activation (if equipped):</p>	N/A	
<p><b>FILL IN THE SECTION BELOW THAT APPLIES:</b></p> <p><u>VERRIDE WITH AN OPAQUE COVER:</u></p> <p>The opaque surface cover prevents sight of and use of override device.                      Yes _____ No _____</p> <p>The opaque surface cover can only be removed by using a screwdriver or other tool.                      Yes _____ No _____</p> <p>As a direct result of removing the key from starting system, the following is prevented:      Steering _____ or Self-Mobility _____</p> <p><u>VERRIDE WITH NO COVER</u></p> <p>The override device requires the use of a tool to activate.                      Yes _____ No _____</p> <p>Simultaneous activation of the override device and removal of key from starting system is required.                      Yes _____ No _____</p> <p>As a direct result of removing the key from the starting system, the following is prevented:      Steering _____ or Self-Mobility _____</p>	N/A	N/A

REMARKS:

DATA SHEET 3 continued

REQUIREMENT S5.2.4	PASS	FAIL
<p><b><u>GEAR SELECTION CONTROL OVERRIDE DEVICE</u></b></p> <p>The vehicle is equipped with an override device that allows the user to move the gear selection control from “park” after the key has been removed from the starting system. Yes <u>X</u> No _____</p> <p>If yes, select the type of override device that is equipped: Override operated with a: Key _____ Opaque Cover <u>X</u> No Cover _____</p> <p>Describe the override device design and mode of activation (if equipped): Push button release activated by a special wrench supplied in tool kit.</p> <p><b>FILL IN THE SECTION BELOW THAT APPLIES:</b></p> <p><b><u>OVERVERRIDE OPERATED WITH KEY:</u></b></p> <p>The key is required to operate the override device that allows the user to move the gear selection control from “park” after the key has been removed from the starting system. Yes _____ No _____</p> <p><b><u>OVERVERRIDE WITH AN OPAQUE COVER</u></b></p> <p>The opaque surface cover prevents sight of and use of override device. Yes <u>X</u> No _____</p> <p>The opaque surface cover can only be removed by using a screwdriver or other tool. Yes <u>X</u> No _____</p> <p>As a direct result of removing the key from the starting system, the following is prevented: Steering <u>X</u> or Self-Mobility <u>X</u></p> <p><b><u>OVERVERRIDE WITH NO COVER</u></b></p> <p>The override device requires the use of a tool to operate. Yes _____ No _____</p> <p>Simultaneous activation of the override device and removal of key from starting system is required. Yes _____ No _____</p> <p>As a direct result of removing the key from the starting system, the following is prevented: Steering _____ or Self-Mobility _____</p>	<p>N/A</p> <p>X</p> <p>N/A</p>	

REMARKS:





## DATA SHEET 3 continued

REQUIREMENTS S5.3	PASS	FAIL
<u>VEHICLE FACING UPHILL ON 10% GRADE</u>		
With the key in the "off" position, the transmission will shift out of "park" without the service brake being applied. Yes_____ No <u>X</u>	<u>X</u>	
With the key in the "acc" position, the transmission will shift out of "park" without the service brake being applied. Yes_____ No <u>X</u>	<u>X</u>	
With the key in the "on" position (engine off), the transmission will shift out of "park" without the service brake being applied. Yes_____ No <u>X</u>	<u>X</u>	
With the key in the "start" position, the transmission will shift out of "park" without the service brake being applied. Yes_____ No <u>X</u>	<u>X</u>	
With the key in the "other" position (please specify), the transmission will shift out of "park" without the service brake being applied. Yes_____ No_____	<u>N/A</u>	
Does the key stay between starting system positions without being held by operator? Yes_____ No <u>X</u> If so, please describe.	<u>X</u>	
Brake force readings (force required to allow the transmission to shift out of "park"):		
The vehicle is equipped with adjustable pedals: Yes_____ No <u>X</u>		
Fore Position:	Aft Position (if applicable)	
Reading 1 <u>3.9 N</u>	Reading 1 _____	
Reading 2 <u>3.9 N</u>	Reading 2 _____	
Reading 3 <u>3.8 N</u>	Reading 3 _____	
Reading 4 <u>3.8 N</u>	Reading 4 _____	
Reading 5 <u>3.9 N</u>	Reading 5 _____	
Avg. <u>3.86 N</u>	Avg. _____	
	<u>X</u>	

REMARKS:

RECORDED BY: G. FarrandDATE: 03/26/10APPROVED BY: D. Messick

SECTION 4  
TEST EQUIPMENT LIST

ITEM	MFR	MODEL	S/N	CAL. PERIOD	DATE OF NEXT CALIB.	REMARKS
SLR DIGITAL CAMERA	NIKON	D50	N/A	N/A	N/A	
TIRE PRESSURE GAUGE	WESKLER	45-0/100	107	12 MO.	04/03/10	
INCLINOMETER	MITUTOYO	PRO 360	950-315	N/A	BEFORE USE	
STEEL TAPE	STANLEY	FAT MAX	33-890	12 MO.	03/29/10	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/02/11	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/02/11	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/02/11	
WHEEL SCALES	INTERCOMP	SERIES 94	199744	12 MO.	03/02/11	
SPRING SCALE	CHATILLON	DPP-10	4729	12 MO.	BEFORE USE	

SECTION 5  
PHOTOGRAPHS



2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.1  
¾ FRONTAL VIEW FROM LEFT SIDE OF VEHICLE

MANUFACTURED BY NISSAN MOTOR CO.,LTD.

DATE: 12/09 GVWR/PNBV: 4846 LBS.

GAWR/PNBE FR: 2423 LBS. RR: 2482 LBS.

THIS VEHICLE CONFORMS TO ALL APPLICABLE FEDERAL MOTOR VEHICLE SAFETY, BUMPER, AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.


VIN: JN1CV6AR7AM454290 PASSENGER CAR

COLOR	TRIM	TRANS	AXLE	ENGINE
QAA	K	RE7R01A	RC33	VQ37(VHR) 3696CC



JN1CV6AR7AM454290

FIGURE 5.2  
VEHICLE CERTIFICATION LABEL

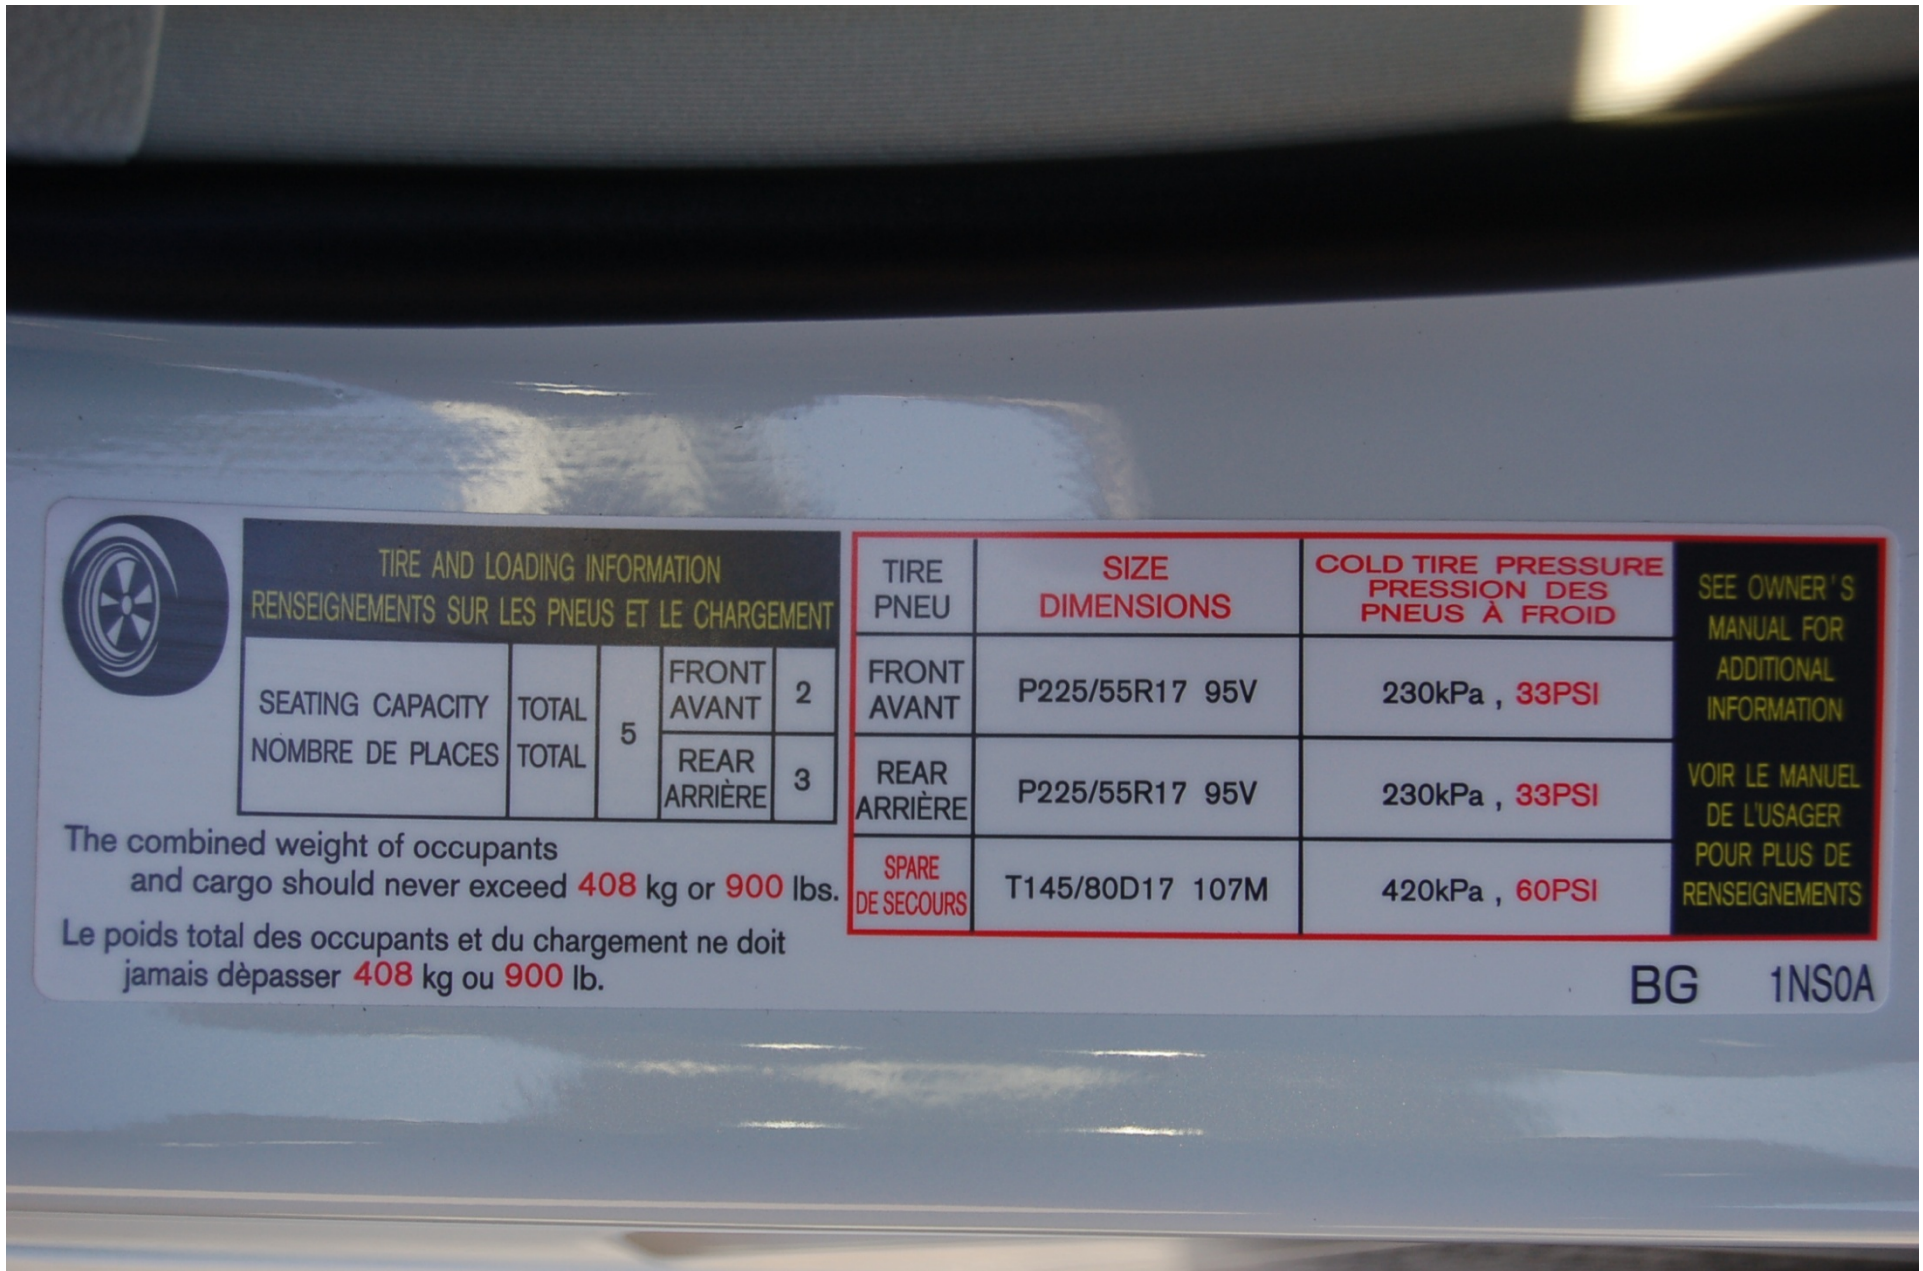

**TIRE AND LOADING INFORMATION**  
**RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT**

SEATING CAPACITY NOMBRE DE PLACES	TOTAL TOTAL	5	FRONT AVANT	2
			REAR ARRIÈRE	3

The combined weight of occupants and cargo should never exceed **408 kg** or **900 lbs.**  
 Le poids total des occupants et du chargement ne doit jamais dépasser **408 kg** ou **900 lb.**

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS A FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION  VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
FRONT AVANT	P225/55R17 95V	230kPa , <b>33PSI</b>	
REAR ARRIÈRE	P225/55R17 95V	230kPa , <b>33PSI</b>	
<b>SPARE DE SECOURS</b>	T145/80D17 107M	420kPa , <b>60PSI</b>	

**BG 1NS0A**

2010 INFINITI G37  
 NHTSA NO. CA5204  
 FMVSS NO. 114

FIGURE 5.3  
 VEHICLE TIRE INFORMATION LABEL



2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.4  
CLOSE-UP VIEW OF IGNITION KEY



2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.5  
START/STOP BUTTON ON DASH





2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.6  
KEY FOB INTELLIPORT



2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.7  
KEY FOB IN INTELLIPORT



2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.8  
NO KEY WARNING ON DASH



2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.9  
TRANSMISSION GEAR SELECTION CONTROL





2010 INFINITI G37  
NHTSA NO. CA5204  
FMVSS NO. 114

FIGURE 5.11  
GEAR SELECTOR RELEASE TOOL