

REPORT NUMBER: 301-CAL-07-05

**SAFETY COMPLIANCE TESTING FOR FMVSS 301  
FUEL SYSTEM INTEGRITY**

HONDA MOTOR COMPANY  
2007 HONDA ACCORD  
4-DOOR SEDAN

NHTSA NUMBER: C75304

CALSPAN TEST NUMBER: 8832-F301-05

CALSPAN CORPORATION  
P.O. BOX 400  
BUFFALO, NEW YORK 14225





FINAL REPORT  
October 9, 2007

PREPARED FOR:

U. S. Department of Transportation  
National Highway Traffic Safety Administration  
Enforcement  
Office of Vehicle Safety Compliance  
1200 New Jersey Ave, S. E.  
(NVS-220)  
Washington, DC 20590

This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration, in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

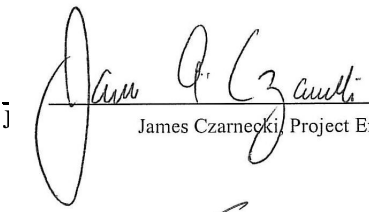Prepared By:  \_\_\_\_\_  
James Czarniecki, Project Engineer

Approved By:  \_\_\_\_\_  
Vince Paolini, Program Manager  
Transportation Sciences Center

Approval Date:  \_\_\_\_\_

FINAL REPORT ACCEPTANCE BY OVSC:

Accepted By: \_\_\_\_\_

Acceptance Date: \_\_\_\_\_

**TECHNICAL REPORT STANDARD TITLE PAGE**

1. Report No. 301-CAL-07-05		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report of FMVSS 301 Compliance Testing of a 2007 Honda Accord 4-door Sedan NHTSA No. C75304				5. Report Date October 9, 2007	
				6. Performing Organization Code CAL	
7. Author(s) James Czarnecki, Project Engineer Vince Paolini, Program Manager				8. Performing Organization Report No. 8832-F301-05	
9. Performing Organization Name and Address Advance Information Engineering Services 4455 Genesee Street Buffalo, New York 14225				10. Work Unit No.	
				11. Contract or Grant No. DTNH22-01-C-01025	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Office of Vehicle Safety Compliance (NVS-220) 1200 New Jersey Ave, S.E. Washington, D.C. 20590				13. Type of Report and Period Covered Final Test Report October 2007	
				14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes					
16. Abstract  Compliance tests were conducted on the subject 2007 Honda Accord 4-door Sedan in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP-301-03 for the determination of FMVSS 301 compliance. Test failures identified were as follows:  The test vehicle appeared to comply with all requirements of FMVSS 301 "Fuel System Integrity."					
17. Key Words Compliance Testing Safety Engineering FMVSS 301			18. Distribution Statement <u>Copies of this report are available from:</u> NHTSA Technical Reference Division Room 5108 (NPO-230), 400 Seventh , S.W., Washington, D.C. 20590 Telephone No. (202) 366-4946		
19. Security Classif. (of this report) UNCLASSIFIED		20. Security Classif. (of this page) UNCLASSIFIED		21. No. of Pages 40	22. Price

## TABLE OF CONTENTS

<u>Section</u>		<u>Page No.</u>
1	PURPOSE OF COMPLIANCE TEST	1-1
2	COMPLIANCE TEST RESULTS SUMMARY	2-1
3	COMPLIANCE TEST DATA	3-1
	Data Sheet 1 – Test Vehicle Specifications	3-2
	Data Sheet 2 – Pre-Test Data	3-3
	Data Sheet 3 – Moving Barrier Data	3-5
	Data Sheet 4 – Post Test Data	3-6
	Data Sheet 5 – Static Rollover Test Data	3-8
	Data Sheet 6 – High Speed Camera Locations	3-9
APPENDIX A	PHOTOGRAPHS	A-1

## SECTION 1

### PURPOSE OF COMPLIANCE TEST

This 30 mph rear moving barrier impact test is part of the Federal Motor Vehicle Safety Standard (FMVSS) 301 Compliance Test Program conducted for the National Highway Traffic Safety Administration (NHTSA) by Advanced Information Engineering Services under Contract No. DTNH22-01-C-01025. The purpose of this test was to determine if the subject vehicle, a 2007 Honda Accord 4-door Sedan, meets the performance requirements of FMVSS No. 301, "Fuel System Integrity." This compliance test was conducted using the requirements found in the OVSC Laboratory Test Procedure No. TP-301-03, dated February 28, 2003.

## SECTION 2

### COMPLIANCE TEST RESULTS SUMMARY

A 1822.5 kg 2007 Honda Accord 4-door Sedan was impacted from the rear by an 1797 kg moving barrier at a velocity of 47.5 kph (29.5 mph). The test was performed by Advanced Information Engineering Services on October 9, 2007.

The test vehicle was equipped with a 64.7 liter fuel tank which was filled to 92 percent capacity with stoddard fluid prior to impact. Additional ballast (42 kg) was secured in the vehicle cargo area.

The crash event was recorded by seven high-speed cameras and one real-time camera. Camera locations and other pertinent camera information are found on pages 3-9 and 3-10 of this report. Pre- and post-test photographs of the vehicle can be found in Appendix A.

There was no fuel system fluid spillage following the impact or during any portion of the static rollover test. The average vehicle longitudinal crush was 331 millimeters. The vehicle appeared to comply with all the requirements of FMVSS No. 301 "Fuel System Integrity."

SECTION 3  
COMPLIANCE TEST DATA

DATA SHEET 1

TEST VEHICLE SPECIFICATIONS

TEST VEHICLE INFORMATION:

Year/Make/Model/Body Style: 2007 Honda Accord 4-door Sedan  
NHTSA No.: C75304 ; Color: Red  
Engine Data: 6 Cylinders; - CID; 3.0 Liters; - cc  
Placement: x Longitudinal or In-Line; - Transverse or Lateral  
Transmission Data: 5 Speeds; - Manual; x Automatic; - Overdrive  
Final Drive: - Rear Wheel Drive; x Front Wheel Drive; - Four Wheel Drive  
Major Options: x A/C; x Power Steering; x Power Brakes  
x Power Windows; x Power Door Locks; x Tilt Wheel  
Date Received: 7/27/07 ; Odometer Reading 253 km  
Selling Dealer: Wilde Honda  
& Address: 1710 HWY. 164 Waukesha, Wi 53186

DATA FROM VEHICLE'S CERTIFICATION LABEL:

Vehicle Manufactured by: Honda Motor Company  
Date of Manufacture: 09/06  
VIN: JHMCN36457C001081  
GVWR: 2070 kg; GAWR-FRONT: 1120 kg; GAWR-REAR: 970 kg

DATA FROM VEHICLE'S TIRE LABEL:

Location of Placard on Vehicle: Door A-pillar side sill  
Recommended Tire Size: P215/60R16  
\* Recommended Cold Tire Pressure: FRONT: 220 kPa; REAR: 220 kPa

DATA FROM TIRE SIDEWALL:

Size of Tires on Test Vehicle: P215/60R16 Manufacturer: Michelin  
Tire Pressure with Maximum Capacity Vehicle Load: FRONT: 300 kPa; REAR: 300 kPa  
Type of Spare Tire: Temporary

VEHICLE CAPACITY DATA:

Type of Front Seats: - Bench; x Bucket; - Split Bench  
Number of Occupants: 2 Front; 3 Rear; 5 Total  
Vehicle Capacity Weight (VCW) = 385 kg  
No. of Occupants x 68.04 kg = 340.2 kg  
Rated Cargo/Luggage Weight (RCLW) = 44.8 kg

\*Tire pressure used for test



DATA SHEET 2

PRE-TEST DATA

WEIGHT OF TEST VEHICLE AS RECEIVED FROM DEALER (with maximum fluids)= UDW:

Right Front	=	<u>494.0</u>	kg	Right Rear	=	<u>317.0</u>	kg
Left Front	=	<u>499.0</u>	kg.	Left Rear	=	<u>327.0</u>	kg
TOTAL FRONT	=	<u>993.0</u>	kg	TOTAL REAR	=	<u>644.0</u>	kg
TOTAL DELIVERED WEIGHT	=	<u>1637.0</u>	kg				
% of Total Front of Vehicle Weight	=	<u>60.7%</u>		of Total Rear Weight	=	<u>39.3%</u>	

CALCULATION OF VEHICLE'S TARGET TEST WEIGHT:

Total Delivered Weight	=	<u>1637.0</u>	kg
Rated Cargo/Luggage Weight (RCLW)	=	<u>44.8</u>	kg
Weight of 2 p.572 Dummies, 74.4 kg	=	<u>148.8</u>	kg
TARGET TEST WEIGHT	=	<u>1830.6</u>	kg

WEIGHT OF TEST VEHICLE WITH TWO DUMMIES AND 36.7 KG OF CARGO WEIGHT:

Right Front	=	<u>547.5</u>	kg	Right Rear	=	<u>356.5</u>	kg
Left Front	=	<u>552.0</u>	kg	Left Rear	=	<u>366.5</u>	kg
TOTAL FRONT	=	<u>1099.5</u>	kg	TOTAL REAR	=	<u>723.0</u>	kg
TOTAL TEST WEIGHT	=	<u>1822.5</u>	kg				
% of Total Front of Vehicle Weight	=	<u>60.3%</u>		of Total Rear Weight	=	<u>39.7%</u>	

\* Weight of Ballast Secured in Vehicle Trunk Area = 42 kg

Type of Ballast: Lead shot bags

Method of Securing Ballast: Compartment placement

Vehicle Components Removed for Weight Reduction: None

VEHICLE ATTITUDE (all dimension in millimeters):

AS DELIVERED:	RF	<u>719</u>	LF	<u>713</u>	RR	<u>707</u>	LR	<u>706</u>
AS TESTED:	RF	<u>703</u>	LF	<u>709</u>	RR	<u>691</u>	LR	<u>700</u>
Vehicle's Wheel Base:		<u>2740</u>	mm					
Location of Vehicle's C.G.:		<u>1087</u>	millimeters rearward of front wheel center.					

FUEL SYSTEM DATA:

Fuel System Capacity From Owner's Manual	=	<u>64.7</u>	liters
Usable Capacity Figure Furnished by COTR	=	<u>64.7</u>	liters
Test Volume Range (91 to 94% of Usable Capacity)	=	<u>58.88</u>	to <u>60.82</u> liters
ACTUAL TEST VOLUME=		<u>59.25</u>	liters (with entire fuel system filled)

\* Ballast weight includes the RCLW, the weight of drained vehicle fluids and the weight of any removed vehicle components less the weight of onboard instrumentation, cameras, and hardware.

DATA SHEET 2 (continued)

PRE-TEST DATA

FUEL SYSTEM DATA (continued):

Test Fluid Type: Stoddard Solution

Test Fluid Specific Gravity: 0.764

Test Fluid Kinematic Viscosity: 0.96 centistokes

Test Fluid Color: Orange ("red" is preferred)

Type of Vehicle Fuel Pump: Electric

Electric Fuel Pump Operation with Ignition Switch ON and Engine OFF -

Fuel pump operated.

Details of Fuel System: Fuel filler is on left rear quarter panel with fuel lines running along left frame rail.

Comments: None

DATA SHEET 3

MOVING BARRIER DATA

WEIGHT OF MOVING BARRIER:

Right Front = 504.9 kg      Right Rear = 393.7 kg.  
Left Front = 499.9 kg      Left Rear = 398.3 kg  
TOTAL FRONT = 1004.8 kg      TOTAL REAR = 792.0 kg  
TOTAL BARRIER WEIGHT = 1796.8 kg

MOVING BARRIER DIMENSIONS:


Barrier Face Height: 1524 mm  
Barrier Face Width: 1981 mm  
Barrier Face Ground Clearance: 127 mm  
Tread Width: 1511 mm  
Wheel Base: 3048 mm  
Location of C.G.: X: 1344 mm rearward of front wheel center.  
Y: 0 mm from longitudinal-vertical plane of symmetry.  
Z: 414 mm above ground.

MOVING BARRIER TIRES:

Manufacturer: Dunlop  
Model: AT Radial Rover  
Size: P205/75R15  
Recommended Max Pressure: 240 kPa:

MOVING BARRIER ABORT SYSTEM:

Type: Trailing cable

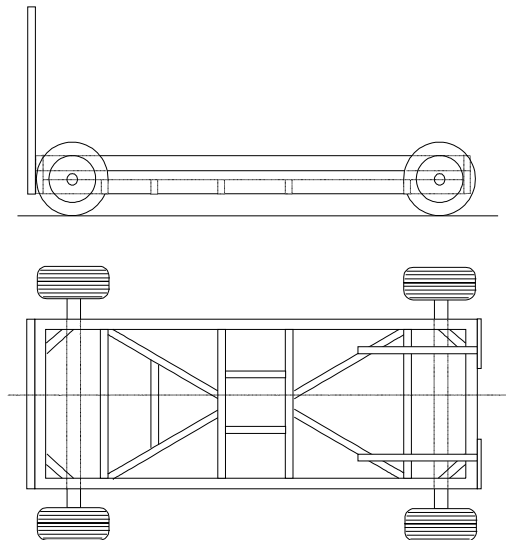

DATA SHEET 4

POST TEST DATA

TYPE OF TEST:

Type of Test: Rear Barrier Impact Angle: 0°  
Test Date: October 9, 2007 Time: 11:30 Temperature: 20 °C  
Vehicle NHTSA No.: C75304 VIN: JHMCN36457C001081  
Required Impact Velocity Range: 46.51 to 48.12 kph

BARRIER IMPACT VELOCITY: (Speed traps within 5 feet of impact plane.)

Trap No. 1 = 47.5 kph; Trap No. 2 = 47.5 kph  
Average Impact Speed = 47.5 kph

VEHICLE STATIC CRUSH:

Vehicle Length:

Pre-Test Left = 4775 ; C/L = 4854 Right = 4775  
Post-Test Left = 4443 ; C/L = 4521 Right = 4446  
Crush Left = 332 ; C/L = 333 Right = 329  
AVERAGE = 331 millimeters

DATA SHEET 4 (continued)

POST TEST DATA

TEST VEHICLE NHTSA NO.: C75304 TEST DATE: October 9, 2007


Vehicle Mfgr./Make/Model: 2007 Honda Accord 4-door Sedan

Test vehicle fuel tank filled to 91% to 94% of manufacturer's "usable" capacity and with electric fuel pump operating (if it will operate without engine operation). Part 572 test dummies located at each front designated seating position.

\*\*\*\*\*

- TEST VEHICLE IMPACT TYPE:
- Frontal (42.28 kph target velocity)
  - Oblique (42.28 kph target velocity) with      -     ° barrier face first contacting      -      (driver/passenger) side
  - X Rear Moving Barrier (42.28 kph target velocity)
  - Lateral Moving Barrier (32.19 kph target velocity)

FUEL SPILLAGE MEASUREMENT:

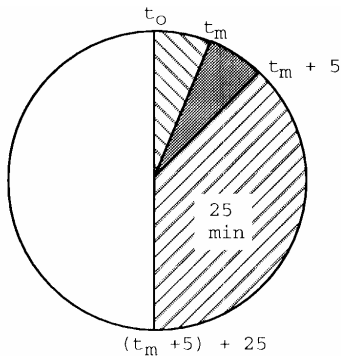

1. From impact until vehicle motion ceases
2. For five minute period after vehicle motion ceases
3. For next 25 minutes

ACTUAL	MAX ALLOWED
0	28 g
0	28 g.
0	28 g/min.

SOLVENT SPILLAGE DETAILS:

None


DATA SHEET 5

STATIC ROLLOVER TEST DATA

Table 7 FMVSS NO. 301 - STATIC ROLLOVER DATA SHEET

Vehicle: 2007 Honda Accord 4-door Sedan

NHTSA No.: C75304

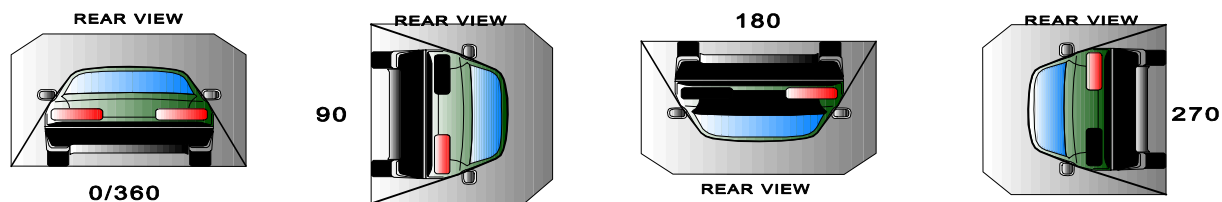

I. DETERMINATION OF SOLVENT COLLECTION TIME PERIOD:

Rollover Stage	Rotation Time (spec. 1 -3 min)				FMVSS 301 Hold Time		Total Time				Next Whole Minute Interval	
	1	minutes	06	seconds	5	minutes	6	minutes	6	seconds	7	minutes
0° - 90°	0	minutes	59	seconds	5	minutes	5	minutes	59	seconds	6	minutes
180°-270°	0	minutes	59	seconds	5	minutes	5	minutes	59	seconds	6	minutes
270°-360°	1	minutes	02	seconds	5	minutes	6	minutes	2	seconds	7	minutes

II. FMVSS 301 REQUIREMENTS: (Maximum allowable solvent spillage):

First 5 minutes from onset of rotation	6th min.	7th min.	8th min. (if required)
142 g	28 g	28 g	28 g

III. ACTUAL TEST VEHICLE SOLVENT SPILLAGE:

Rollover Stage	First 5 minutes from onset of rotation (g)	6th min. (g)	7th min. (g)	8th min. (if required) (g)
0° - 90°	0	0	0	-
90° - 180°	0	0	-	-
180°-270°	0	0	-	-
270°-360°	0	0	0	-


Note: Record spillage for whole minute intervals only as determined above.

IV. SOLVENT SPILLAGE LOCATION(S):

Rollover Stage	Spillage Location
0° - 90°	None
90° - 180°	None
180°-270°	None
270°-360°	None

DATA SHEET 6


HIGH SPEED CAMERA LOCATIONS

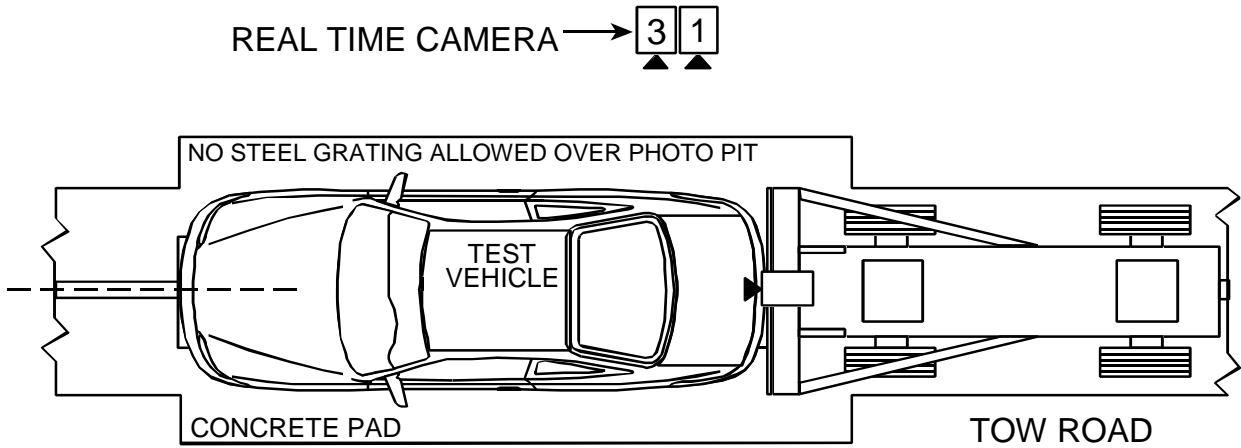

[2]

TOP VIEW

This caption indicates the top view of the test vehicle and tow road. A small box containing the number 2 is positioned above the vehicle.

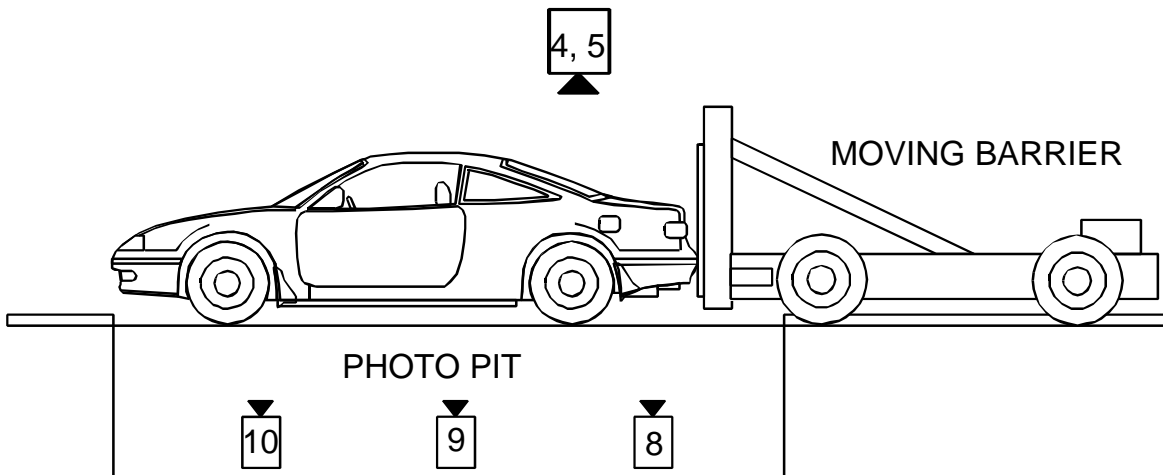

LEFT SIDE VIEW

This caption indicates the left side view of the test vehicle and tow road. A small box containing the numbers 4 and 5 is positioned above the vehicle.

DATA SHEET 6 (continued)

HIGH SPEED CAMERA LOCATIONS

NHTSA No. : C75304

Vehicle : 2007 Honda Accord 4-door Sedan

CAMERA NO.	VIEW	CAMERA POSITIONS (mm)*			ANGLE** (degrees)	LENS (mm)	SPEED (fps)
		X	Y	Z			
1	Real-Time Camera	-	-	-	-	-	24
2	Left Side View	1846	8139	1119	-1.0	13	1000
3	Right Side View	1795	8083	1086	-3.9	35	1000
4	Overhead Overall View	-508	0	9804	-90	13	1000
5	Overhead Close View	-508	0	9804	-105	13	1000
6†	Onboard Driver View	-	-	-	-	-	-
7†	Onboard Passenger View	-	-	-	-	-	-
8	Vehicle Rear Underbody View	0	2732	-1956	90	13	1000
9	Vehicle Mid-Section Underbody View	0	1894	-1956	90	13	1000
10	Vehicle Front Underbody View	0	953	-1956	90	13	1000

- \* X = film plant to monorail centerline (+ to left of rail)
- Y = film plane to impact location (+ ahead of impact location)
- Z = film plane to ground (+ above ground)
- \*\* = referenced to horizontal plane

† Research cameras – X distance is measured to the reference target plane.



Appendix A  
PHOTOGRAPHS

LIST OF PHOTOGRAPHS

<u>Figure</u>	<u>Photograph Title</u>	<u>Page</u>
A-1	PRE-TEST FRONT VIEW	A-3
A-2	POST-TEST FRONT VIEW	A-4
A-3	PRE-TEST LEFT SIDE VIEW	A-5
A-4	POST-TEST LEFT SIDE VIEW	A-6
A-5	PRE-TEST RIGHT SIDE VIEW	A-7
A-6	POST-TEST RIGHT SIDE VIEW	A-8
A-7	PRE-TEST REAR VIEW	A-9
A-8	POST-TEST REAR VIEW	A-10
A-9	PRE-TEST LEFT FRONT THREE-QUARTER VIEW	A-11
A-10	POST-TEST LEFT FRONT THREE-QUARTER VIEW	A-12
A-11	PRE-TEST RIGHT REAR THREE-QUARTER VIEW	A-13
A-12	POST-TEST RIGHT REAR THREE-QUARTER VIEW	A-14
A-13	PRE-TEST FRONT UNDERBODY VIEW	A-15
A-14	POST-TEST FRONT UNDERBODY VIEW	A-16
A-15	PRE-TEST REAR UNDERBODY VIEW	A-17
A-16	POST-TEST REAR UNDERBODY VIEW	A-18
A-17	CERTIFICATION PLACARD	A-19
A-18	TIRE PLACARD	A-20
A-19	ROLLOVER 90E	A-21
A-20	ROLLOVER 180E	A-22
A-21	ROLLOVER 270E	A-23
A-22	ROLLOVER 360E	A-24



Figure A-1 PRE-TEST FRONT VIEW



Figure A-2 POST-TEST FRONT VIEW



Figure A-3 PRE-TEST LEFT SIDE VIEW



Figure A-4 POST-TEST LEFT SIDE VIEW



Figure A-5 PRE-TEST RIGHT SIDE VIEW



Figure A-6 POST-TEST RIGHT SIDE VIEW





Figure A-7 PRE-TEST REAR VIEW

A-10

8832-F301-05



Figure A-8 POST-TEST REAR VIEW



Figure A-9 PRE-TEST LEFT FRONT THREE-QUARTER VIEW



Figure A-10 POST-TEST LEFT FRONT THREE-QUARTER VIEW



Figure A-11 PRE-TEST RIGHT REAR THREE-QUARTER VIEW



Figure A-12 POST-TEST RIGHT REAR THREE-QUARTER VIEW



Figure A-13 PRE-TEST FRONT UNDERBODY VIEW



A-16


8832-F301-05

Figure A-14 POST-TEST FRONT UNDERBODY VIEW





Figure A-15 PRE-TEST REAR UNDERBODY VIEW

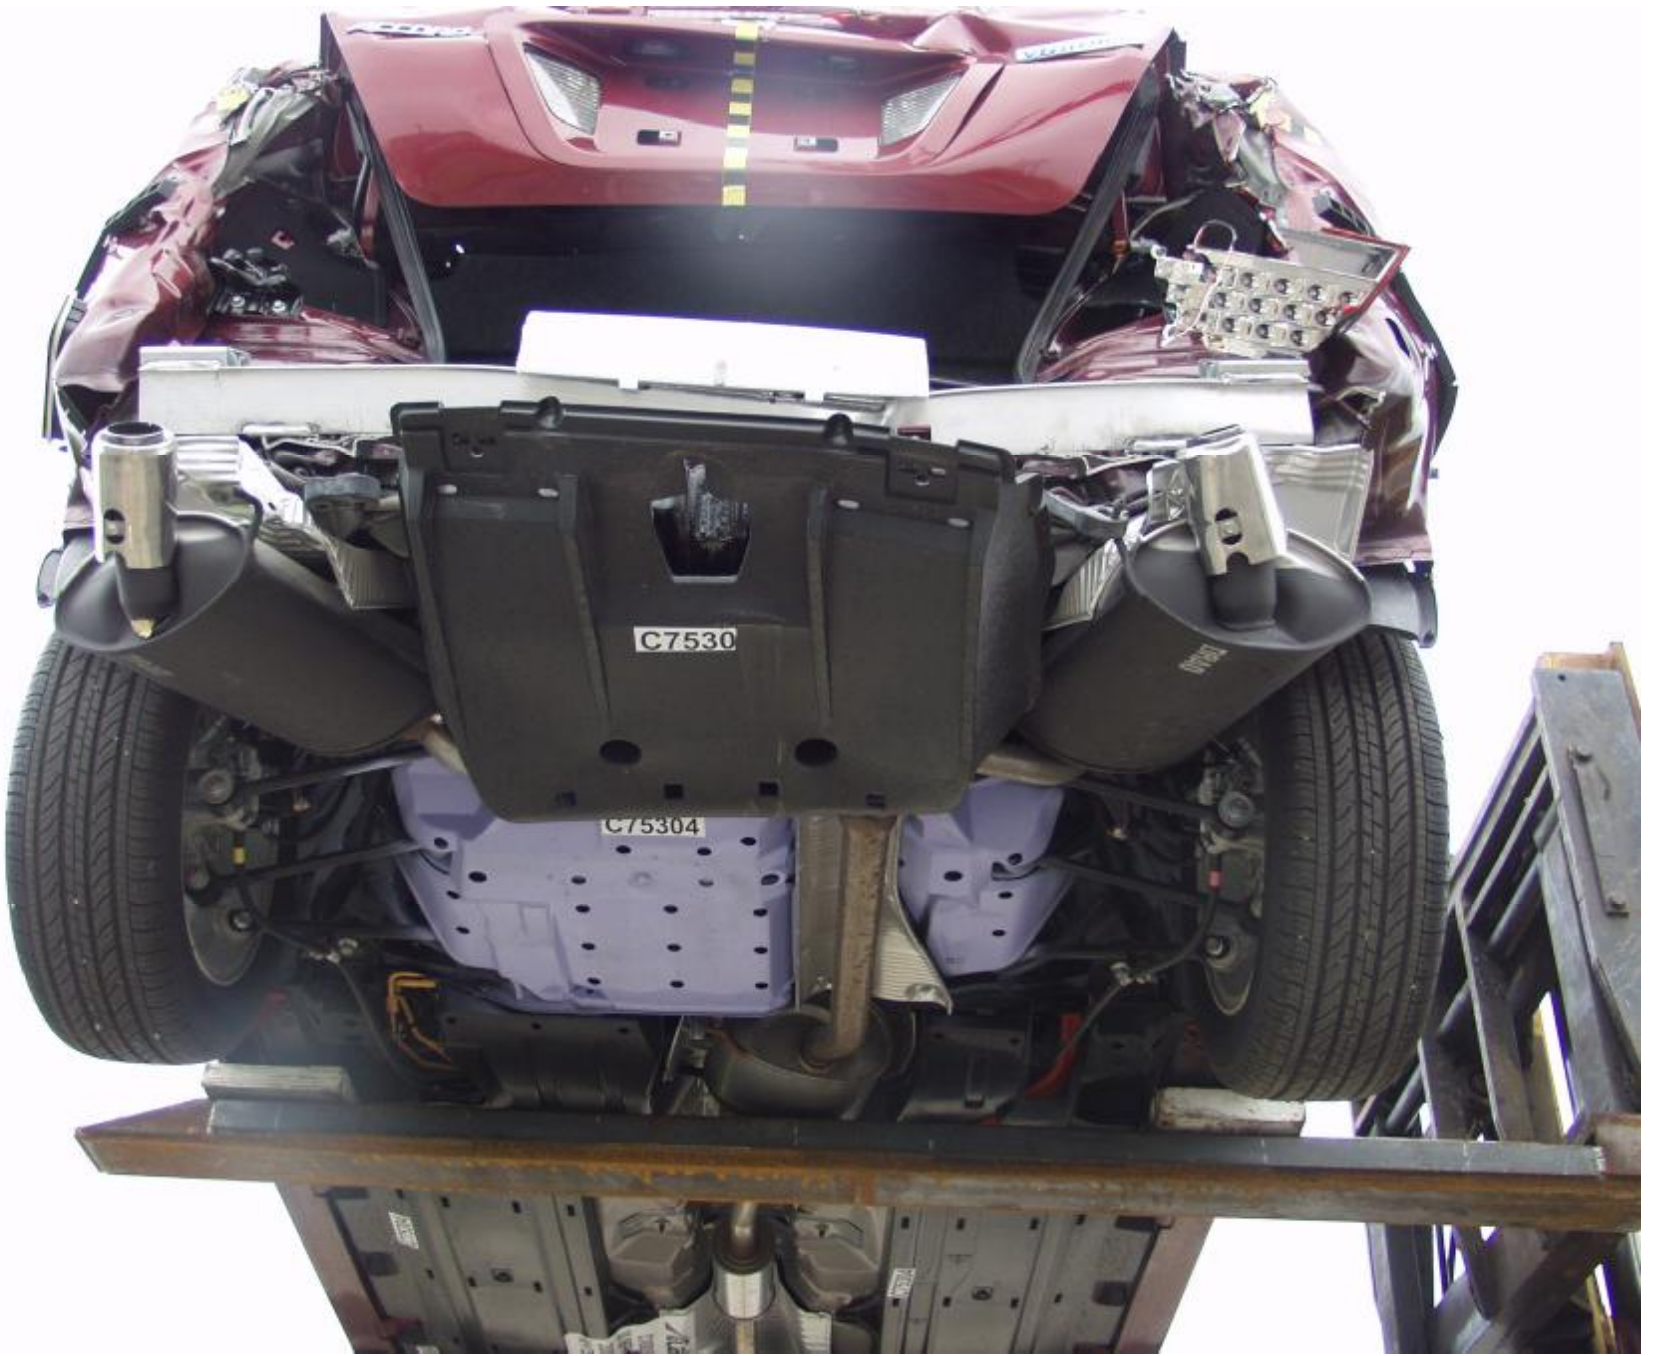

A-18

8832-F301-05

Figure A-16 POST-TEST REAR UNDERBODY VIEW



Figure A-17 CERTIFICATION PLACARD



Figure A-18 TIRE PLACARD



Figure A-19 ROLLOVER 90°



Figure A-20 ROLLOVER 180°

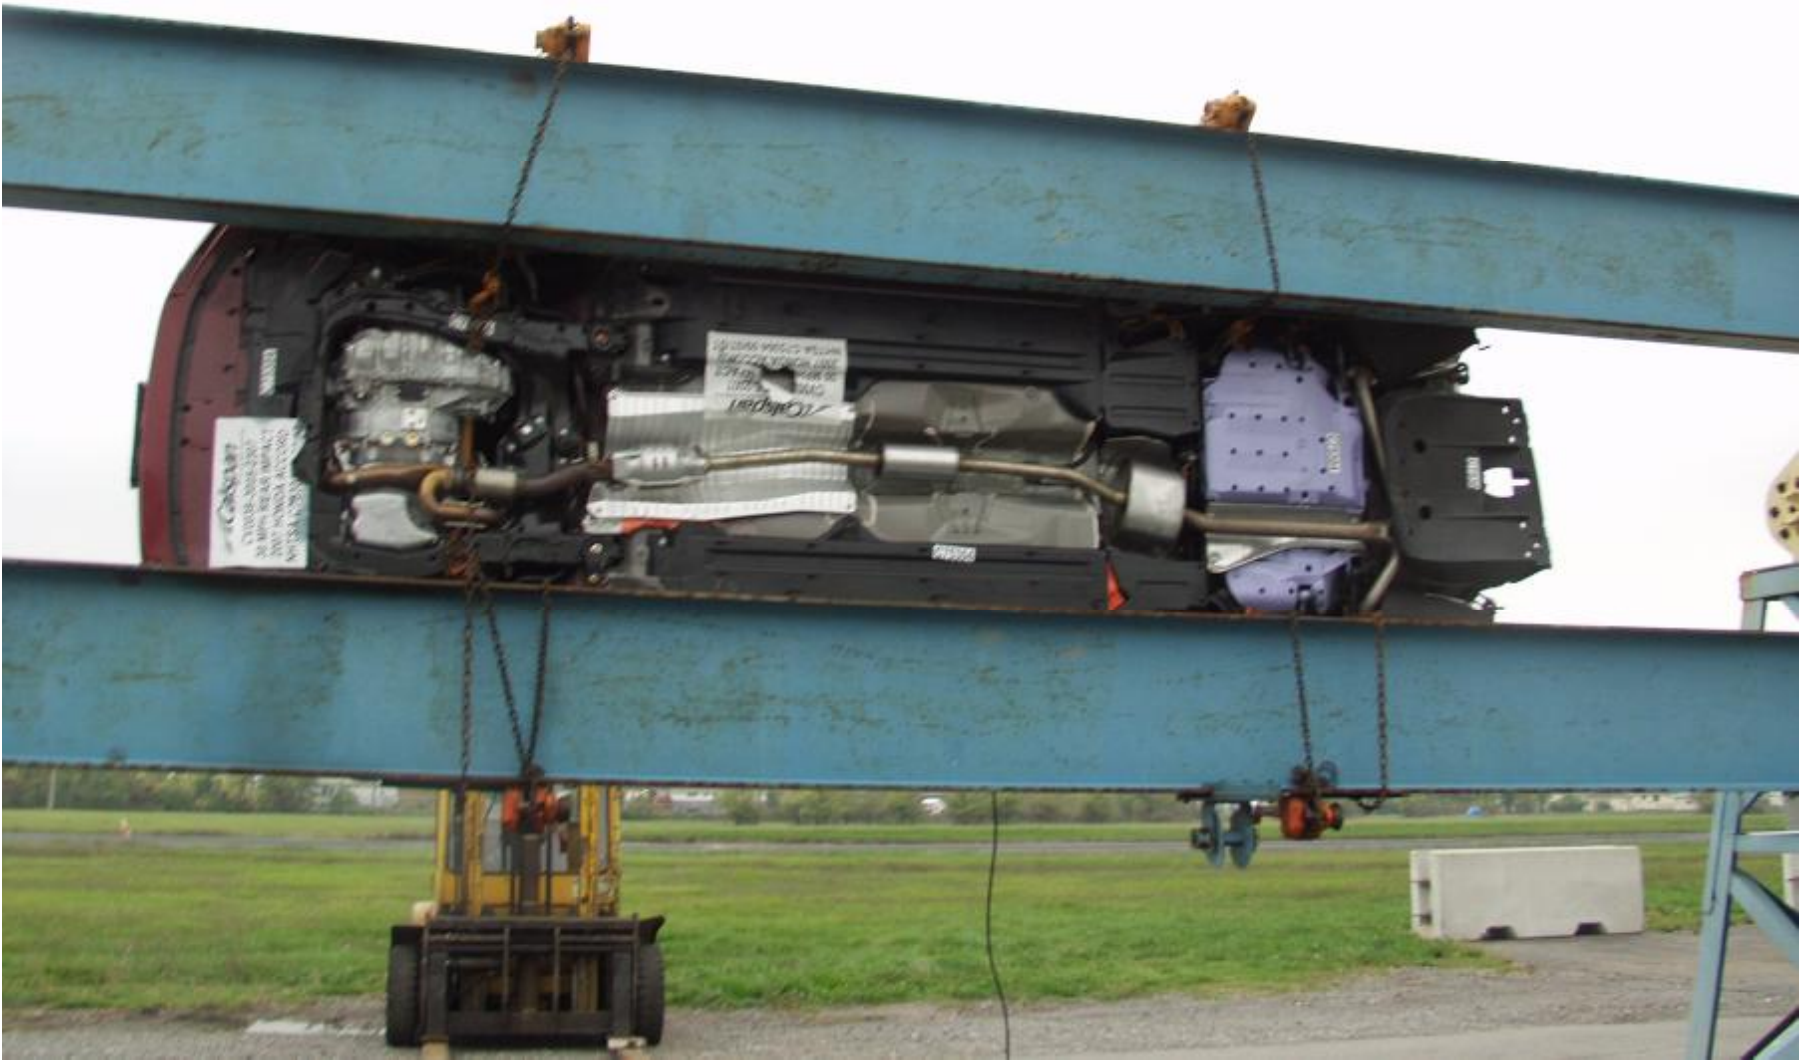


Figure A-21 ROLLOVER 270°



Figure A-22 ROLLOVER 360°