

**REPORT NO. 111-KAR-08-005**

**SAFETY COMPLIANCE TESTING  
FOR FMVSS 111**

**REARVIEW MIRRORS  
(Other Than School Buses)**

**2009 TOYOTA COROLLA LE  
4-DOOR SEDAN**

**NHTSA NO: C95103**

**PREPARED BY:  
KARCO ENGINEERING LLC.  
9270 HOLLY ROAD  
ADELANTO, CALIFORNIA 92301**



**AUGUST 27, 2008**


**FINAL REPORT**


**PREPARED FOR:  
U.S. DEPARTMENT OF TRANSPORTATION  
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION  
ENFORCEMENT  
OFFICE OF VEHICLE SAFETY COMPLIANCE  
MAIL CODE: NVS-221  
1200 NEW JERSEY AVE SE, ROOM W43-498  
WASHINGTON, D.C. 20590**

This final test report was prepared for the U.S. Department of Transportation, National Highway Traffic Safety Administration, under Contract DTNH22-06-C-00034.


This publication is distributed by the U.S. Department of Transportation, National Highway Traffic Safety Administration in the interest of information exchange. The opinions, findings and conclusions expressed in this publication are those of the author(s) and not necessarily those of the Department of Transportation or the National Highway Traffic Safety Administration. The United States Government assumes no liability for its contents or use thereof. If trade or manufacturers' names or products are mentioned, it is only because they are considered essential to the object of the publication and should not be construed as an endorsement. The United States Government does not endorse products or manufacturers.

Prepared by:  Date: August 27, 2008  
Mr. Jonathan F. Williams, Test Engineer  
KARCO Engineering, LLC.

Reviewed by:  Date: August 27, 2008  
Mr. Michael L. Dunlap, Director of Operations  
KARCO Engineering, LLC.

Approved by:  Date: August 27, 2008  
Mr. Frank D. Richardson, Program Manager  
KARCO Engineering, LLC.

FINAL REPORT ACCEPTED BY:

  
Accepted By: \_\_\_\_\_

Acceptance Date: September 12, 2008

## Technical Report Documentation Page

1. <i>Report No.</i> 111-KAR-08-005	2. <i>Government Accession No.</i>	3. <i>Recipient's Catalog No.</i>	
4. <i>Title and Subtitle</i> Final Report of FMVSS 111 Compliance Testing of 2009 Toyota Corolla LE 4-Door Sedan NHTSA NO: C95103		5. <i>Report Date</i> August 27, 2008	
		6. <i>Performing Organization Code</i> KAR	
7. <i>Author(s)</i> Mr. Jonathan F. Williams, Test Engineer, KARCO Mr. Frank D. Richardson, Program Manager, KARCO		8. <i>Performing Organization Report No.</i> P28011-05	
9. <i>Performing Organization Name and Address</i> KARCO Engineering LLC. 9270 Holly Road Adelanto, California 92301		10. <i>Work unit No.</i>	
		11. <i>Contract or Grant No.</i> DTNH22-06-C-00034	
12. <i>Sponsoring Agency Name and Address</i> U.S. Department of Transportation National Highway Traffic Safety Administration Enforcement Office of Vehicle Safety Compliance Mail Code: NVS-221 1200 New Jersey Ave SE, Room W43-410 Washington, DC 20590		13. <i>Type of report and Period Covered</i> Final Report-	
		14. <i>Sponsoring Agency Code</i> NVS 221	
15. <i>Supplementary Notes</i>			
16. <i>Abstract</i>  Compliance tests were conducted on the subject 2009 Toyota Corolla LE 4-Door Sedan on August 1, 2008 through August 27, 2008 in accordance with the specifications of the Office of Vehicle Safety Compliance Test Procedure No. TP111V-00 for the determination of FMVSS 111 compliance. There were no apparent test failures.			
17. <i>Key Words</i>  Compliance Testing Safety Engineering FMVSS 111		18. <i>Distribution Statement</i> Copies of this report are available from: National Highway Traffic Safety Admin. Technical Information Services (TIS) Mail Code: NVS-221 1200 New Jersey Ave SE, Room W43-410 Washington, DC 20590	
19. <i>Security Classification (of this report)</i> UNCLASSIFIED	20. <i>Security Classification (of this page)</i> UNCLASSIFIED	21. <i>No. of Pages</i>  67	22. <i>Price</i>

Form DOT F1700.7 (8-72)

111-KAR-08-005

## TABLE OF CONTENTS

<u>Section</u>		<u>Page</u>
1	Purpose of Compliance Test	1
2	Compliance Test Procedure and Data Summary	2
3	Test Data	5
<u>Appendix</u>		
A	Photographs	A
B	Data Plots	B
C	Test Equipment List and Calibration Information	C
D	Eyelipse Locations Supplied by Manufacturer	D

## LIST OF PHOTOGRAPHS

<u>Figure</u>		<u>Page</u>
1	Left Front $\frac{3}{4}$ View	A-1
2	Left Side View	A-2
3	Right Rear $\frac{3}{4}$ View	A-3
4	Right Side View	A-4
5	Manufacturer's Label	A-5
6	Tire Placard	A-6
7	Driver Side Rearview Mirror and Mounting	A-7
8	Passenger Side Rearview Mirror and Mounting	A-8
9	Inside Rearview Mirror and Mounting	A-9
10	Test Set-up	A-10
11	Camera Set-up for Photographing Reference Board	A-11
12	Overall Set-up and Instrumentation for Mirror Break-Away Test	A-12
13	Close-Up of Mirror Break-Away Test	A-13
14	Reflection Test Set-up	A-14
15	Mirror Set-up for Area Measurement	A-15
16	Left Eye Field of View Test (Inside Mirror)	A-16
17	Reference Board for Inside Mirror, Left Eye (From Rear of Vehicle)	A-17
18	Right Eye Field of View Test (Inside Mirror)	A-18
19	Reference Board for Inside Mirror, Right Eye (From Rear of Vehicle)	A-19
20	Left Eye Field of View Test (Driver Side Mirror)	A-20
21	Right Eye Field of View Test (Driver Side Mirror)	A-21
22	Reference Board for Driver Side Mirror (From Rear of Vehicle)	A-22

## LIST OF DATA PLOTS

<u>Figure</u>		<u>Page</u>
B-1	Force vs. Displacement and Displacement vs. Time $0^\circ/90^\circ$	B-1
B-2	Force vs. Displacement and Displacement vs. Time $45^\circ/90^\circ$	B-2
B-3	Force vs. Displacement and Displacement vs. Time $-45^\circ/90^\circ$	B-3
B-4	Force vs. Displacement and Displacement vs. Time $-45^\circ/45^\circ$	B-4
B-5	Force vs. Displacement and Displacement vs. Time $45^\circ/45^\circ$	B-5
B-6	Force vs. Displacement and Displacement vs. Time $45^\circ/-45^\circ$	B-6
B-7	Force vs. Displacement and Displacement vs. Time $-45^\circ/-45^\circ$	B-7

## 1. PURPOSE OF COMPLIANCE TEST

Tests were conducted on a 2009 Toyota Corolla LE 4-Door Sedan, manufactured by Toyota Motor Company, to determine compliance with FMVSS 111, "Rearview Mirrors (Other than School Buses)". The purpose of this standard is to reduce the number of deaths and injuries that occur when the driver of a motor vehicle does not have a clear and reasonably unobstructed view to the rear.

All tests were conducted based on the current National Highway Traffic Safety Administration (NHTSA), Office of Vehicle Safety Compliance (OVSC) Laboratory Procedures, TP111V-00, dated October 28, 1999, and corresponding KARCO Engineering test procedure KTP-111, dated April 18, 2001. Detailed procedures for receiving, inspecting, testing and reporting of test results are described in the test procedures and are not repeated in this report.

This report is organized in sections containing pertinent test information and data tables as follows:

Section 1	Purpose of Compliance Test
Section 2	Compliance Test Procedure and Data Summary
Section 3	Test Results
Appendix A	Photographs
Appendix B	Data Plots
Appendix C	Test Equipment List and Calibration Information
Appendix D	Eyellipse Location Supplied By Manufacturer

## **2. COMPLIANCE TEST PROCEDURE AND DATA SUMMARY**

A 2009 Toyota Corolla LE 4-Door Sedan was subjected to FMVSS 111 compliance testing. The tests were conducted at KARCO Engineering LLC. in Adelanto, California on August 1, 2008 though August 27, 2008. Summary data is shown on page 24, Data Sheet No. 8. The following tests were performed:

- Inspection
- Mounting Adequacy Test
- Field-of-View Test, Inside Rearview Mirror
- Field-of-View Test, Driver's Side Outside Mirror
- Reflectance Test
- Breakaway Test
- Unit Magnification and Convex Mirror Tests

The tests were conducted per the FMVSS 111 test procedure. The significant aspects of the test procedure are described in the following paragraphs.

### **A. INSPECTION**

Inspect the installation of the inside and outside rearview mirrors.

### **B. MOUNTING ADEQUACY TEST – ALL REARVIEW MIRRORS**

#### **B.1 INSIDE MIRROR (S5.1.2)**

Determine that the mirror is securely mounted and determine the positive and negative angles of adjustment for both the vertical and horizontal directions.

#### **B.2 OUTSIDE MIRROR(S) (S5.2.2 and S5.3)**

Determine that the mirror(s) is (are) securely mounted. Determine that the driver's side mirror can be tilted in both horizontal and vertical directions from the driver's seated position. Determine that the passenger's side mirror is capable of adjustment by tilting in both the horizontal and vertical directions. Determine the positive and negative angles of adjustment for both horizontal and vertical directions for all outside mirrors. Determine that all outside mirrors are free of sharp points or edges that could contribute to pedestrian injury.

**C. FIELD-OF-VIEW TEST – INSIDE REARVIEW MIRROR**

**C.1 REQUIREMENTS (S5.1.1)**

The mirror shall provide a field of view with an included horizontal angle measured from the projected eye point of at least 20 degrees, and sufficient vertical angle to provide a view of a level road surface extending to the horizon beginning at a point not greater than 61m (200 feet) to the rear of the vehicle when the vehicle is occupied by the driver and four passengers or the designated occupant capacity, if less. The line of sight may be partially obscured by seated occupants or by head restraints.

Each car whose inside mirror does not meet the field of view requirements of S5.1.1 shall have an outside mirror of unit magnification or a convex mirror installed on the passenger's side. (S5.3)

**D. FIELD-OF-VIEW TEST, DRIVER'S SIDE OUTSIDE REARVIEW MIRROR**

**D.1 REQUIREMENTS (S5.2)**

Each passenger car shall have an outside mirror of unit magnification. The mirror shall provide the driver a view of a level road surface extending to the horizon from a line, perpendicular to a longitudinal plane tangent to the driver's side of the vehicle at the widest point, extending 2.4 meters (8 feet) out from the tangent plane 10.7 meters (35 feet) behind the driver's eyes, with the seat in the rearmost position. The line of sight may be partially obscured by rear body or fender contours. (S5.2.1)

Neither the mirror nor the mounting shall protrude farther than the widest part of the vehicle body except to the extent necessary to produce a field of view meeting or exceeding the requirements of S5.2.1. The mirror shall not be obscured by the un-wiped portion of the windshield. (S5.2.2)

**E. REFLECTANCE TEST – ALL MIRRORS**

**E.1 REQUIREMENT (S11)**

All single reflectance mirrors shall have an average reflectance of at least 35 percent. If a mirror is capable of multiple reflectance levels, the minimum reflectance level in the day mode shall be at least 35 percent and the minimum reflectance level in the night mode shall be at least 4 percent. The average reflectance of any mirror required by this standard shall be determined in accordance with SAE Recommended Practice J964, OCT 84.

**F. BREAKAWAY TEST – INSIDE REARVIEW MIRROR**

**F.1 REQUIREMENTS (S5.1.2)**

If the mirror is in the head impact area, the mounting shall deflect, collapse, or break away without leaving sharp edges when the reflective surface of the mirror is subjected to a force of 400 N (90 lb) in any forward direction that is not more than 45 degrees from the longitudinal direction.



## **G. UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

### **G.1 REQUIREMENTS FOR PASSENGER CARS (S5.3 and S5.4)**

The driver's side rearview mirror and the inside rearview mirror shall be unit magnification. If the field-of-view requirements are not met with the inside rearview mirror then the passenger's side rearview mirror is required. It can be either unit magnification or convex.

If the passenger's side mirror is convex, the average radius of curvature shall be not less than 889 mm (35 inches) and not more than 1651 millimeters (65 inches) and shall not deviate from the average by more than plus or minus 12.5 percent. The convex mirror shall have permanently and indelibly marked at the lower edge of the mirror's reflective surface in letters not less than 4.8 mm (3/16 inch) nor more than 6.4 mm (0.25 inch) high the words, "**Objects in Mirror Are Closer Than They Appear.**"

### **3. TEST DATA**

The results of FMVSS 111 compliance tests that were conducted on the 2009 Toyota Corolla LE 4-Door Sedan on August 1, 2008 through August 27, 2008 to determine compliance with FMVSS 111, "Rearview Mirrors (other than School Buses)" are presented in this section.

**DATA SHEET NO. 1**

**VEHICLE INSPECTION AND IDENTIFICATION**

Model	CorollaLE
Body Style	4-Door Sedan
Vin No.	JTDBL40E29J001449
Color	Green
Delivery Date	7/28/2008
Odometer (Miles)	158
Dealer	West-Herr Toyota
Transmission	Automatic
Final Drive	Front
Type/No. Cyl.	4
Engine Disp. (L)	1.8
Engine Placement	Transverse
Tire Press./ Max (Front)	350 kPa
Tire Press./ Max (Rear)	350 kPa
Recommended Tire Size	P195/65R15
Tire Size on vehicle	P195/65R15
Air Conditioning	Yes
Disc Brakes (Front)	Yes
Disc Brakes (Rear)	Yes

Power Steering	Yes
Driver Front Airbag	Yes
Driver Side Airbag	Yes
Driver Head Airbag	No
Driver Curtain Airbag	Yes
Pass. Airbag	Yes
Pass. Side Airbag	Yes
Pass. Head Airbag	No
Pass. Curtain Airbag	Yes
Pre-Tensioners	Yes
Load Limiters	Yes
Bucket Seats	Yes
Cold Tire Press. (Front)	210 kPa
Cold Tire Press. (Rear)	210 kPa
Tilt Steering	Yes
Automatic Door Locks	Yes
Power Windows	Yes
Power Seats	No
Other	N/A

**DATA FROM MANUFACTURER**

Manufactured By	Toyota Motor Corporation
Date of Manufacture	Jan-08

GVWR (kg)	1579
GAWR Front (kg)	948
GAWR Rear (kg)	839

**TEST VEHICLE ATTITUDES (mm)**

ATTITUDE	LF	RF	LR	RR
As Delivered	688	686	713	714
As Tested	666	663	662	663
Rearview Mirror	1249			

**DATA SHEET NO. 1... (Continued)**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Toyota
<b>Model:</b>	Corolla LE	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95103	<b>VIN</b>	JTDBL40E29J001449
<b>Test Date:</b>	08/01/08	<b>Temperature:</b>	85°F

LEGEND: LE = Left Eye; RE = Right Eye; P = Neck Pivot Point, SRP = Seating Reference Point

COORDINATE SYSTEM:

- X = Longitudinal Dimension
- Y = Lateral Dimension
- Z = Vertical Dimension

Positive Values are as follows:

- X = Forward of Reference Point
- Y = Outboard of Reference Point (to driver's side)
- Z = Above Reference Point

Provide Reference Point or Body Fiducial Point that dimensions below are measured from. (Point should be usable by laboratory personnel, i.e., center of an anchorage bolt, door jam latch, etc.).

COORDINATES	LEFT SIDE MIRROR			INSIDE MIRROR			RIGHT SIDE MIRROR			SRP
	P1	LE1	RE1	P2	LE2	RE2	P3	LE3	RE3	
<b>X</b>		99.4	113		113.9	91		N/A	N/A	
<b>Y</b>		390.9	454.2		406	466.9		N/A	N/A	
<b>Z</b>		406.9	406.9		406.8	407		N/A	N/A	
<b>Mirror Mfr., Model And Part No.</b>	MURAKAMI CORP. MIRROR ASSY OUTER RR VIEW, LH 87940-12C60 87940-12D80			MURAKAMI CORP. MIRROR ASSY INNER RR VIEW 87810-60191			MURAKAMI CORP. MIRROR ASSY OUTER RR VIEW, RH 87910-12C60 87910-12D80			
<b>SRP Travel and Eye-ellipse</b>										

Reference Point – Upper Tightening Hole of B Pillar Striker on Driver Side. (See Page 4 of appendix D)



**DATA SHEET NO. 2**  
**MOUNTING AND TILTING ADEQUACY TEST**

Vehicle Information			
Year:	2009	Make	Toyota
Model:	Corolla LE	Body Style	4-Door Sedan
NHTSA No:	C95103	VIN	JTDBL40E29J001449
Test Date:	08/01/08	Temperature:	65°F

MIRROR MOUNTING PROVIDES A STABLE SUPPORT	PASS	FAIL	CONDITIONAL
INSIDE REARVIEW MIRROR	X		
DRIVER SIDE OUTSIDE MIRROR	X		
PASSENGER SIDE OUTSIDE MIRROR	X		

OUTSIDE MIRRORS FREE OF SHARP POINTS OR EDGES	PASS	FAIL
DRIVER SIDE OUTSIDE MIRROR	X	
PASSENGER SIDE OUTSIDE MIRROR	X	

MIRROR IS ADJUSTABLE VERTICALLY & HORIZONTALLY	PASS	FAIL	CONDITIONAL
INSIDE REARVIEW MIRROR	X		
DRIVER SIDE OUTSIDE MIRROR	X		
PASSENGER SIDE OUTSIDE MIRROR	X		

DRIVER'S OUTSIDE MIRROR ADJUSTABLE FROM THE DRIVER'S SEATED POSITION	PASS	FAIL
DRIVER SIDE OUTSIDE MIRROR	X	

MIRROR ADJUSTMENT ANGLE	V+	V-	H+	H-
INSIDE REARVIEW MIRROR	34°	-59.7°	52°	-58°
DRIVER SIDE OUTSIDE MIRROR	14.2°	-4.6°	13°	-4°
PASSENGER SIDE OUTSIDE MIRROR	114.2°	-4.7°	33°	-19°

THIS SECTION IS RESERVED FOR MPVs, TRUCKS AND BUSES, OTHER THAN SCHOOL BUSES, NOT CONFORMING TO PASSENGER CAR REQUIREMENTS

MIRROR PROVIDES A VIEW TO THE REAR ALONG BOTH SIDES OF THE VEHICLE	PASS	FAIL	CONDITIONAL
DRIVER SIDE OUTSIDE MIRROR	N/A		
PASSENGER SIDE OUTSIDE MIRROR	N/A		

TEST STATUS:	PASSED —	X	FAILED —	
--------------	----------	---	----------	--

RECORDED BY: JONATHAN WILLIAMS DATE: 08/27/08

APPROVED BY: MICHAEL L. DUNLAP DATE: 08/27/08

**DATA SHEET NO. 3**  
**FIELD OF VIEW TEST - INSIDE REARVIEW MIRROR**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Toyota
<b>Model:</b>	Corolla LE	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95103	<b>VIN</b>	JTDBL40E29J001449
<b>Test Date:</b>	08/01/08	<b>Temperature:</b>	85°F

- E Distance from center of mirror to projected eye point location = 660.0 mm
- A Distance from rear of vehicle to projected eye point location = 3301.0 mm
- X1 Distance from rear of vehicle to field of view grid = 8417.0 mm
- Z1 Vertical distance to lowest point of field of view at distance X1 = 295.0 mm
- Z2 Height of center of mirror = 1249.0 mm
- X2 Distance from rear of vehicle where the road surface is first visible  
 $X2 = [(Z2 \times X1) + (Z1 \times A)] / (Z2 - Z1) =$   
(S111 REQUIREMENT = 61m maximum) 12040.5 mm (12.04 m)

EYE LOCATION	MONOCULAR DATA (ALR & ARL ARE ANGLES)			
	YL (mm)	YR (mm)	ALR (°)	ARL (°)
LEFT EYE POINT	YLL =2043	YRL =2994		14.3
RIGHT EYE POINT	YLR =2808	YRR = 2016	13.5	

CALCULATED HORIZONTAL AMBINOCULAR VIEW ANGLE (AB)

ANGLE AB = ANGLE ALR + ANGLE ARL


$ALR = \tan^{-1} [YLR / (X1 + A)]$        $ARL = \tan^{-1} [YRL / (X1 + A)]$

ANGLE AB = 27.8° (S111 REQUIREMENT = 20 degrees minimum)

TEST STATUS:	PASSED —	<b>x</b>	FAILED —	
--------------	----------	----------	----------	--

DATA SHEET NO. 3... (Continued)

INSIDE REARVIEW MIRROR FIELD OF VIEW  
TEST GRID AND MARKER SETUP

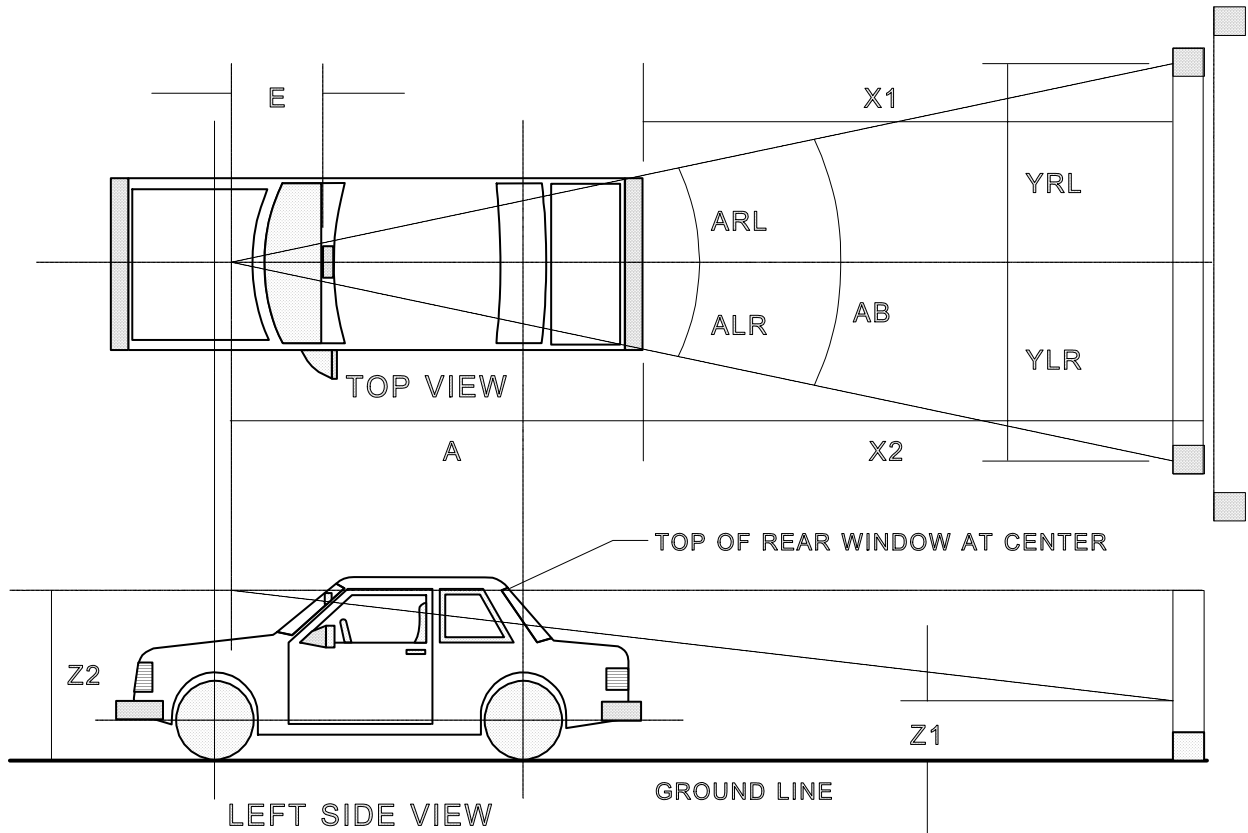



**DATA SHEET NO. 3... (Continued)**

DRIVER SIDE MIRROR (S5.2)

MIRROR OBSCURED BY UNWIPED PORTION OF WINDSHIELD YES \_\_\_\_\_ NO  X

HEIGHT OF TARGET DISC ON MIRROR  1031 mm

DISTANCE OF TARGET DISC ON MIRROR FROM VEHICLE TANGENT PLANE  12 mm

TARGET DISC LOCATION RELATIVE TO VEHICLE TANGENT PLANE  INBOARD   
(Inboard or Outboard)

ENTIRE TRIANGULAR TEST TARGET AREA ON SCREEN VISIBLE YES  X  NO \_\_\_\_\_

MIRROR PROTRUDES BEYOND VEHICLE TANGENT PLANE YES  X  NO \_\_\_\_\_

PROTRUSION REQUIRED TO MEET FIELD OF VIEW REQUIREMENT YES  X  NO \_\_\_\_\_

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

PASSENGER SIDE MIRROR (S5.3 or MFG. OPTION)

PASSENGER SIDE MIRROR TYPE (convex or unit magnification)  CONVEX

REMARKS:


**VEHICLE ATTITUDE AND GROUND LEVEL WERE RAISED 4" (101.6) TO PERFORM THE TEST.**

RECORDED BY:  JONATHAN WILLIAMS  DATE:  08/27/08


APPROVED BY:  MICHAEL L. DUNLAP  DATE:  08/27/08

DATA SHEET NO. 3... (Continued)

REQUIRED FIELD OF VIEW AS SEEN IN DRIVER'S SIDE OUTSIDE MIRROR

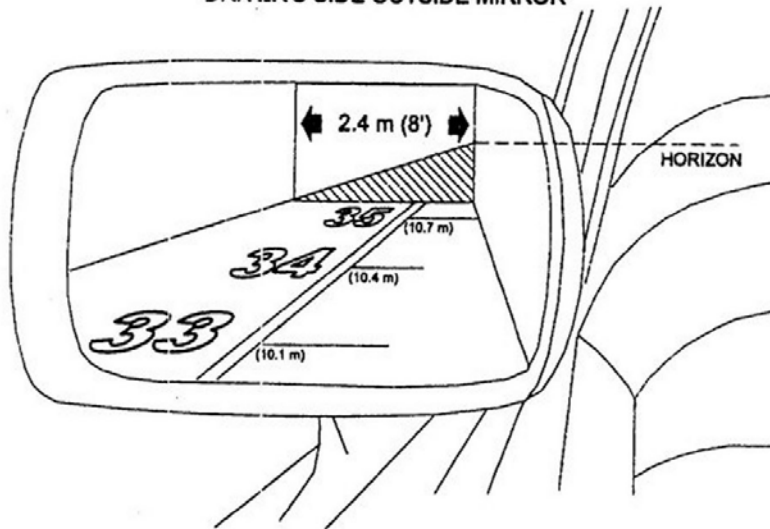


DRIVER SIDE OUTSIDE MIRROR FIELD OF VIEW TEST SETUP

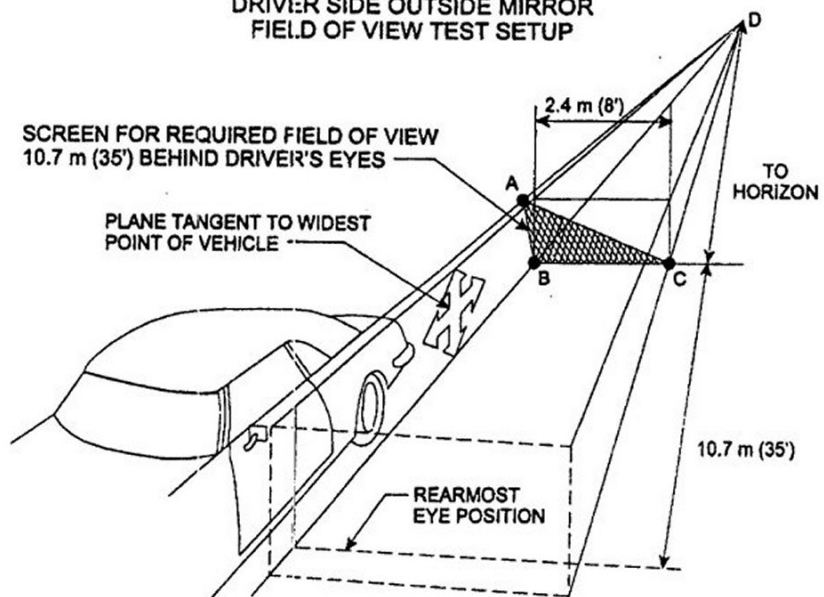


**DATA SHEET NO. 3... (Continued)**

**DRIVER SIDE OUTSIDE MIRROR TARGET DISC LOCATION WITH X AND H DIMENSIONS**

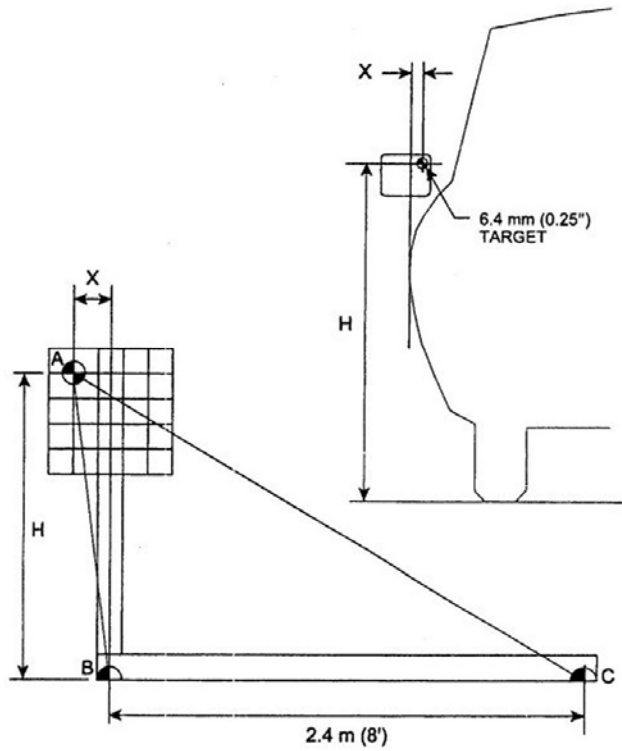

**DRIVER SIDE OUTSIDE MIRROR REQUIRED FIELD OF VIEW TRIANGLE**

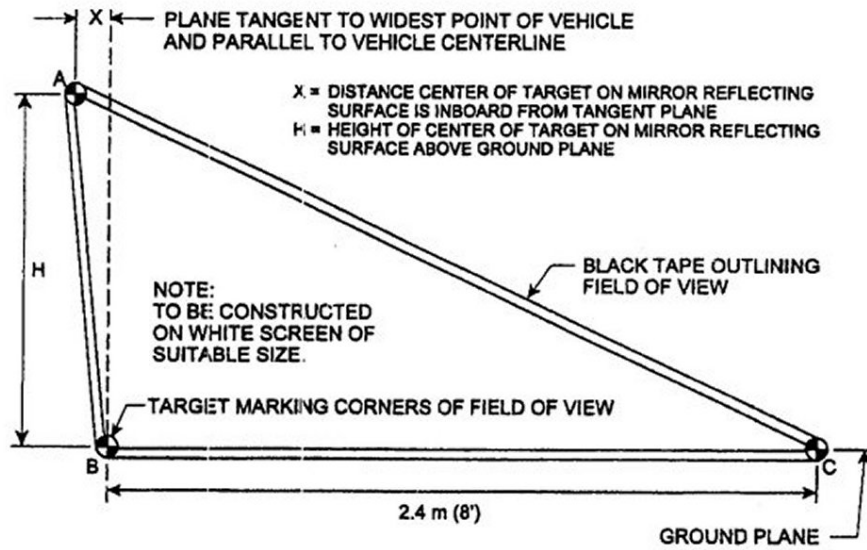

**DATA SHEET NO. 4  
REFLECTANCE TEST**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Toyota
<b>Model:</b>	Corolla LE	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95103	<b>VIN</b>	JTDBL40E29J001449
<b>Test Date:</b>	08/12/08	<b>Temperature:</b>	70°F

DESCRIPTION OF TEST APPARATUS: THE APPARATUS CONSISTS OF AN INCANDESCENT TUNGSTEN FILAMENT LAMP OPERATING AT A NOMINAL COLOR TEMPERATURE OF 2,856 K, COLLIMATING OPTICS, A SAMPLE HOLDER POSITIONED AT 25°, A SILICON PHOTOCCELL, AND A FLUKE 45 DUAL DISPLAY MULTIMETER (CALIBRATION DUE DATE 3-26-08). REFLECTANCE TESTS ARE CONDUCTED IN A 4'X6' WOODEN CABINET PAINTED FLAT BLACK. FOR CONVEX MIRROR A 6" INTEGRATING SPHERE WAS INCORPORATED INTO THE RECEIVER.

MIRROR DESCRIPTION: **INTERIOR DAY/NIGHT REARVIEW MIRROR**

VOLTAGE READING FROM CALIBRATION (Average Value): 282.0 mV

VOLTAGE READING FROM LIGHT REFLECTED BY DAY MIRROR (Average Value): 270.0 mV

REFLECTOMETER VOLTAGE READINGS		
	DAY MIRROR	NIGHT MIRROR
TEST NO. 1	<b>270 mV</b>	<b>195 mV</b>
TEST NO. 2	<b>270 mV</b>	<b>195 mV</b>
TEST NO. 3	<b>270 mV</b>	<b>195 mV</b>
TEST NO. 4	<b>270 mV</b>	<b>194 mV</b>
TEST NO. 5	<b>270 mV</b>	<b>194 mV</b>

REFLECTANCE (Day) = Voltage (Refl)/Voltage (Cal) = 0.957 x 100 = 95.7 percent  
(Min. Required = 35%)

VOLTAGE READING FROM CALIBRATION (Average Value) = 282 mV

VOLTAGE READING FROM LIGHT REFLECTED BY NIGHT MIRROR (Average Value): 194.4mV

REFLECTANCE (Night) = Voltage (Refl)/Voltage (Cal) = 0.689 x 100 = 68.9 percent  
(Min. Required = 4%)

NOTE: If meter reading directly in percent is used, record only percent

**DATA SHEET NO. 4... (Continued)**

MIRROR DESCRIPTION: **DRIVER SIDE OUTSIDE MIRROR.**

VOLTAGE READING FROM CALIBRATION (Average Value): 283.0 mV

VOLTAGE READING FROM LIGHT REFLECTED BY DAY MIRROR (Average Value): 261.0 mV

REFLECTOMETER VOLTAGE READINGS	
TEST NO. 1	<b>261 mV</b>
TEST NO. 2	<b>261 mV</b>
TEST NO. 3	<b>261 mV</b>
TEST NO. 4	<b>261 mV</b>
TEST NO. 5	<b>261 mV</b>

REFLECTANCE (Day) = Voltage (Refl)/Voltage (Cal) = 0. .922 x 100 = 92.2 percent  
(Min. Required = 35%)

NOTE: If meter reading directly in percent is used, record only percent

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

RECORDED BY: JONATHAN WILLIAMS DATE: 08/27/08

APPROVED BY: MICHAEL L. DUNLAP DATE: 08/27/08

**DATA SHEET NO. 4... (Continued)**

MIRROR DESCRIPTION: **PASSENGER SIDE OUTSIDE MIRROR.**

VOLTAGE READING FROM CALIBRATION (Average Value): 342 mV

VOLTAGE READING FROM LIGHT REFLECTED BY DAY MIRROR (Average Value): 341 mV

REFLECTOMETER VOLTAGE READINGS	
TEST NO. 1	<b>341 mV</b>
TEST NO. 2	<b>341 mV</b>
TEST NO. 3	<b>341 mV</b>
TEST NO. 4	<b>341 mV</b>
TEST NO. 5	<b>341 mV</b>

REFLECTANCE (Day) = Voltage (Refl)/Voltage (Cal) = 0. .997 x 100 = 99.7 percent

REFERANCE MIRROR VALUE 93.4 X 99.7 (reflectance value) = 93.1%  
(Min. Required = 35%)

NOTE: If meter reading directly in percent is used, record only percent

TEST STATUS:	PASSED —	<b>N/A</b>	FAILED —	
--------------	----------	------------	----------	--

**DATA SHEET NO. 5**  
**BREAKAWAY TEST - INSIDE REARVIEW MIRROR**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Toyota
<b>Model:</b>	Corolla LE	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95103	<b>VIN</b>	JTDBL40E29J001449
<b>Test Date:</b>	08/27/08	<b>Temperature:</b>	63°F

**MOUNTING OF MIRROR (INSIDE) DESCRIPTION: TAB GLUED TO WINDSHIELD. MIRROR BASE SLIPS OVER BASE AND HELD IN PLACE WITH LOCKING SCREW.**

(Requirement: the mirror shall deflect, collapse or break away when it is subjected to a force of 400 N or less)

TEST NO.	LOAD DIRECTION VERTICAL/HORIZONTAL	MAXIMUM FORCE (N)	DISPLACEMENT (MM)	PASS	FAIL
1	0-90 DEGREES	96.8	10.9	X	
2	+45/90 DEGREES	234.1	51.0	X	
3	-45/90 DEGREES	140.9	13.9	X	
4	-45/+45 DEGREES	82.0	22.0	X	
5	+45/+45 DEGREES	92.3	29.0	X	
6	+45/-45 DEGREES	82.6	21.3	X	
7	-45/-45 DEGREES	135.9	51.3	X	

REMARKS:

**DATA SHEET NO. 5... (Continued)**

**BREAKAWAY TEST - INSIDE REARVIEW MIRROR FAILURE TYPE – DESCRIPTION:**

FAILURE TYPE – DESCRIPTION:

**NONE**

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

REMARKS:

RECORDED BY: **JONATHAN WILLIAMS**

DATE: **08/27/08**

APPROVED BY: **MICHAEL L. DUNLAP**

DATE: **08/27/08**



**DATA SHEET NO. 6**  
**UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Toyota
<b>Model:</b>	Corolla LE	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95103	<b>VIN</b>	JTDBL40E29J001449
<b>Test Date:</b>	08/13/08	<b>Temperature:</b>	70°F

**DRIVER'S SIDE & INSIDE REARVIEW MIRRORS:**

DRIVER SIDE MIRROR	
TEST POSITION	DIAL READINGS
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0

INSIDE MIRROR	
TEST POSITION	DIAL READINGS
1	0
2	0
3	0
4	0
5	0
6	0
7	0
8	0
9	0
10	0

All dial indicator readings for unit magnification mirrors must be zero.

**DATA SHEET NO. 6... (Continued)**  
**UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

PASSENGER SIDE REARVIEW MIRROR:

CONVERSION TABLE FROM SPHEROMETER DIAL  
 READING TO RADIUS OF CURVATURE

TEST POSITION	DIAL READINGS (inches) Passenger	RADIUS OF CURVATURE (mm)	DEVIATION BETWEEN THE AVERAGE RADIUS OF CURVATURE AND THE TEST POSITION RADIUS OF CURVATURE (mm)	PERCENT DEVIATION FROM THE AVERAGE RADIUS OF CURVATURE
1	0.0051	<b>1374.2</b>	<b>23.8</b>	<b>1.7</b>
2	0.0051	<b>1400.1</b>	<b>2.1</b>	<b>0.2</b>
3	0.0054	<b>1323.4</b>	<b>74.6</b>	<b>5.3</b>
4	0.0048	<b>1488.4</b>	<b>90.4</b>	<b>6.5</b>
5	0.0053	<b>1348.8</b>	<b>49.2</b>	<b>3.5</b>
6	0.0049	<b>1458.6</b>	<b>60.6</b>	<b>4.3</b>
7	0.0053	<b>1348.8</b>	<b>49.2</b>	<b>3.5</b>
8	0.0048	<b>1488.4</b>	<b>90.4</b>	<b>6.5</b>
9	0.0053	<b>1348.8</b>	<b>49.5</b>	<b>3.5</b>
10	0.0051	<b>1400.1</b>	<b>2.1</b>	<b>0.2</b>
Average Radius of Curvature		<b>1398</b>	Greatest Percent Deviation	<b>6.5</b>

REMARKS:

.

**DATA SHEET NO. 6... (Continued)**  
**UNIT MAGNIFICATION AND CONVEX MIRROR TESTS**

PASSENGER'S SIDE REARVIEW MIRROR

IF CONVEX, ARE THERE ANY DISCONTINUITIES IN THE SLOPE OF THE MIRROR SURFACE YES      NO   **X**  

IF CONVEX, ARE THE WORDS, "**OBJECTS IN THE MIRROR ARE CLOSER THAN THEY APPEAR**" PRESENT YES   **X**   NO     

IF CONVEX, MEASURE LETTER HEIGHT OF WORDS     **5.0**     mm

IF CONVEX, LETTERS ARE NOT < 4.8 mm OR > 6.4 mm HIGH YES   **X**   NO     

IF CONVEX, RADIUS OF CURVATURE NOT < 889 mm OR > 1651 mm YES   **X**   NO     

IF CONVEX, THE GREATEST PERCENT DEVIATION FROM AVERAGE RADIUS OF CURVATURE IS  $\pm 12.5\%$  YES   **X**   NO     

IF UNIT MAGNIFICATION, ALL DIAL READINGS ARE ZERO  $\pm 0$ . YES   **X**   NO     

NOTE: PASSENGER MIRROR NOT REQUIRED

TEST STATUS:	PASSED —	<b>X</b>	FAILED —	
--------------	----------	----------	----------	--

RECORDED BY:   **JONATHAN WILLIAMS**   DATE:     **08/27/08**    

APPROVED BY:   **MICHAEL L. DUNLAP**   DATE:     **08/27/08**

**DATA SHEET NO. 7**  
**MIRROR REFLECTIVE SURFACE AREA TEST**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Toyota
<b>Model:</b>	Corolla LE	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95103	<b>VIN</b>	JTDBL40E29J001449
<b>Test Date:</b>	08/19/08	<b>Temperature:</b>	70°F

MPVs, TRUCKS & BUSES (OTHER THAN SCHOOL BUSES)

DATA TABLE FOR SURFACE AREA

MIRRORS	AREA (cm <sup>2</sup> )	REQUIREMENT		RESULTS	
		GVWR ≤ 4536 kg	GVWR ≥ 4536 kg	PASS	FAIL
Outside Driver's Side	187 cm <sup>2</sup>	126 cm <sup>2</sup>	323cm <sup>2</sup>	N/A	
Outside Passenger Side	183 cm <sup>2</sup>	126 cm <sup>2</sup>	323 cm <sup>2</sup>	N/A	

MIRRORS LOCATED SO AS TO PROVIDE DRIVER A VIEW TO THE REAR:

LEFT SIDE      YES   X   NO \_\_\_\_\_

RIGHT SIDE     YES   X   NO \_\_\_\_\_

TEST STATUS:	PASSED —	N/A	FAILED —	
--------------	----------	-----	----------	--

REMARKS:

RECORDED BY:   JONATHAN WILLIAMS        DATE:   08/27/08  

APPROVED BY:   MICHAEL L. DUNLAP        DATE:   08/27/08

**DATA SHEET NO. 8**  
**TEST SUMMARY-FMVSS 111-REARVIEW MIRRORS**

Vehicle Information			
<b>Year:</b>	2009	<b>Make</b>	Toyota
<b>Model:</b>	Corolla LE	<b>Body Style</b>	4-Door Sedan
<b>NHTSA No:</b>	C95103	<b>VIN</b>	JTDBL40E29J001449
<b>Test Date:</b>	08/27/08	<b>Temperature:</b>	N/A

PASSENGER VEHICLE TESTING:

OUTSIDE DRIVER SIDE MIRROR	PASS	FAIL	COMMENTS
STABLE SUPPORT	X		
DOES NOT PROTRUDE BEYOND VEHICLE BODY	X		
NOT OBSCURED BY UNWIPED PORTION OF WINDSHIELD	X		
ADJUSTABLE BY TILTING	X		
ADJUSTABLE FROM DRIVER SEAT	X		
FREE OF SHARP EDGES	X		
FIELD-OF-VIEW	X		
REFLECTANCE	X		
UNIT MAGNIFICATION	X		

INSIDE REARVIEW MIRROR	PASS	FAIL	COMMENTS
STABLE SUPPORT	X		
ADJUSTABLE BY TILTING	X		
FIELD-OF-VIEW	X		
REFLECTANCE	X		
BREAK AWAY	X		
UNIT MAGNIFICATION	X		

OUTSIDE PASSENGER MIRROR*	PASS	FAIL	COMMENTS
STABLE SUPPORT	X		
ADJUSTABLE BY TILTING	X		
FREE OF SHARP EDGES	X		
UNIT OR CONVEX			Convex
LABELING	X		
REFLECTANCE	X		

\* MIRROR NOT REQUIRED

APPENDIX A  
PHOTOGRAPHS



2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 1: LEFT FRONT  $\frac{3}{4}$  VIEW





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 2: LEFT SIDE VIEW





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 3: RIGHT REAR ¾ VIEW






2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 4: RIGHT SIDE VIEW



MFD. BY: TOYOTA MOTOR CORPORATION 01/08  
 GVWR 3840LB GAWR FR 2090LB RR 1850LB  
 THIS VEHICLE CONFORMS TO ALL APPLICABLE  
 FEDERAL MOTOR VEHICLE SAFETY, BUMPER, AND  
 THEFT PREVENTION STANDARDS IN EFFECT ON  
 THE DATE OF MANUFACTURE SHOWN ABOVE.  
 JTDBL40E29J001449 PASS. CAR

C/TR: 779/FB16 ZRE142L-AEPDKA  
 A/TM: -05A/U341E MADE IN JAPAN 796 A

2009 TOYOTA COROLLA LE  
 NHTSA NO. C95103  
 FMVSS NO. 111

FIGURE 5: MANUFACTURER'S LABEL





**TIRE AND LOADING INFORMATION**

SEATING CAPACITY: TOTAL 5  
FRONT 2: REAR 3

The combined weight of occupants  
and cargo should never exceed 370 kg or 825 lbs.

**INFORMATION SUR LES PNEUS ET LE CHARGEMENT**

NOMBRE DE PLACES ASSISES : TOTAL 5  
AVANT 2: ARRIÈRE 3

Le poids total des occupants et du chargement ne  
doit jamais être supérieur à 370 kg ou 825 lb.

TIRE	SIZE	COLD TIRE PRESSURE
FRONT	P195/65R15	210kPa, 30PSI
REAR	P195/65R15	210kPa, 30PSI
SPARE	T135/70R16	420kPa, 60PSI

PNEUS	DIMENSION	PRESSION DE GONFLAGE À FROID
AVANT	P195/65R15	210kPa, 30PSI
ARRIÈRE	P195/65R15	210kPa, 30PSI
SECOURS	T135/70R16	420kPa, 60PSI

**SEE OWNER'S MANUAL FOR  
ADDITIONAL INFORMATION**

**POUR DE PLUS AMPLES INFORMATIONS,  
VOIR LE MANUEL DU PROPRIÉTAIRE**

12E91  
**F 1**

2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 6:TIRE PLACARD





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 7: DRIVER SIDE REARVIEW MIRROR AND MOUNTING





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 8: PASSENGER SIDE REARVIEW MIRROR AND MOUNTING



2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 9: INSIDE REARVIEW MIRROR AND MOUNTING





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 10:TEST SET-UP





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 11:CAMERA SET-UP FOR PHOTOGRAPHING REFERENCE BOARD



A-12

111-KAR-08-005



2009 TOYOTA COROLLA LE FIGURE 12: OVERALL SET-UP AND INSTRUMENTATION FOR MIRROR BREAK- AWAY TEST  
NHTSA NO. C95103  
FMVSS NO. 111





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 13:CLOSE-UP OF MIRROR BREAK- AWAY TEST





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111


FIGURE 14: REFLECTION TEST SET-UP





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 15: MIRROR SET-UP FOR AREA MEASUREMENT

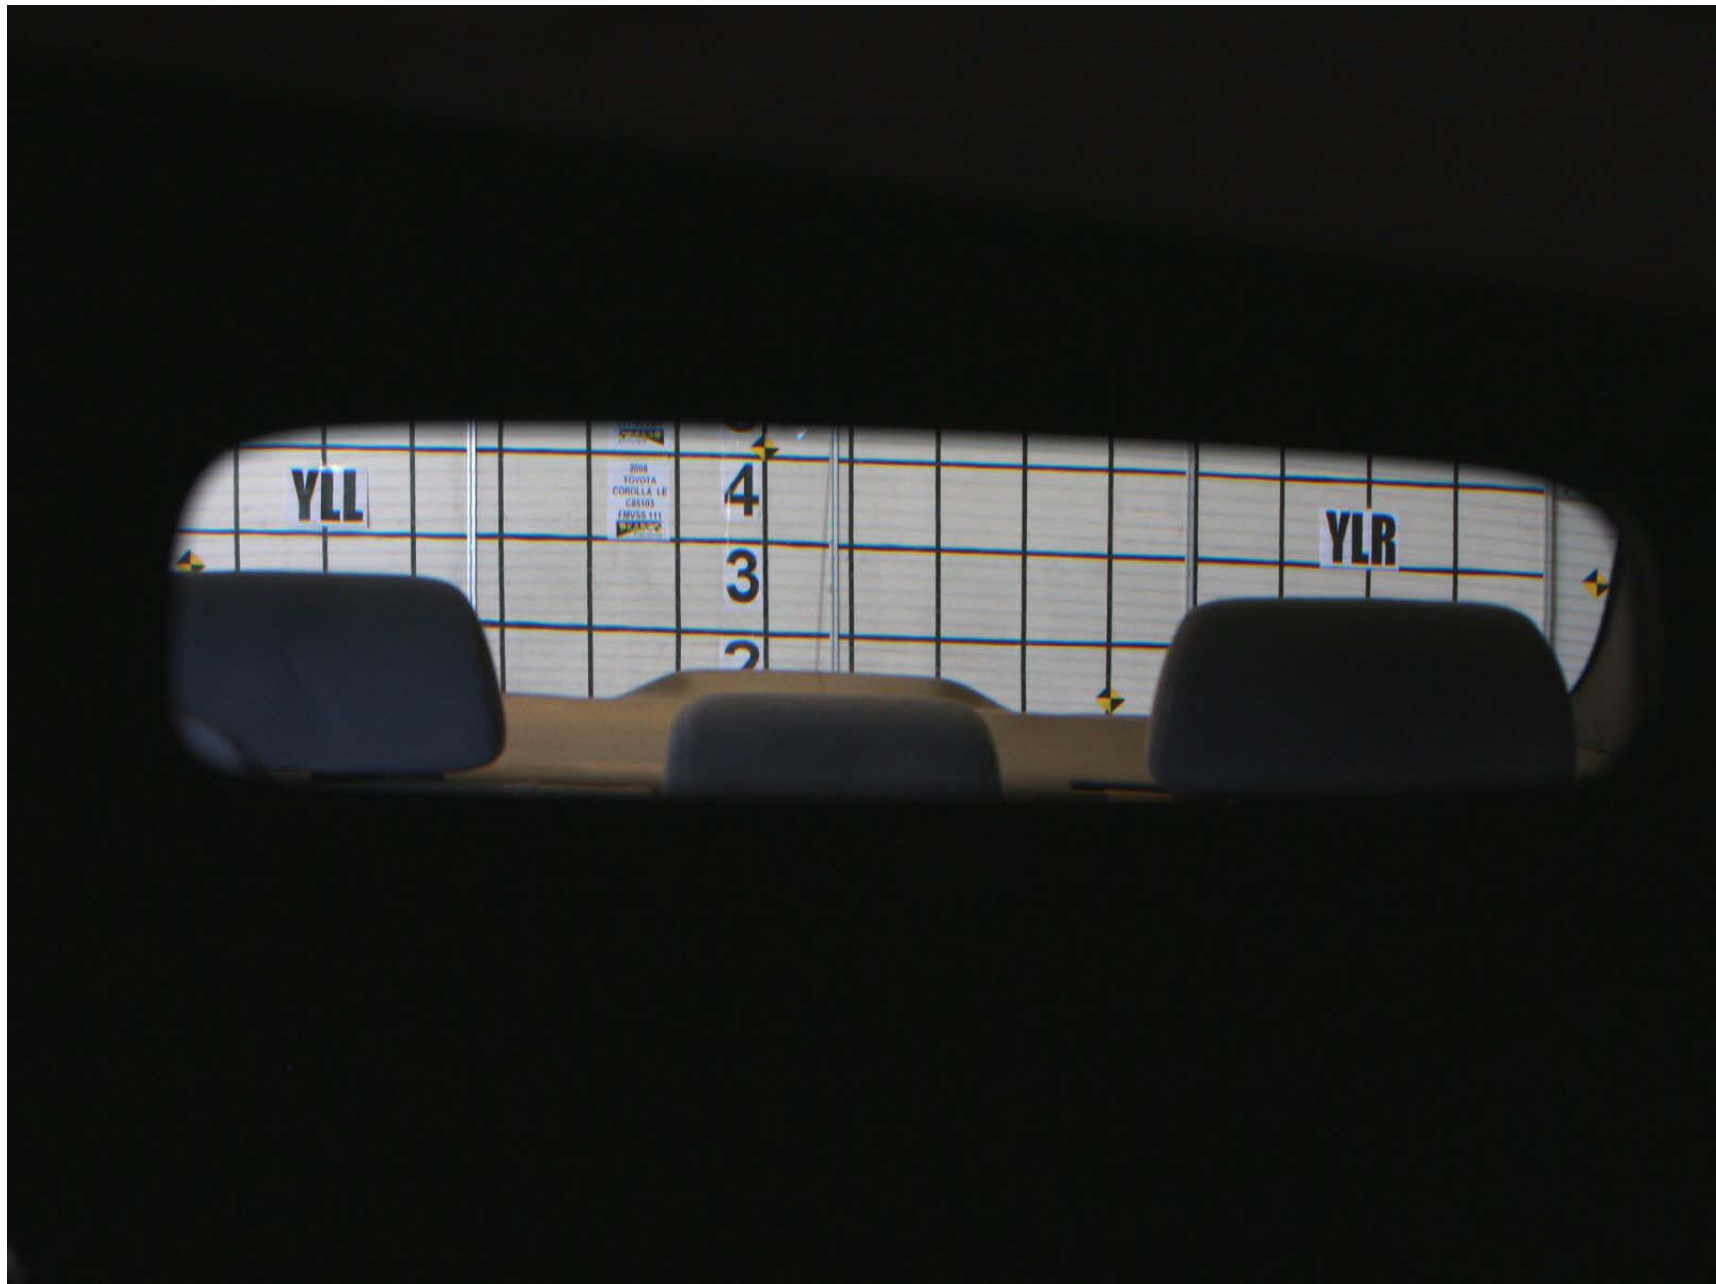

2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 16:LEFT EYE FIELD OF VIEW TEST (INSIDE MIRROR)





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 17:REFERENCE BOARD FOR INSIDE MIRROR, LEFT EYE



2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 18:RIGHT EYE FIELD OF VIEW TEST (INSIDE MIRROR)





2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 19:REFERENCE BOARD FOR INSIDE MIRROR, RIGHT EYE



2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111


FIGURE 20:LEFT EYE FIELD OF VIEW TEST (DRIVER SIDE MIRROR)



2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111

FIGURE 21:RIGHT EYE FIELD OF VIEW TEST (DRIVER SIDE MIRROR)




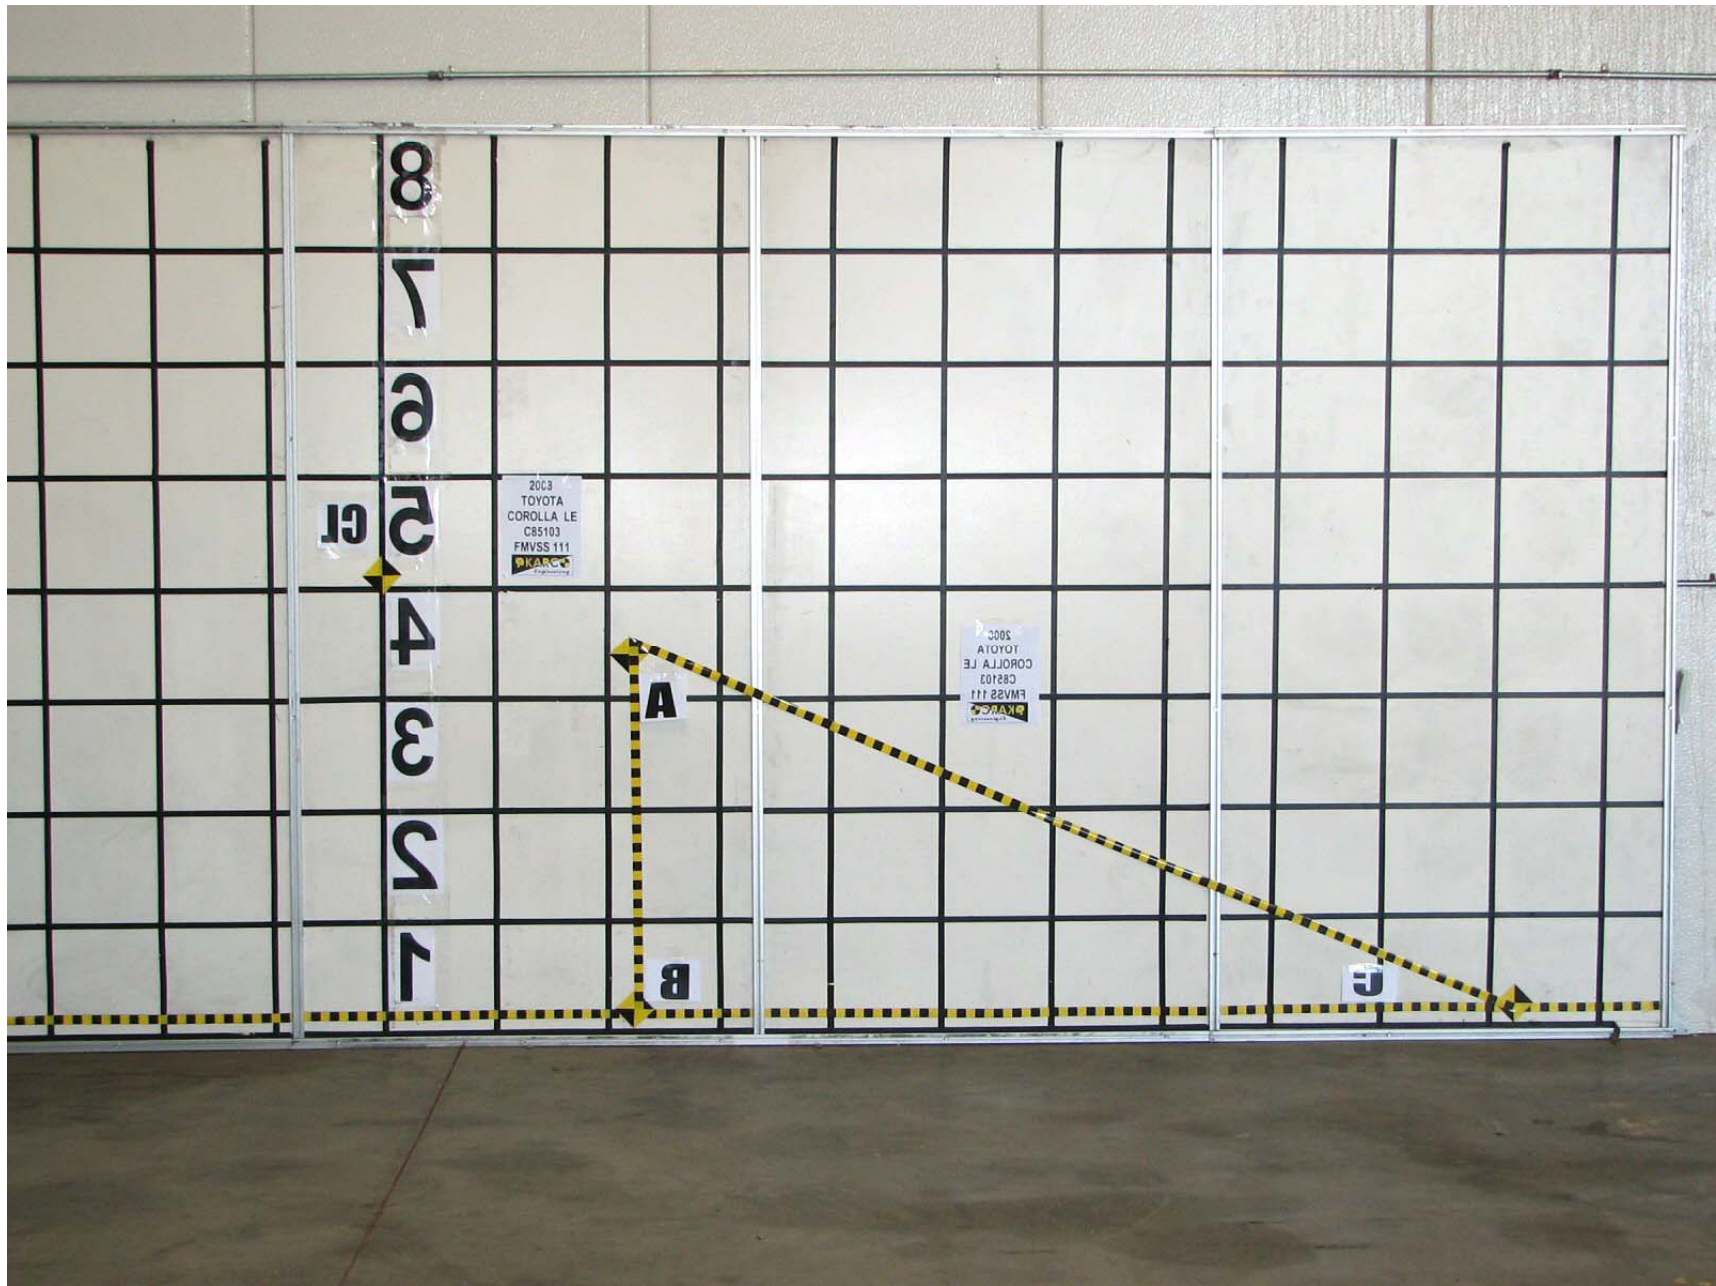

2009 TOYOTA COROLLA LE  
NHTSA NO. C95103  
FMVSS NO. 111


FIGURE 22:REFERENCE BOARD FOR DRIVER SIDE MIRROR

APPENDIX B  
DATA PLOTS

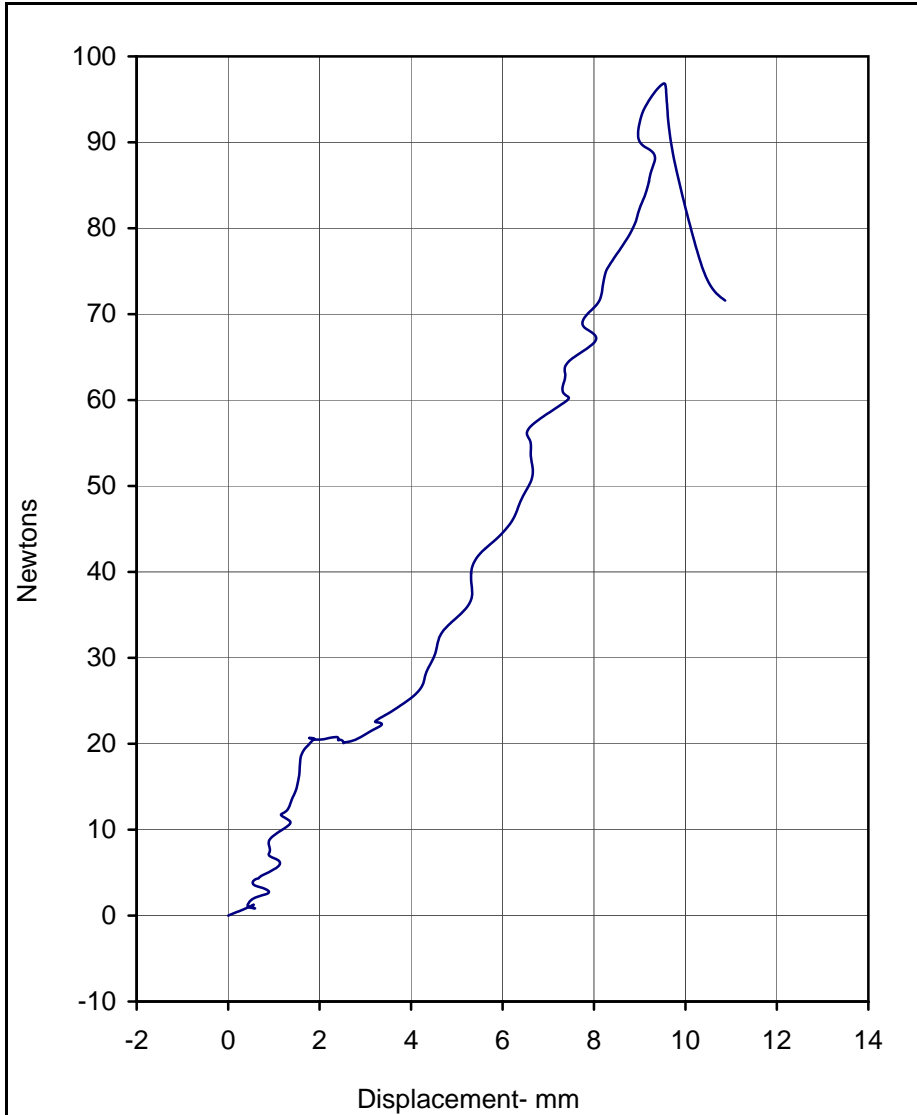

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	96.8	9.5	1

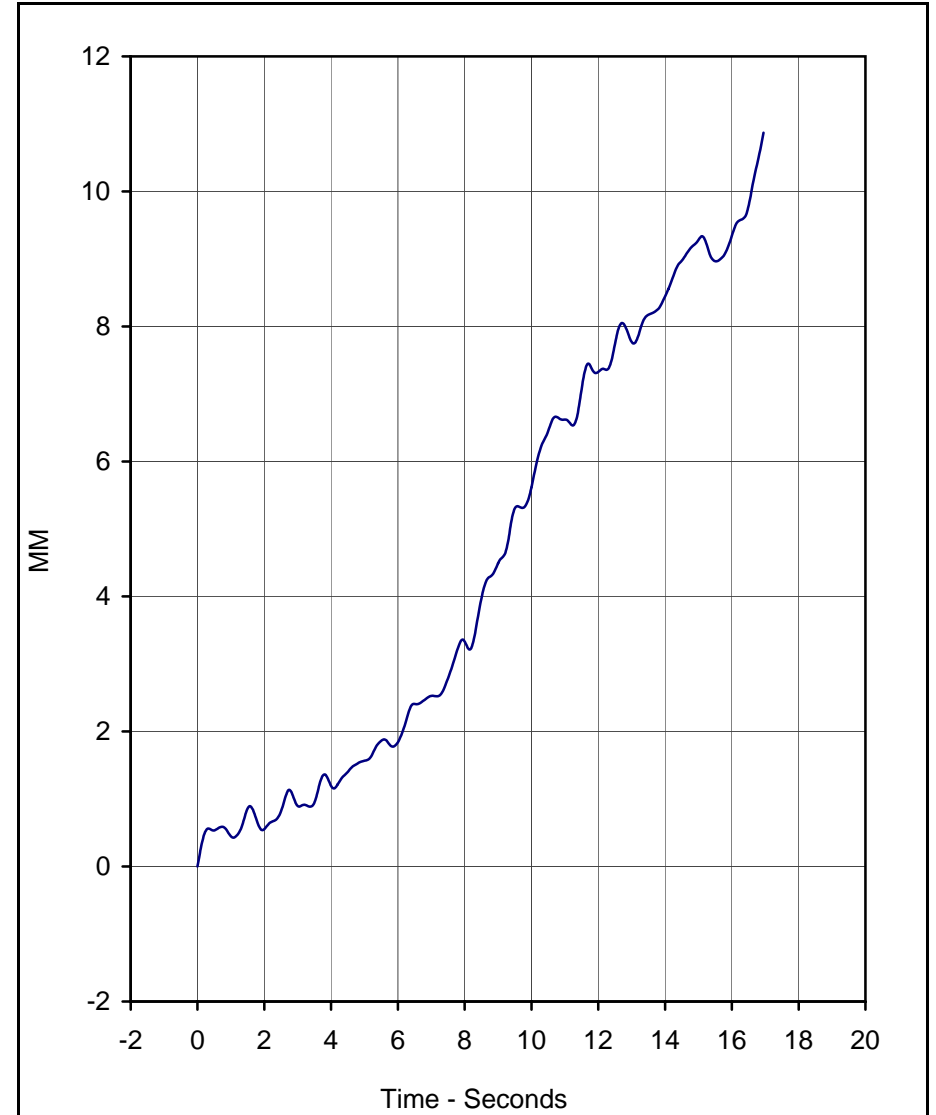



Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	10.9	17.0	36.3	1

Test Program: 2008 FMVSS 111 Rearview Mirrors Test No.: 1  
 Test Vehicle: 2009 Toyota Corolla No.: C95103

Load Direction: 0 / 90  
 Test Date: 8/27/08



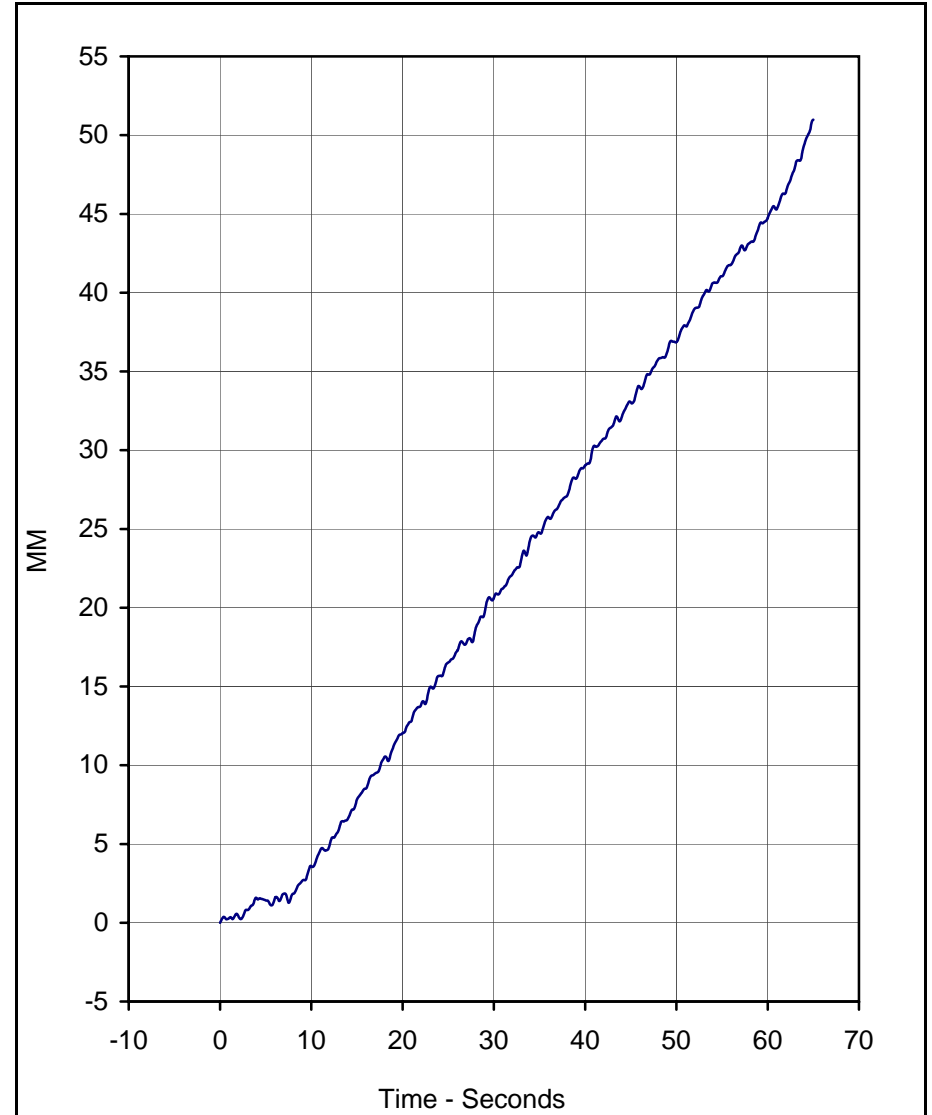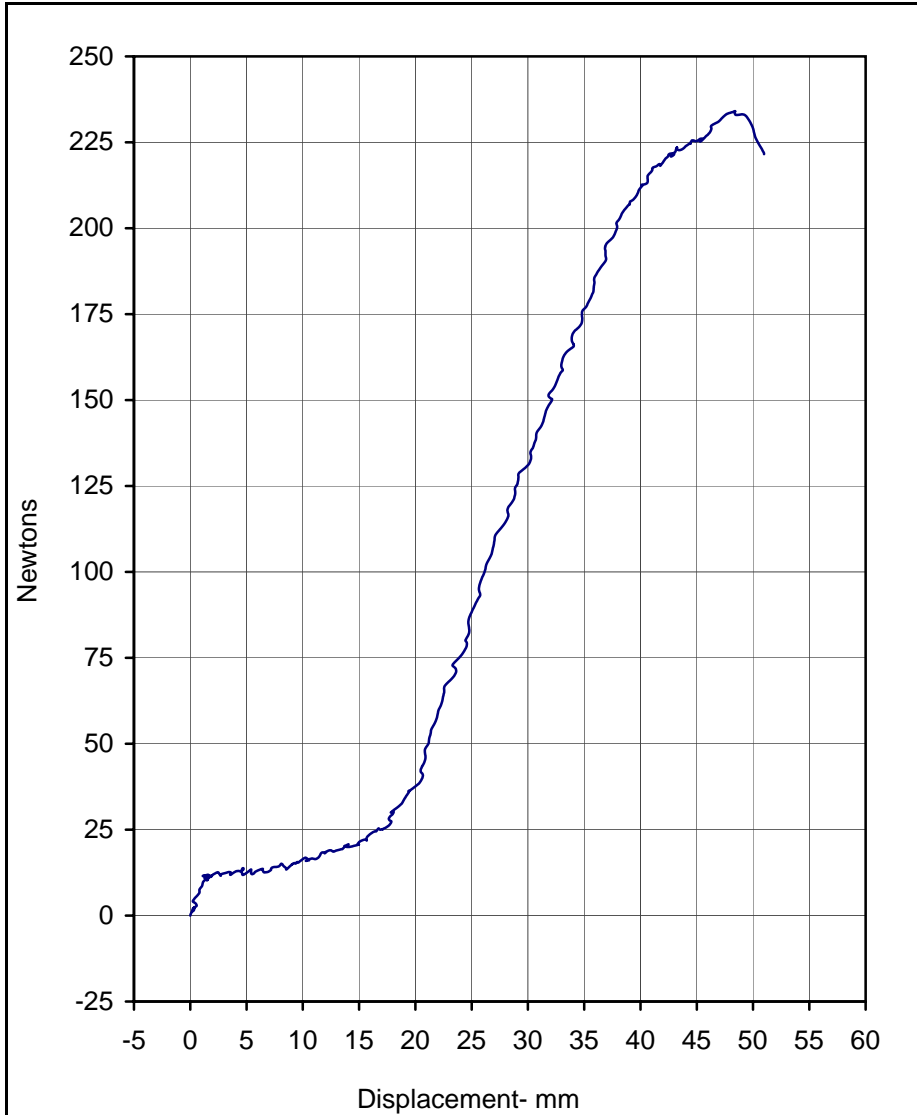

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL


Units	Peak Force	Displacement	Filter (Hz)
Newtons	234.1	48.4	1

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	51.0	65.0	46.6	1

Test Program: 2008 FMVSS 111 Rearview Mirrors Test No.: 2  
 Test Vehicle: 2009 Toyota Corolla No.: C95103


Load Direction: +45 / 90  
 Test Date: 8/25/08



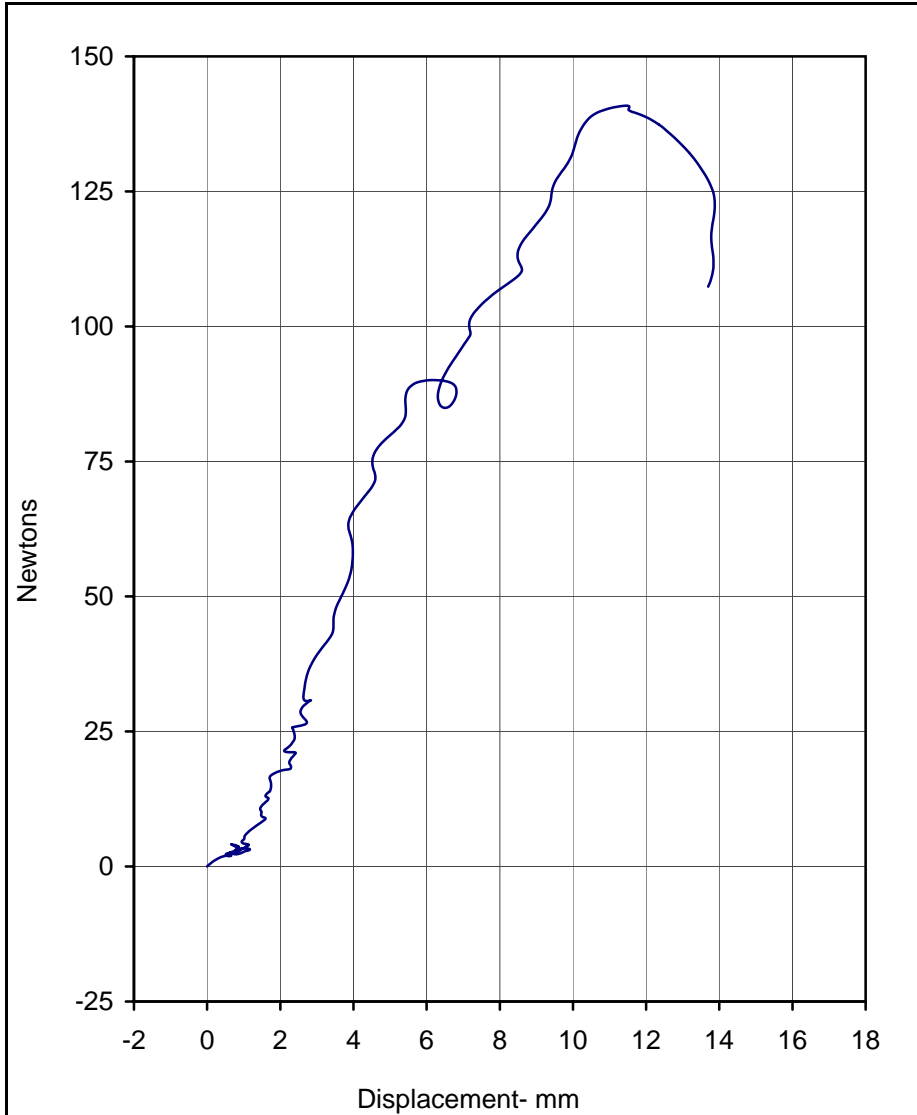

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	140.9	11.4	1

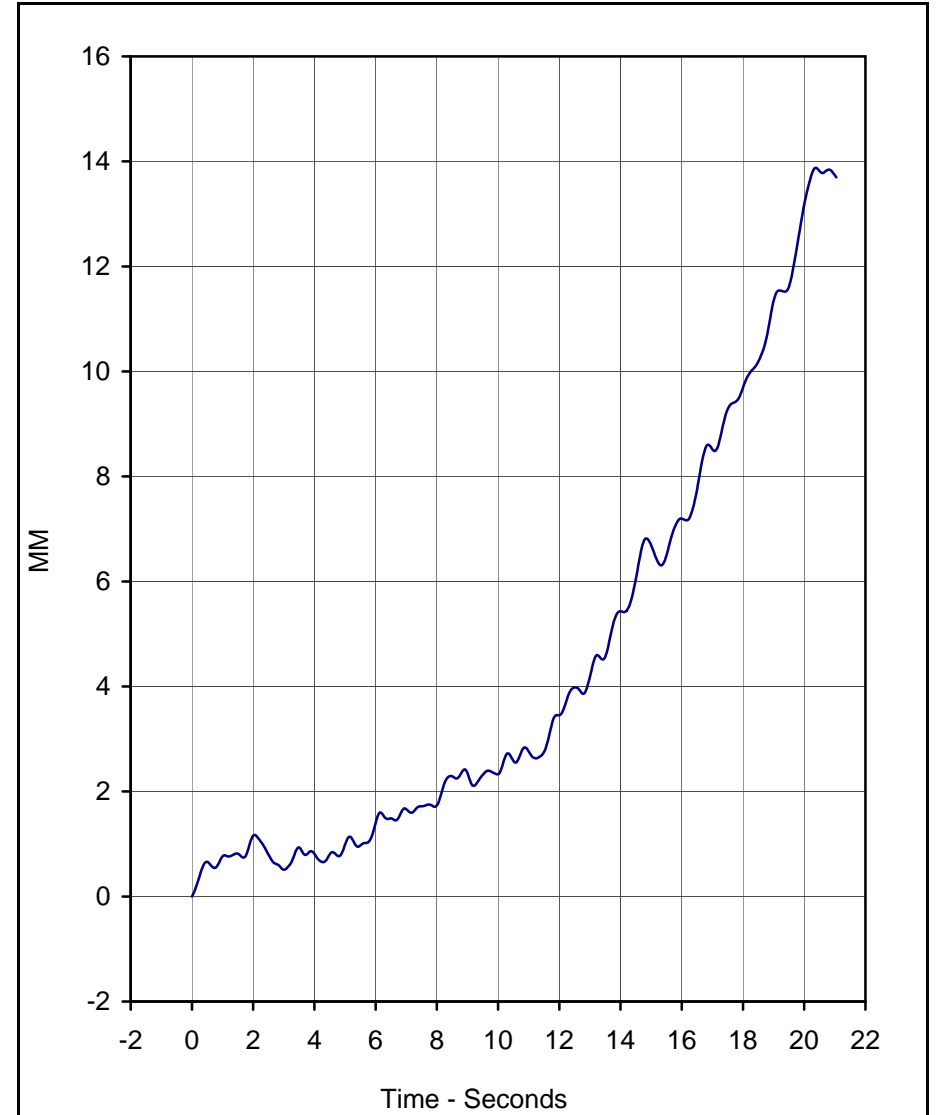

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL


Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	13.9	20.4	36.6	1

Test Program: 2008 FMVSS 111 Rearview Mirrors Test No.: 3  
 Test Vehicle: 2009 Toyota Corolla No.: C95103

Load Direction: -45 / 90  
 Test Date: 8/25/08






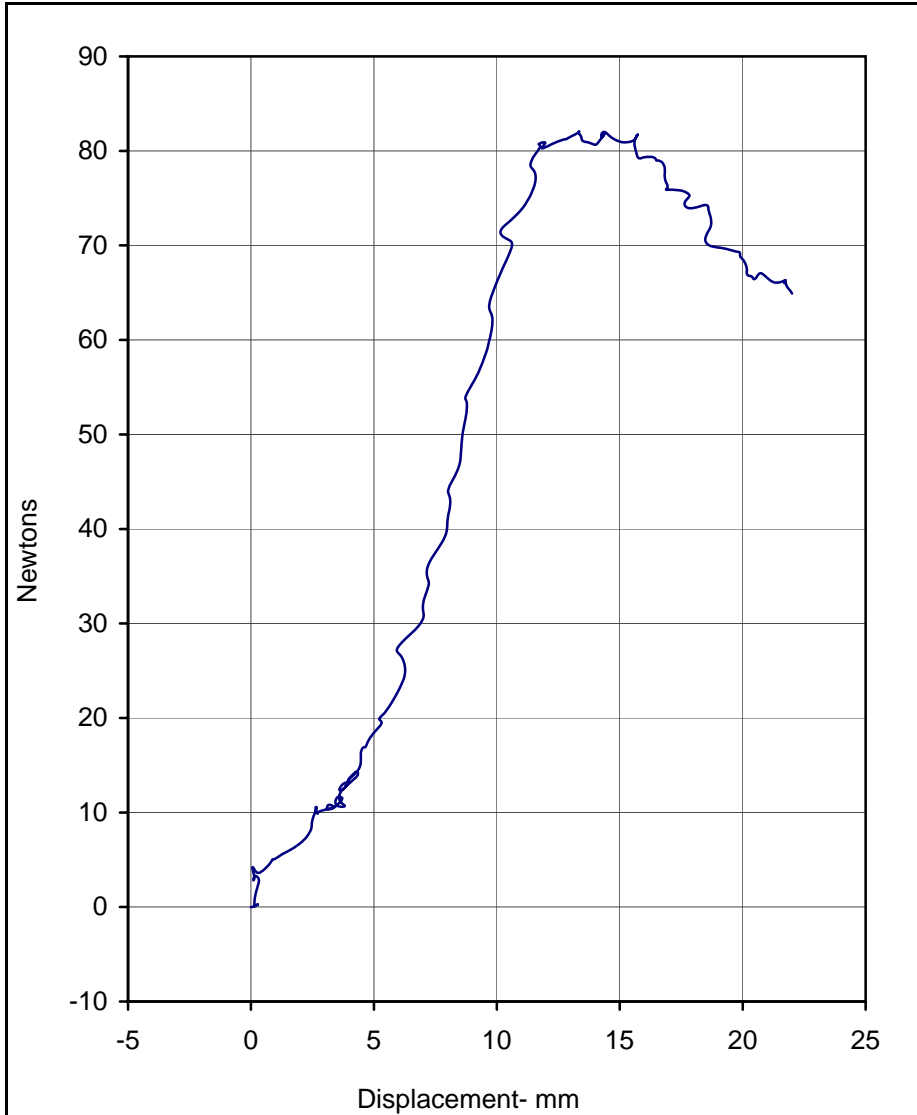

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	82.0	13.3	1

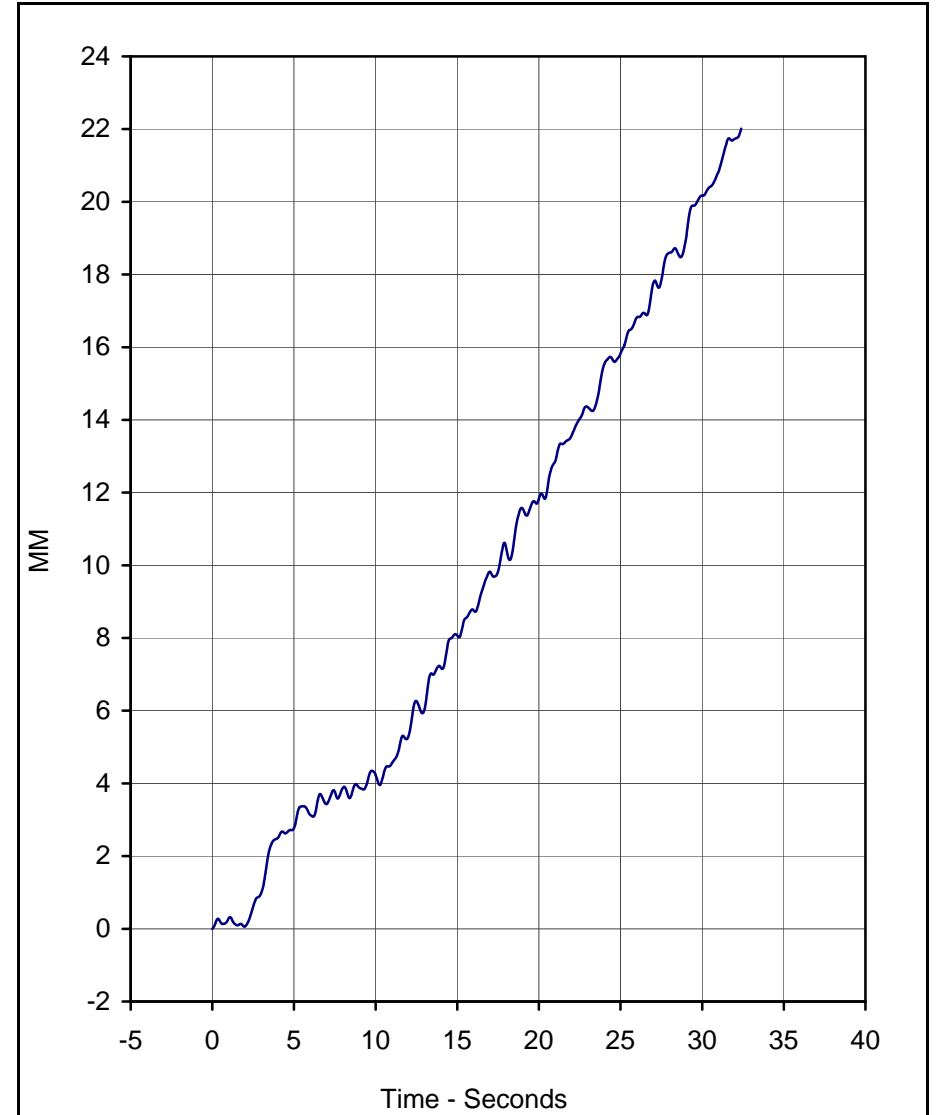


Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	22.0	32.4	40.8	1

Test Program: 2008 FMVSS 111 Rearview Mirrors Test No.: 4  
 Test Vehicle: 2009 Toyota Corolla No.: C95103


Load Direction: -45 / +45  
 Test Date: 8/27/08



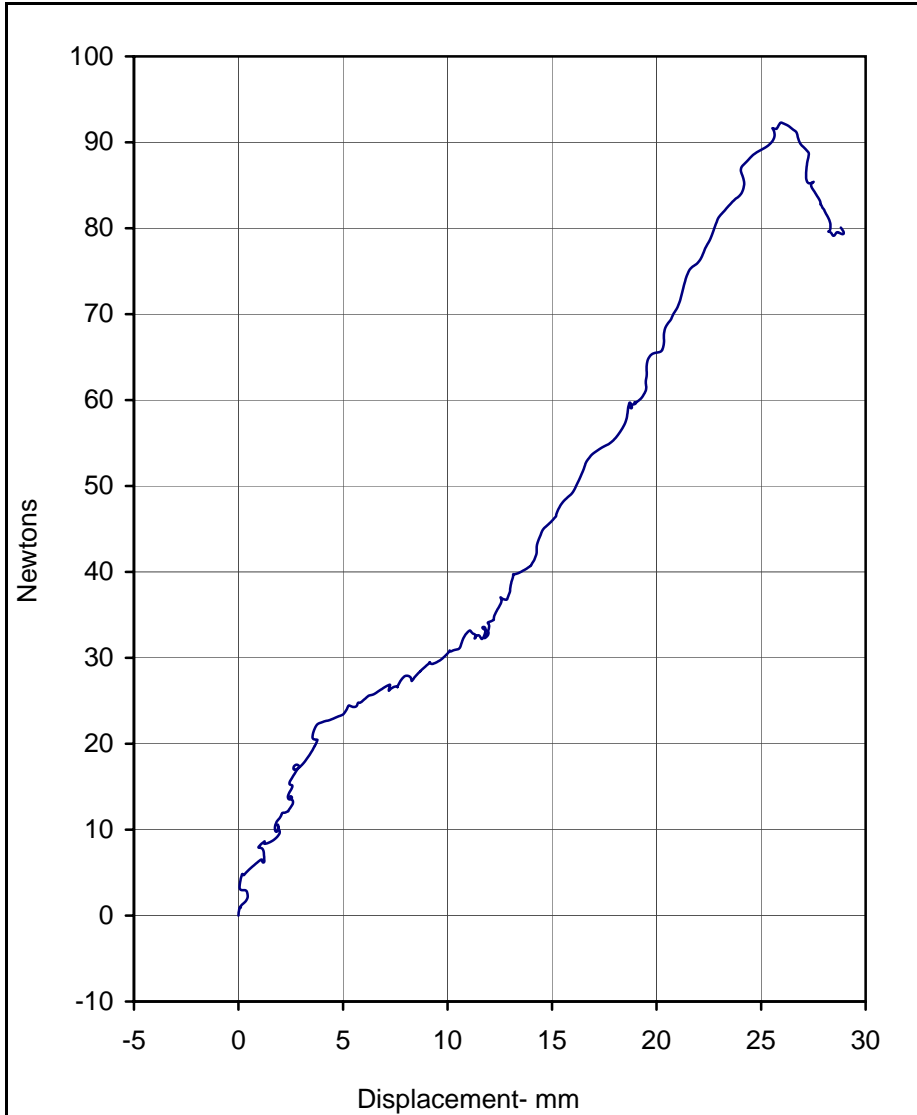

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	92.3	26.0	1

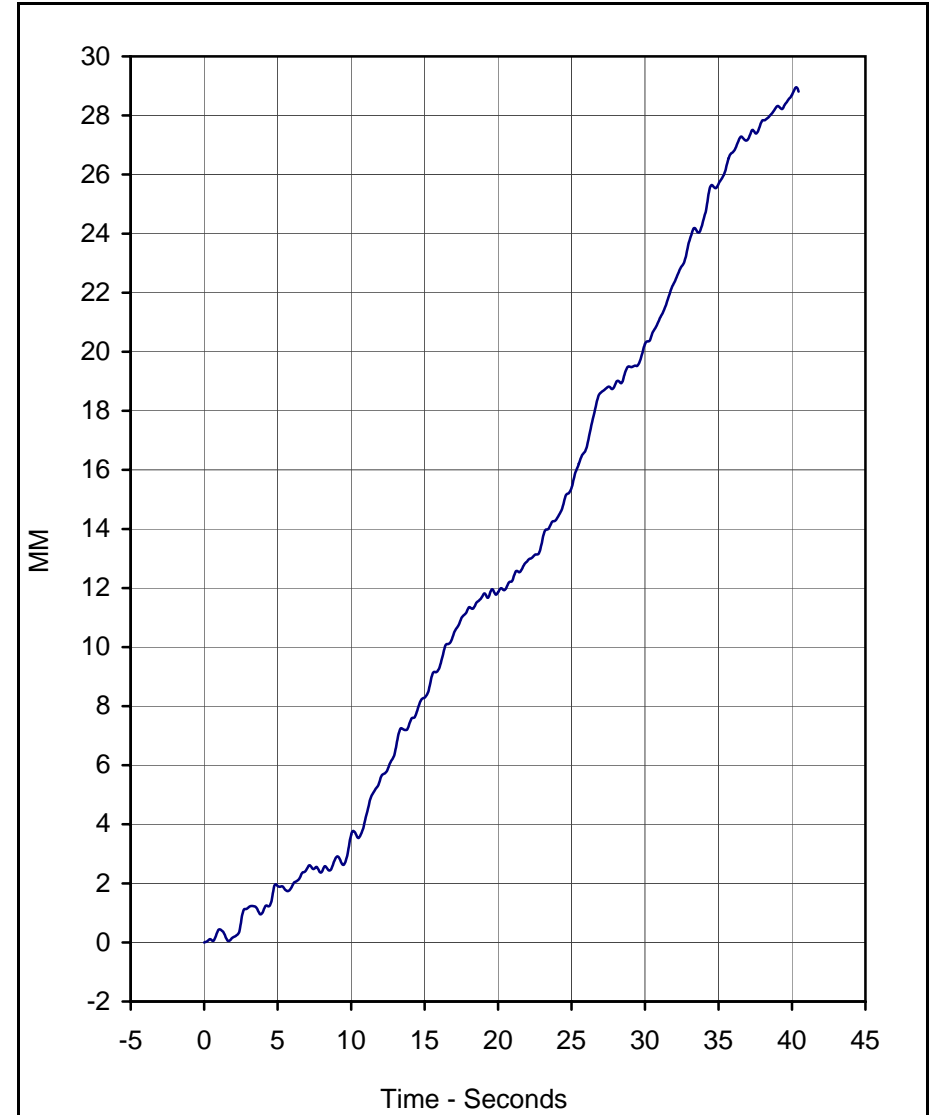


Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	29.0	40.3	43.6	1

Test Program: 2008 FMVSS 111 Rearview Mirrors Test No.: 5  
 Test Vehicle: 2009 Toyota Corolla No.: C95103


Load Direction: +45 / +45  
 Test Date: 8/27/08



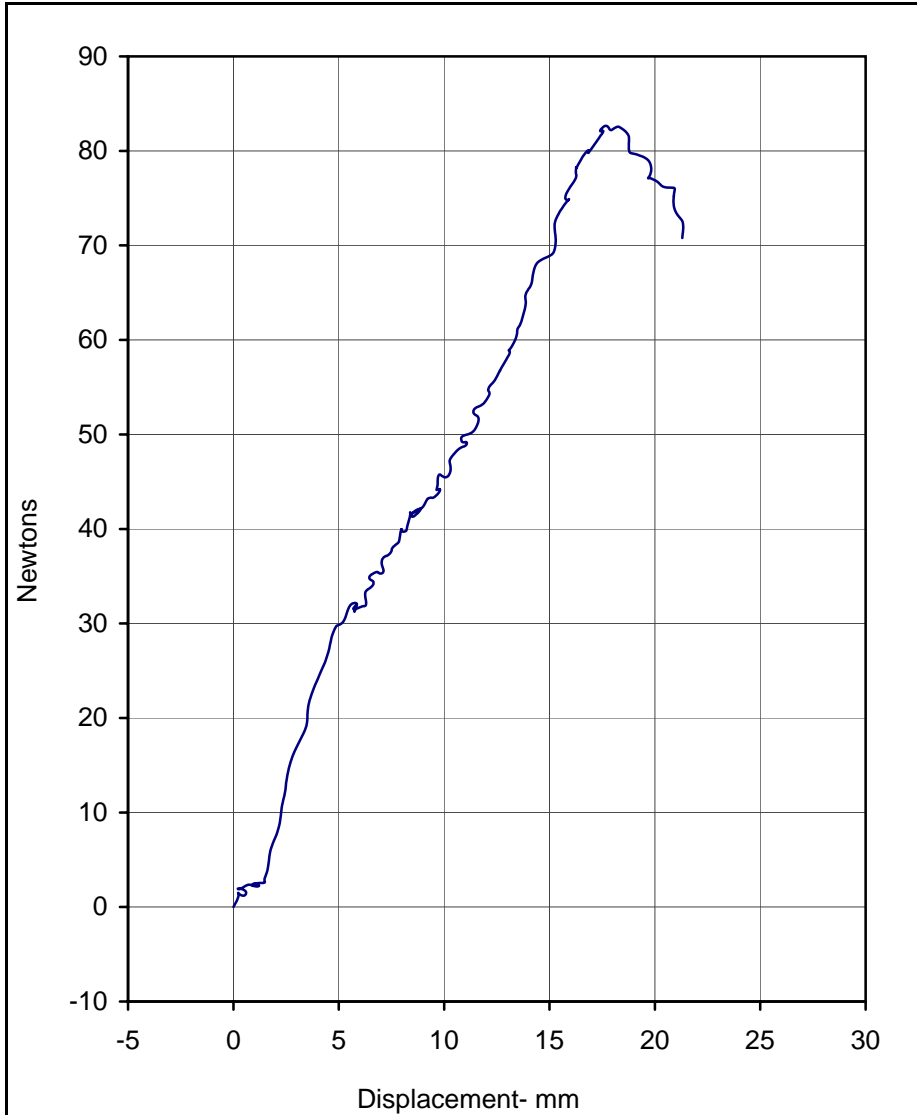

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	82.6	17.7	1

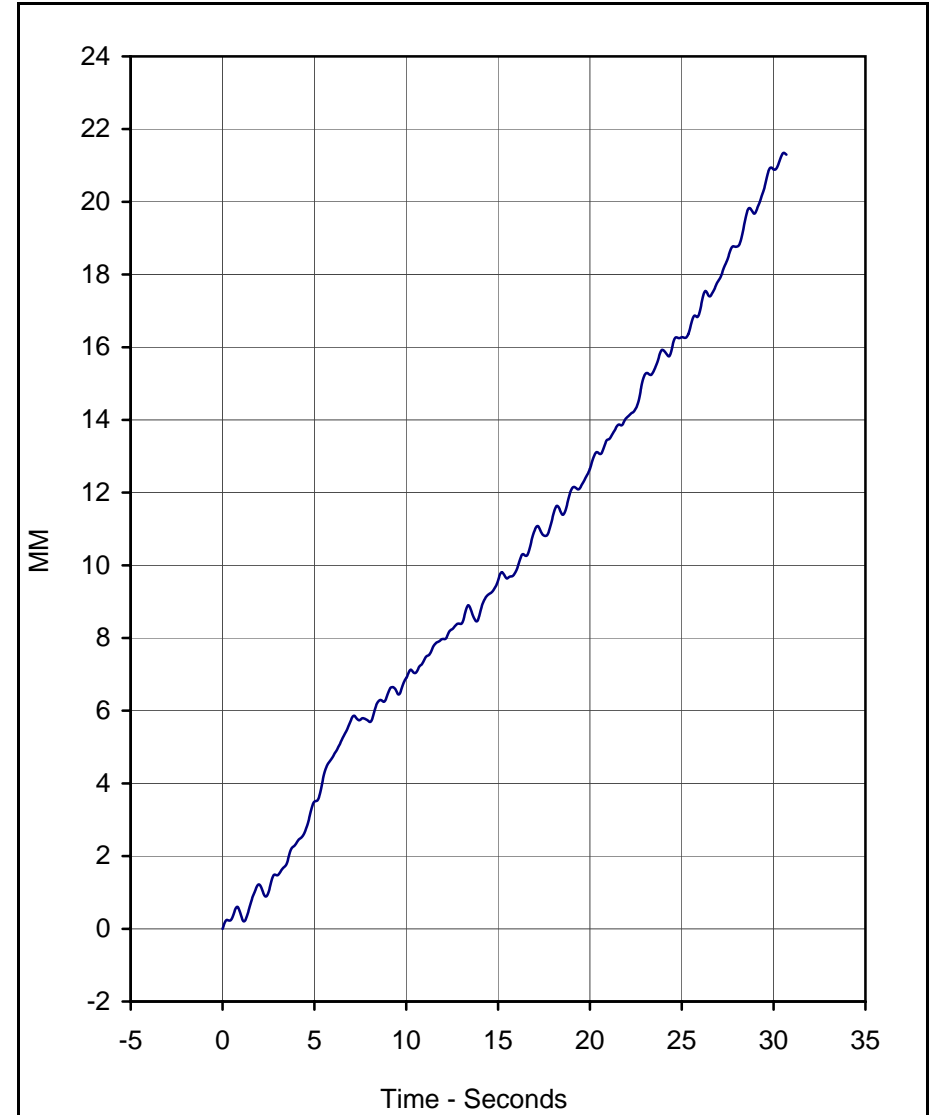



Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	21.3	30.6	41.1	1

Test Program: 2008 FMVSS 111 Rearview Mirrors Test No.: 6  
 Test Vehicle: 2009 Toyota Corolla No.: C95103

Load Direction: +45 / -45  
 Test Date: 8/27/08



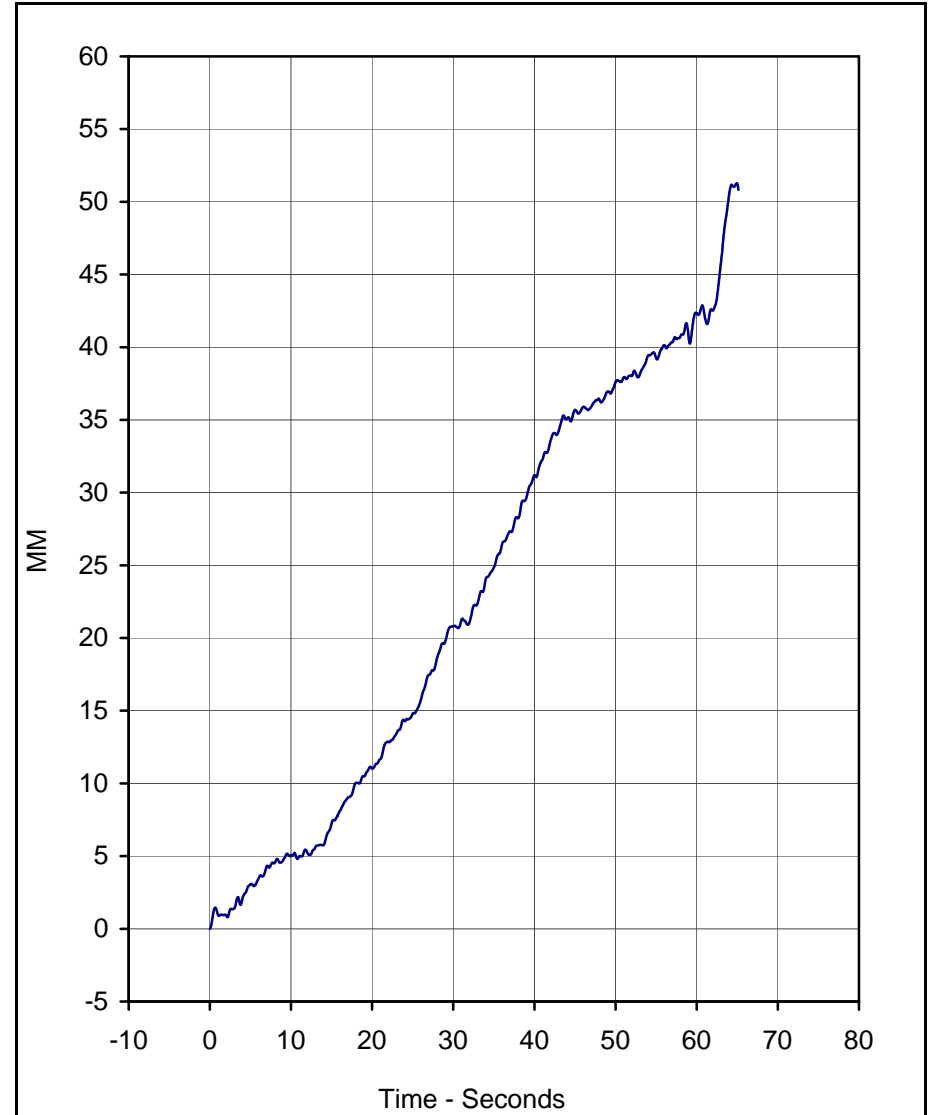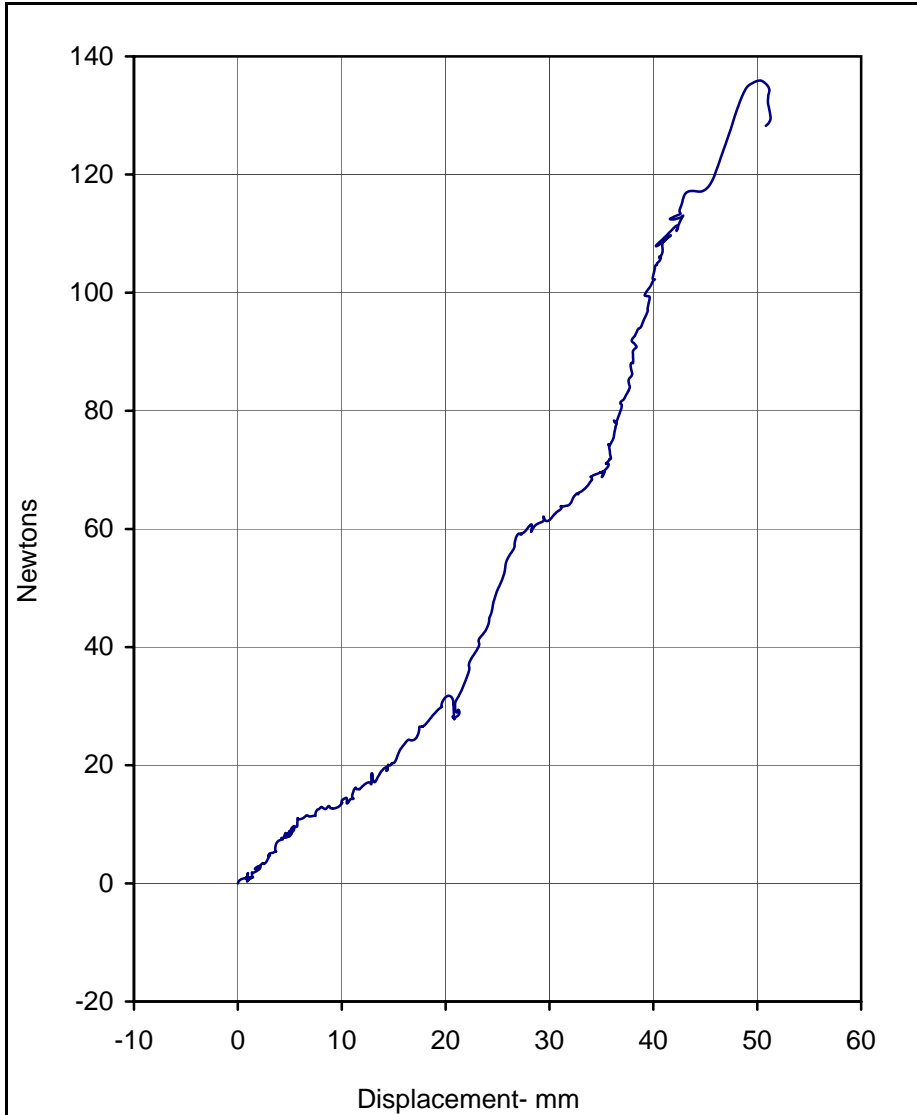

Curve Description	CURNO	Type
Force vs. Displacement	001	FIL

Curve Description	CURNO	Type
Displacement vs. Time	002	FIL

Units	Peak Force	Displacement	Filter (Hz)
Newtons	135.9	50.3	1

Units	Max	Time	Displ. Rate (mm/min.)	Filter (Hz)
MM	51.3	65.0	47.0	1

Test Program: 2008 FMVSS 111 Rearview Mirrors Test No.: 7  
 Test Vehicle: 2009 Toyota Corolla No.: C95103

Load Direction: -45 / -45  
 Test Date: 8/27/08



APPENDIX C

TEST EQUIPMENT LIST AND CALIBRATION INFORMATION

**2008 FMVSS 111 Rearview Mirrors**  
**Test Equipment List**  
**8/25/08**  
**2009 Toyota Corolla**

Description	Manufacturer	Model No.	Serial No.	Limit	Accuracy	Cal. Date	Due Cal.
Hydraulic Pump	Lincoln	T-3825-C	2460952	8 gpm @ 2700 psi	N/A	N/A	N/A
Computer	Panasonic	CF-71	8IMAA01852	N/A	N/A	N/A	N/A
TDAS	DTS	TDAS	DM0103	N/A	SAE J211	11/28/07	11/27/08
Load Cell	Lebow	3167	1573	667 N	± 1.0%	6/20/08	6/20/09
Displacement Xdcr.	Celesco	PTX101-0030	J0654652	76 CM	± 1.0%	7/1/08	7/1/09



APPENDIX D  
EYELIPSE LOCATIONS SUPPLIED BY MANUFACTURER

## VEHICLE INFORMATION / TEST SPECIFICATIONS

FMVSS No. 111

Vehicle Make/Model/Year: Toyota Corolla 2009

Driver's Eye Reference Points:

Coordinate System:

X = Longitudinal Dimension

Y = Lateral Dimension

Z = Vertical Dimension

Positive Values are as follows:


X = Forward of Reference Point

Y = Outboard of Reference Point (to driver's side)

Z = Above Reference Point

Provide Reference/Body Fiducial Point that dimensions below are measured from.  
**Point must be easily accessible and usable by test laboratory personnel, i.e. seat track mounting bolt, seat belt anchorage bolt, door latch at B pillar striker.** (Provide sketch of reference point if necessary.)

Reference Point: Upper tightening hole of B pillar striker on driver side.

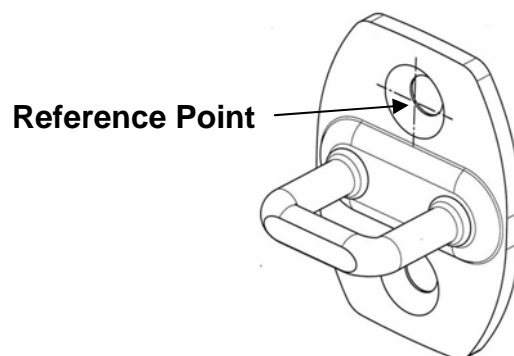



**Prism type mirror (NUMMI)**

COORDINATES	LEFT SIDE MIRROR		INSIDE MIRROR		RIGHT SIDE MIRROR	
	LE1 (left eye)	RE1 (right eye)	LE2	RE2	LE3	RE3
X	99.6	114.0	113.7	91.1	126.4	90.6
Y	391.3	454.7	405.7	466.7	416.5	470.8
Z	406.8	406.7	406.8	407.0	404.9	405.2
Mirror Mfr.,	MAGNA DONNELLY					
Model	MIRROR ASSY OUTER RR VIEW, LH		MIRROR ASSY INNER RR VIEW		MIRROR ASSY OUTER RR VIEW, RH	
Part No.	87940-02870 87940-02A80 87940-02B30 87940-02B40		87810-06080		87910-02890 87910-02B00 87910-02B40 87910-02B50	

**EC type mirror (NUMMI)**

COORDINATES	LEFT SIDE MIRROR		INSIDE MIRROR		RIGHT SIDE MIRROR	
	LE1 (left eye)	RE1 (right eye)	LE2	RE2	LE3	RE3
<b>X</b>	99.6	114.0	113.4	92.3	126.4	90.6
<b>Y</b>	391.3	454.7	403.7	465.2	416.5	470.8
<b>Z</b>	406.8	406.7	406.9	407.0	404.9	405.2
Mirror Mfr.,	MAGNA DONNELLY		GENTEX		MAGNA DONNELLY	
Model	MIRROR ASSY OUTER RR VIEW, LH		MIRROR ASSY INNER RR VIEW		MIRROR ASSY OUTER RR VIEW, RH	
Part No.	87940-02870 87940-02A80 87940-02B30 87940-02B40		87810-02130		87910-02890 87910-02B00 87910-02B40 87910-02B50	

**Prism type mirror (TMC)**

COORDINATES	LEFT SIDE MIRROR		INSIDE MIRROR		RIGHT SIDE MIRROR	
	LE1 (left eye)	RE1 (right eye)	LE2	RE2	LE3	RE3
X	99.4	113.0	113.9	91.0	126.3	90.3
Y	390.9	454.2	406.0	466.9	416.9	471.0
Z	406.9	406.8	406.8	407.0	404.9	405.2
Mirror Mfr.,	MURAKAMI CORP.					
Model	MIRROR ASSY OUTER RR VIEW, LH		MIRROR ASSY INNER RR VIEW		MIRROR ASSY OUTER RR VIEW, RH	
Part No.	87940-12C60 87940-12D80		87810-60191		87910-12C40 87910-12D60	