


REPORT NUMBER: 301-MGA-2011-002

**SAFETY COMPLIANCE TESTING FOR FMVSS 301R
FUEL SYSTEM INTEGRITY – REAR IMPACT**

**VOLKSWAGEN DE MEXICO
2011 VOLKSWAGEN JETTA
NHTSA NUMBER: CB5801**

**PREPARED BY:
MGA RESEARCH CORPORATION
5000 WARREN ROAD
BURLINGTON, WI 53105**

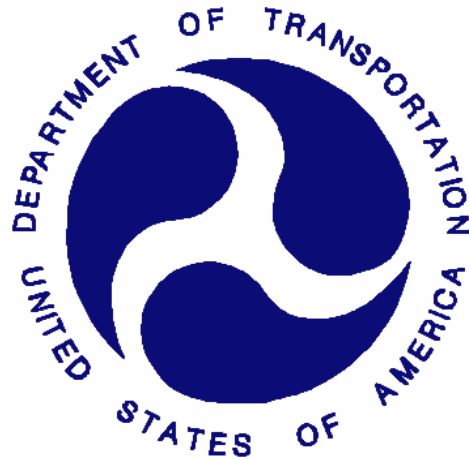

Test Date: May 26, 2011

Final Report Date: June 15, 2011

FINAL REPORT

**PREPARED FOR:
U.S. DEPARTMENT OF TRANSPORTATION
NATIONAL HIGHWAY TRAFFIC SAFETY ADMINISTRATION
ENFORCEMENT
OFFICE OF VEHICLE SAFETY COMPLIANCE
1200 NEW JERSEY AVENUE, S.E., NVS-220
WASHINGTON, D.C. 20590**

Technical Report Documentation Page

1. Report No. 301-MGA-2011-002		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Final Report for Fuel System Integrity Test of a 2011 Volkswagen Jetta NHTSA No.: CB5801				5. Report Date June 1, 2011	
				6. Performing Organization Code MGA	
7. Author(s) Joe Fleck, Project Engineer				8. Performing Organization Report No. 301-MGA-2011-002	
9. Performing Organization Name and Address MGA Research Corporation 5000 Warren Road Burlington, WI 53105				10. Work Unit No.	
				11. Contract or Grant No. DTNH22-06-C-00030	
12. Sponsoring Agency Name and Address U.S. Department of Transportation National Highway Traffic Safety Administration Enforcement, Office of Vehicle Safety Compliance 1200 New Jersey Avenue, S.E., NVS-220 Washington, D.C. 20590				13. Type of Report and Period Covered Final Report May 26, 2011 – June 15, 2011	
				14. Sponsoring Agency Code NVS-220	
15. Supplementary Notes					
16. Abstract A rear impact was conducted on a 2011 Volkswagen Jetta at MGA Research Corporation on May 26, 2011. This test was conducted to obtain data indicant of FMVSS 301R. The impact velocity was 78.7 km/h. The ambient temperature at the time of impact was 12 degrees Celsius.					
17. Key Words Fuel System Integrity Test 2011 Volkswagen Jetta NHTSA No: CB5801				18. Distribution Statement Copies of this report are available from: National Highway Traffic Safety Admin., Technical Ref. Division, 1200 New Jersey Avenue, SE Washington, D.C. 20590	
19. Security Classif. (of this report) Unclassified		20. Security Classif. (of this page) Unclassified		21. No. of Pages 57	22. Price

TABLE OF CONTENTS

<u>Section</u>		<u>Page No</u>
1	Purpose and Summary of Test	1
2	Data Sheets	2

<u>Data Sheet No.</u>		<u>Page No.</u>
1	Test Vehicle Specifications	2
2	Pre-Test Data	4
3	Moving Barrier Data	6
4	Post-Test Data	7
5	Static Rollover Test Data	8

<u>Form No.</u>		
1	Test Vehicle Information	10

<u>Appendix</u>		
A	Photographs	A

SECTION 1

PURPOSE AND SUMMARY OF TEST

PURPOSE

This rear impact test is sponsored by the National Highway Traffic Safety Administration (NHTSA) under contract number DTNH22-06-C-00030. The purpose of this test is to reduce deaths and injuries occurring from fires that result from fuel spillage during and after motor vehicle crashes and resulting from ingestion of fuels during siphoning.

SUMMARY

A 2011 Volkswagen Jetta was impacted by a Moving Deformable Barrier (MDB) at a velocity of 78.7 km/h. The test was performed at MGA Research Corporation on May 26, 2011. Pre-and post-test photographs of the vehicle and dummies can be found in Appendix A.

One real-time camera and five high-speed cameras were used to document the impact event.

- Left Rear Half 1000 fps
- Right Rear Half 1000 fps
- Left Overall 1000 fps
- Overhead Overall 1000 fps
- Right Overall 1000 fps
- Real Time Pan 30 fps

Two ballast Part 572E, 50th percentile male anthropomorphic test devices (ATDs) were placed in the driver and right-front passenger seating positions according to dummy placement instructions specified in the Laboratory Indicant Test Procedure.

There was no Stoddard Solvent leakage after the event or during any phase of the static rollover.

The vehicle appeared to comply with all the requirements of FMVSS No. 301 "Fuel System Integrity."

**SECTION 2
DATA SHEETS**

**DATA SHEET NO. 1
TEST VEHICLE SPECIFICATIONS**

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

TEST VEHICLE INFORMATION

Manufacturer	Volkswagen DE Mexico
Model	Jetta
Body Style	Passenger Car
Major Options	None
NHTSA No.	CB5801
VIN	3VW1K7AJ2BM056484
Color	Reflex Silver Metallic
Delivery Date	4/22/11
Odometer Reading (mile)	166
Dealer	ED Schmidt Auto Group
Transmission	Manual
Final Drive	Front Wheel Drive
Number of Cylinders	4
Engine Displacement (L)	2.0
Engine Placement	Lateral

DATA FROM VEHICLE'S CERTIFICATION LABEL

Manufactured By	Volkswagen DE Mexico
Date of Manufacture	01/11

GVWR (kg)	1820
GAWR Front (kg)	910
GAWR Rear (kg)	960

VEHICLE CAPACITY DATA

Measured Parameter	Front	Rear	Third	Total
Type of Seats	Bucket	Split Bench		
Number of Occupants	2	3		5
Capacity Wt. (VCW) (kg)				495
Number of Occupants x 68 kg.				340
Cargo Wt. (RCLW) (kg)				155

DATA SHEET NO. 1 (continued)
TEST VEHICLE SPECIFICATIONS

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

DATA FROM VEHICLE'S TIRE PLACARD

Measured Parameter	Front	Rear
Maximum Tire Pressure (kPa)	350	350
Cold Pressure (kPa)	220	220
Recommended Tire Size	P195/65R15	P195/65R15
Recommended Load Range	91H	91H
Tire Size on Vehicle	P195/65R15	P195/65R15
Tire Manufacturer	Continental	Continental
Location of Placard of Vehicle	Lower B-Pillar	
Type of Spare Tire (full size/space saver)	Full Size	

DATA SHEET NO. 2

PRE-TEST DATA

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

WEIGHT OF TEST VEHICLE

	Units	As Delivered (UVW) (Axle)			As Tested (ATW) (Axle)		
		Front	Rear	Total	Front	Rear	Total
Left	kg	374.2	273.1		423.2	374.2	
Right	kg	377.4	282.1		423.2	381.9	
Ratio	%	57.5	42.5		52.8	47.2	
Totals	kg	751.6	555.2	1306.8	846.4	756.1	1602.5

CALCULATION OF TARGET TEST WEIGHT (TTW)

Measured Parameter	Units	Value
Total Delivered Weight (UVW)	kg	1306.8
Rated Cargo/Luggage Weight (RCLW)	kg	155
Weight of 2 P572E ATDs	kg	148
Calculated Vehicle Target Weight (TVTW)	kg	1609.8

Vehicle Wheelbase	2651 mm
Vehicle Width	1782 mm
Weight of Ballast Secured in Rear Seat	153.8 kg
Method of Securing Ballast	Ratchet Straps
Vehicle Components Removed for Weight Reduction	None

VEHICLE ATTITUDES

	Units	LF	RF	LR	RR
As Delivered	mm	671	673	683	689
As Tested	mm	649	650	641	642

DATA SHEET NO. 2 (continued)

PRE-TEST DATA

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

FUEL SYSTEM DATA

	Units: Liters
Usable Capacity of "Standard Tank" (Owner's Manual)	55.0
Usable Capacity Figure Furnished by COTR	55.0
Usable Capacity of "Optional" Tank	
92-94% of Usable Capacity	50.6 to 51.7
Actual Test Volume (entire fuel system filled)	51.1

Test Fluid Type	Stoddard Solvent
Test Fluid Kinematic Viscosity (centistokes)	2.1 cSt @ 20° C
Test Fluid Color	Purple
Type of Vehicle Fuel Pump	Electrical
Activate Electric Fuel Pump Operation with Ignition Switch ON, but Engine OFF	Yes

Comments (noticeable attributes of fuel system components, capacity, etc.)	None
--	------

DATA SHEET NO. 3
MOVING BARRIER DATA

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

MOVING BARRIER'S TEST WEIGHT

	Units	Front	Rear	Total
Left	kg	374.2	308.8	
Right	kg	389.5	291.2	
Ratio	%	56.0	44.0	
Totals	kg	763.7	600.0	1363.7

Tires (Mfr, line, size)	Kumho
Tire Pressure (kPa)	207
Brake Abort System (Yes/No)?	Yes
Date of Last Calibration	8/6/2008

DATA SHEET NO. 4

POST-TEST DATA

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

IMPACT VELOCITY

	Units: km/h
Required Impact Velocity	80.0
Actual Impact Velocity (Trap No. 1)	78.7
Actual Impact Velocity (Trap No. 2)	78.7
Average Impact Speed	78.7

Temperature at Time of Impact (°C)	12
Test Time	1:18 pm

WELDING ROD IMPACT POINT

	Units: mm
Vertical distance from target center (+ above target / - below target)	12 up
Horizontal distance from target center (+ to the right / - to the left)	2 left


DATA SHEET NO. 5
STATIC ROLLOVER TEST DATA

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

STODDARD SOLVENT SPILLAGE MEASUREMENT

- A. From impact until vehicle motion ceases: 0 g
 (Maximum Allowable = 28 grams)
- B. For the 5 minute period after motion ceases: 0 g
 (Maximum Allowable = 28 grams)
- C. For the following 25 minutes: 0 g
 (Maximum Allowable = 28 grams/minute)
- D. Spillage: None

FMVSS 301 STATIC ROLLOVER DATA

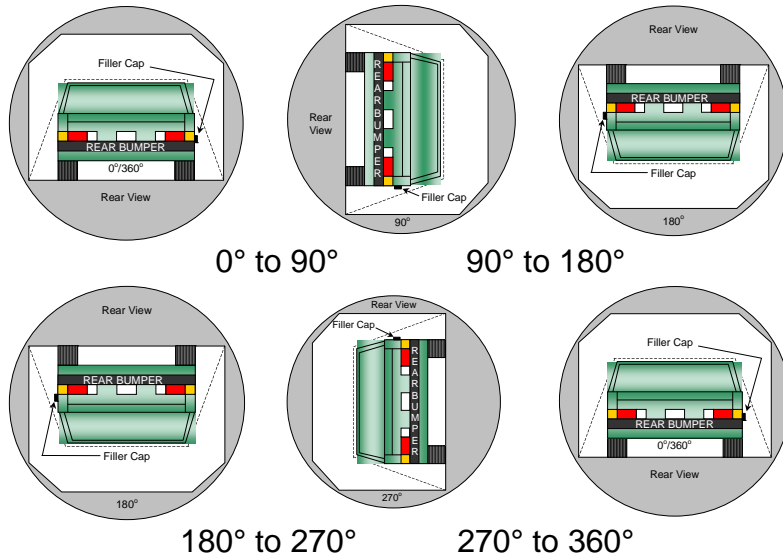

1. The specified fixture rollover rate for each 90° of rotation is 60 to 180 seconds.

2. The position hold time at each position is 300 seconds (minimum).

3. Details of Stoddard Solvent spillage locations: **Not Applicable**

DATA SHEET NO. 5 (continued)
STATIC ROLLOVER TEST DATA

Test Vehicle: 2011 Volkswagen Jetta NHTSA No.: CB5801
 Test Program: FMVSS 301 Fuel System Integrity Test Date: 5/26/2011

STODDARD SOLVENT SPILLAGE MEASUREMENT
Hold Time = 5 minutes at all intervals

0° TO 90° Rotation Time (sec) = 118 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	

90° TO 180° Rotation Time (sec) = 109 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	

180° TO 270° Rotation Time (sec) = 105 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	

270° TO 360° Rotation Time (sec) = 118 sec

Test Phase	Spillage (g)	Spillage Details
First 5 minutes from onset of rotation	0	
Sixth minute from onset of rotation	0	
Seventh minute from onset of rotation	0	
Eight minute if required	N/A	


FORM 1
TEST VEHICLE INFORMATION

Test Vehicle: 2011 Volkswagen Jetta
Test Program: FMVSS 301 Fuel System Integrity

NHTSA No.: CB5801
Test Date: 5/26/2011

NORMAL DESIGN RIDING POSITION

With the seat in the mid fore-aft seat track position the angle of the driver's seat back when it is in the nominal riding position is set on seat back frame at 19.0 degrees. Front outboard passenger seat is set at 19.1 degrees.

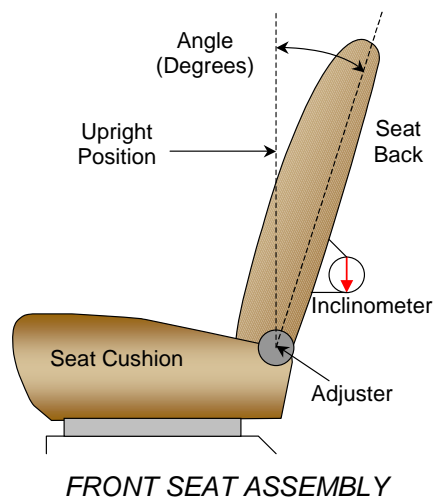

Driver Seat Back Angle	19.5° on seat back frame
Passenger Seat Back Angle	18.8° on seat back frame

SEAT FORE/AFT POSITIONING

	Total Fore/Aft Travel	Placed in Position #
Driver Seat	250 mm	125 mm
Passenger Seat	170 mm	90 mm

D-RING ADJUSTMENT

The driver and passenger D-rings were full up.

STEERING COLUMN ADJUSTMENT

The steering column was placed in the mid position.

APPENDIX A
PHOTOGRAPHS

TABLE OF PHOTOGRAPHS


		<u>Page No.</u>
Photo No. 1.	Vehicle's Certification Label	A-1
Photo No. 2.	Vehicle's Tire Placard	A-2
Photo No. 3.	Pre-Test Front View of Vehicle	A-3
Photo No. 4.	Post-Test Front View of Vehicle	A-4
Photo No. 5.	Pre-Test Left Side View of Vehicle	A-5
Photo No. 6.	Post-Test Left Side View of Vehicle	A-6
Photo No. 7.	Pre-Test Left Rear Close-up View of Vehicle	A-7
Photo No. 8.	Post-Test Left Rear Close-up View of Vehicle	A-8
Photo No. 9.	Pre-Test Right Side View of Vehicle	A-9
Photo No. 10.	Post-Test Right Side View of Vehicle	A-10
Photo No. 11.	Pre-Test Right Rear Close-up View of Vehicle	A-11
Photo No. 12.	Post-Test Right Rear Close-up View of Vehicle	A-12
Photo No. 13.	Pre-Test Rear View of Vehicle	A-13
Photo No. 14.	Post-Test Rear View of Vehicle	A-14
Photo No. 15.	Pre-Test $\frac{3}{4}$ Frontal View From Right Side of Vehicle	A-15
Photo No. 16.	Post-Test $\frac{3}{4}$ Frontal View From Right Side of Vehicle	A-16
Photo No. 17.	Pre-Test $\frac{3}{4}$ Rear View From Right Side of Vehicle	A-17
Photo No. 18.	Post-Test $\frac{3}{4}$ Rear View From Right Side of Vehicle	A-18
Photo No. 19.	Pre-Test $\frac{3}{4}$ Rear View From Left Side of Vehicle	A-19
Photo No. 20.	Post-Test $\frac{3}{4}$ Rear View From Left Side of Vehicle	A-20
Photo No. 21.	Pre-Test Impact Point	A-21
Photo No. 22.	Post-Test Impact Point	A-22
Photo No. 23.	Pre-Test Underbody View 1	A-23
Photo No. 24.	Post-Test Underbody View 1	A-24
Photo No. 25.	Pre-Test Underbody View 2	A-25
Photo No. 26.	Post-Test Underbody View 2	A-26
Photo No. 27.	Pre-Test Underbody View 3	A-27

Page No.


Photo No. 28.	Post-Test Underbody View 3	A-28
Photo No. 29.	Pre-Test Underbody View 4	A-29
Photo No. 30.	Post-Test Underbody View 4	A-30
Photo No. 31.	Pre-Test Front View of MDB	A-31
Photo No. 32.	Post-Test Front View of MDB	A-32
Photo No. 33.	Pre-Test $\frac{3}{4}$ Right Side View of MDB	A-33
Photo No. 34.	Post-Test $\frac{3}{4}$ Right Side View of MDB	A-34
Photo No. 35.	Pre-Test $\frac{3}{4}$ Left Side View of MDB	A-35
Photo No. 36.	Post-Test $\frac{3}{4}$ Left Side View of MDB	A-36
Photo No. 37.	Pre-Test Top View of MDB	A-37
Photo No. 38.	Post-Test Top View of MDB	A-38
Photo No. 39.	Static Rollover at 90 Degrees	A-39
Photo No. 40.	Static Rollover at 180 Degrees	A-40
Photo No. 41.	Static Rollover at 270 Degrees	A-41
Photo No. 42.	Static Rollover at 360 Degrees	A-42

A-1.

MANUFACTURED BY VOLKSWAGEN DE MEXICO S.A. DE C.V. DATE 01.11
GVWR 4012 LBS GAWR FRONT 2006 LBS GAWR REAR 2116 LBS
THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY, BUMPER,
AND THEFT PREVENTION STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.
VEHICLE I.D. NO. 3VW1K7AJ2BM056484 TYPE: PASSENGER CAR
1C0 010 374 C
3 / 10
COUNTRY OF ORIGIN: MEXICO

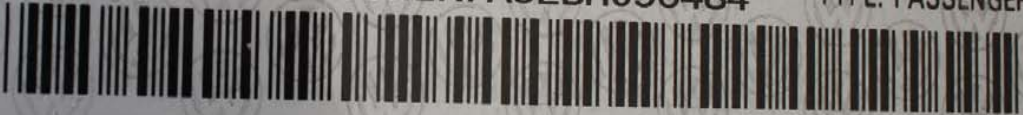

Vehicle's Certification Label

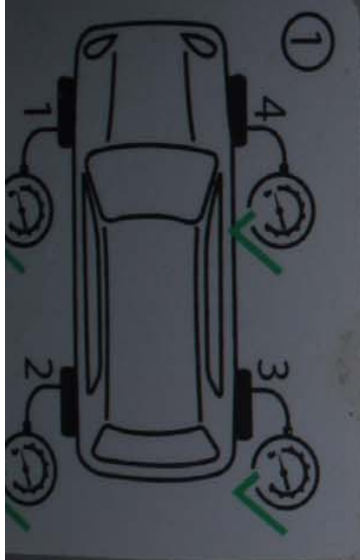

TIRE AND LOADING INFORMATION
RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

SEATING CAPACITY/NOMBRE DE PLACES | TOTAL 5 | FRONT/AVANT 2 | REAR/ARRIÈRE 3

THE COMBINED WEIGHT OF OCCUPANTS AND CARGO SHOULD NEVER EXCEED 495 KG OR 1091 LBS
 LE POIDS TOTAL DES OCCUPANTS ET DU CHARGEMENT NE DOIT JAMAIS DÉPASSER 495 KG OU 1091 LB.

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS À FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
FRONT/AVANT	195/65 R15	220 KPA / 32 PSI	
REAR/ARRIÈRE	195/65 R15	220 KPA / 32 PSI	
SPARE/DE SECOURS	195/65 R15	220 KPA / 32 PSI	

A barcode with the identification number 5C0 010 645 K printed vertically to its right. Below the barcode, the number C 1 is printed.

Vehicle's Tire Placard

A-3.



Pre-Test Front View of Vehicle

A-4.



Post-Test Front View of Vehicle

A-5.



Pre-Test Left Side View of Vehicle

A-6.



Post-Test Left Side View of Vehicle

A-7.



Pre-Test Left Rear Close-up View of Vehicle




Post-Test Left Rear Close-up View of Vehicle

A-9.



Pre-Test Right Side View of Vehicle

A-10.

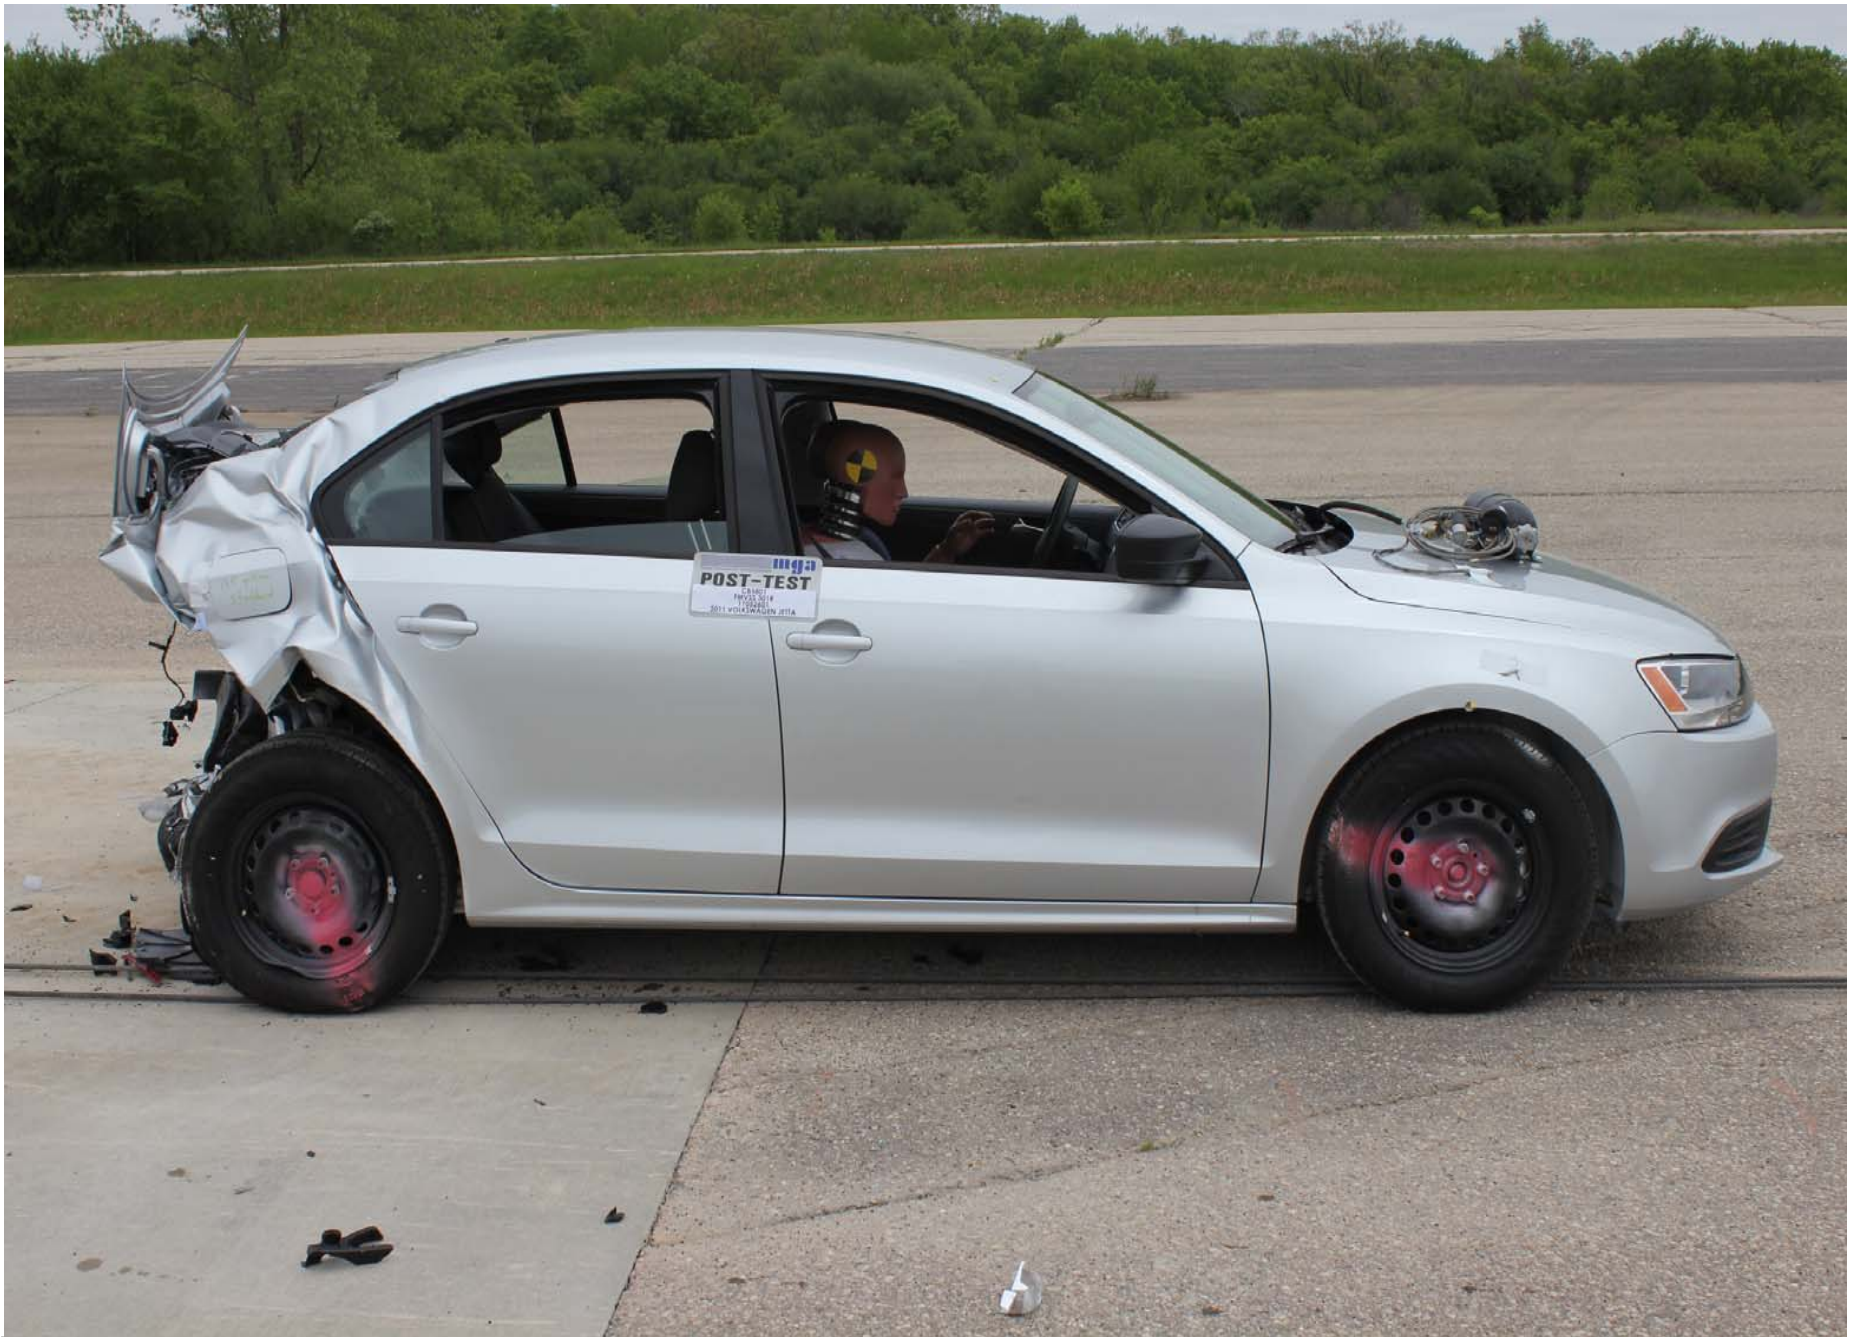

Post-Test Right Side View of Vehicle



Pre-Test Right Rear Close-up View of Vehicle



A-12.

Post-Test Right Rear Close-up View of Vehicle

A-13.



Pre-Test Rear View of Vehicle

A-14.



Post-Test Rear View of Vehicle

A-15.



Pre-Test ¾ Frontal View From Right Side of Vehicle

A-16.



Post-Test $\frac{3}{4}$ Frontal View From Right Side of Vehicle

A-17.



Pre-Test ¾ Rear View From Right Side of Vehicle



Post-Test ¾ Rear View From Right Side of Vehicle



Pre-Test $\frac{3}{4}$ Rear View From Left Side of Vehicle



Post-Test ¾ Rear View From Left Side of Vehicle

JET

mga research corporation

PRE-TEST

CB5801
FMVSS 301R
11052601
2011 VOLKSWAGEN


A-21.

Pre-Test Impact Point

A-22.




Post-Test Impact Point

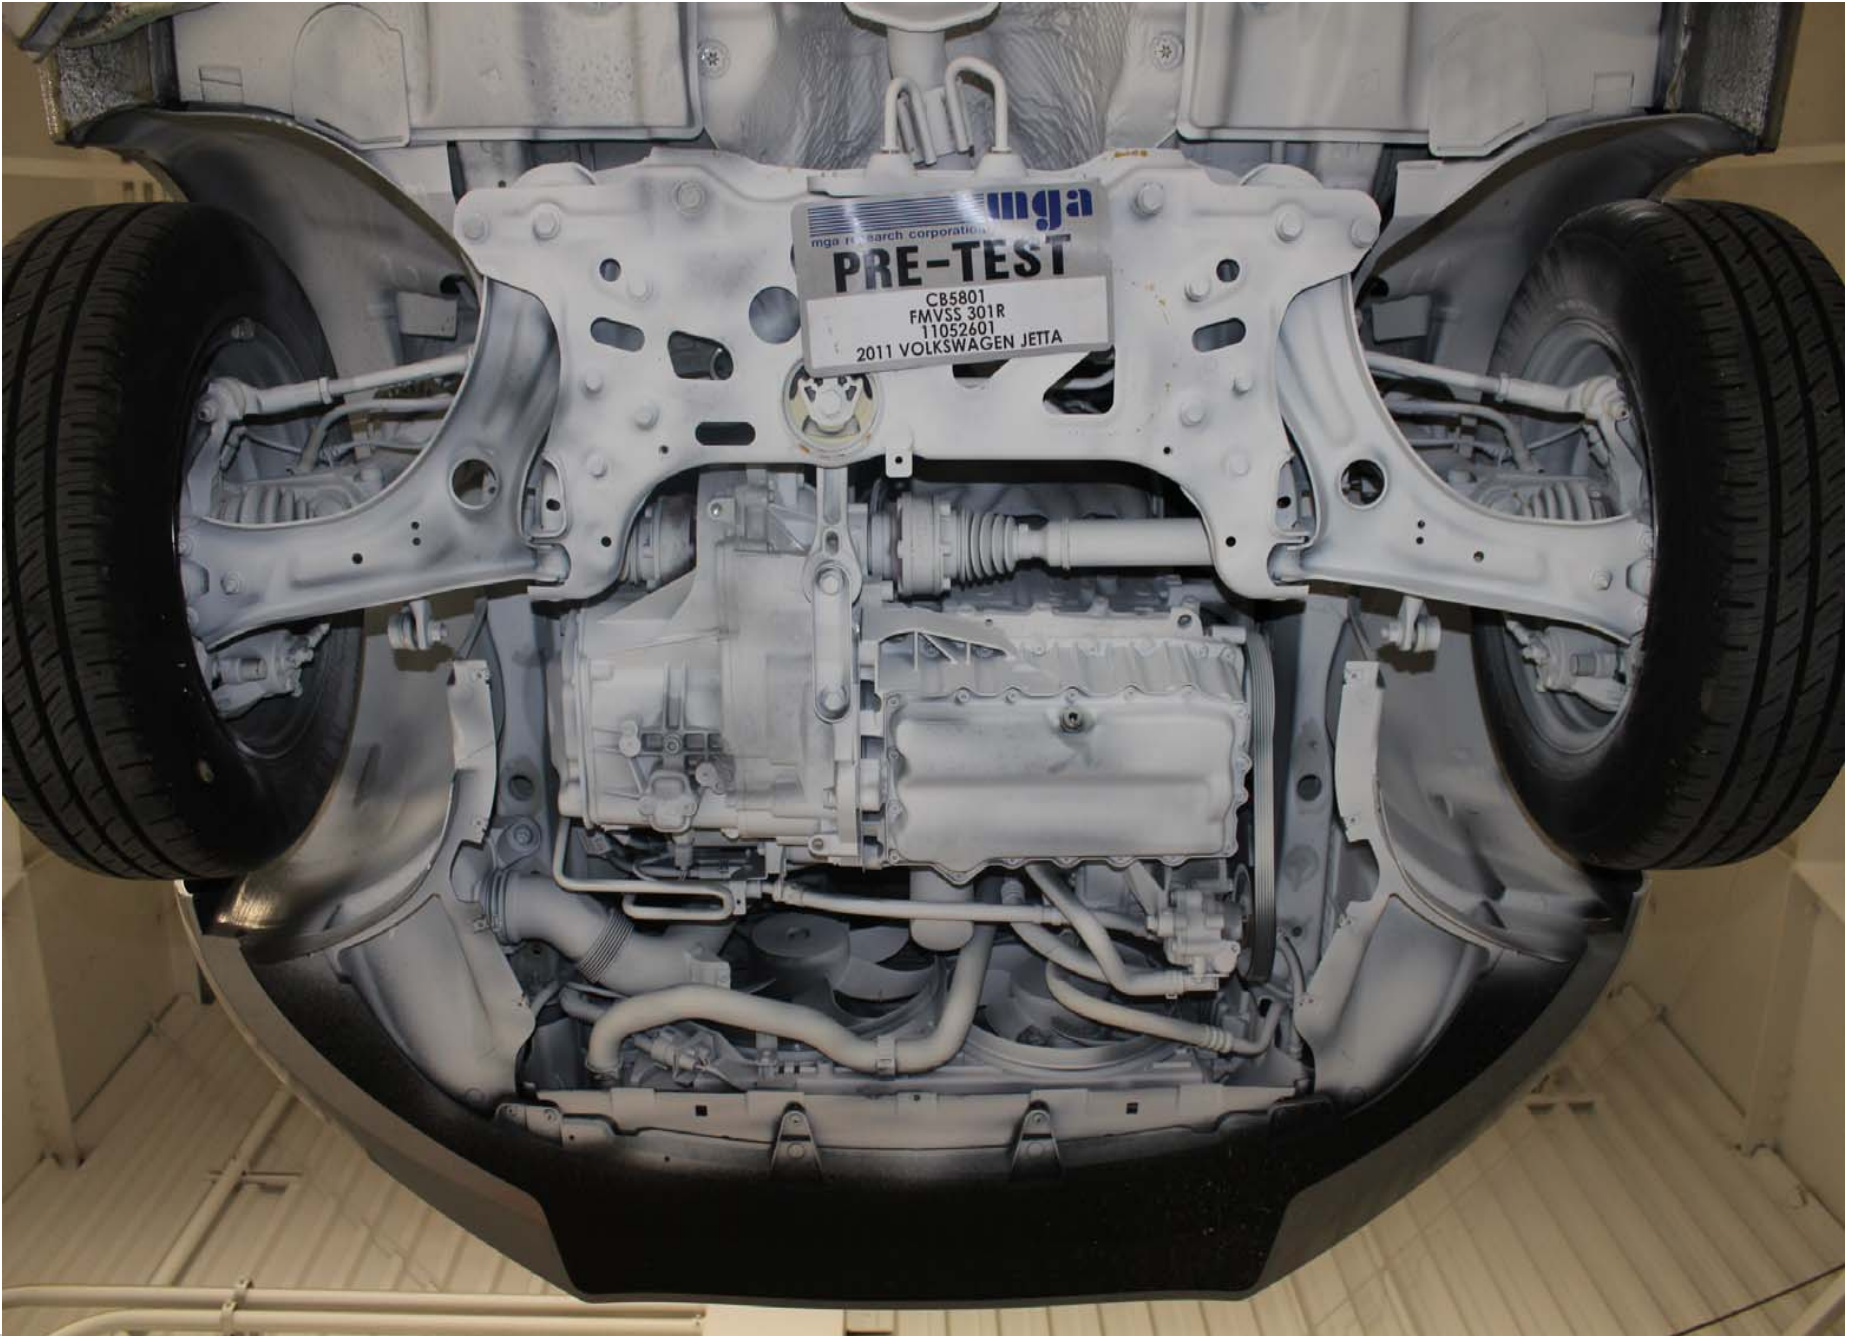


A-23.

Pre-Test Underbody View 1

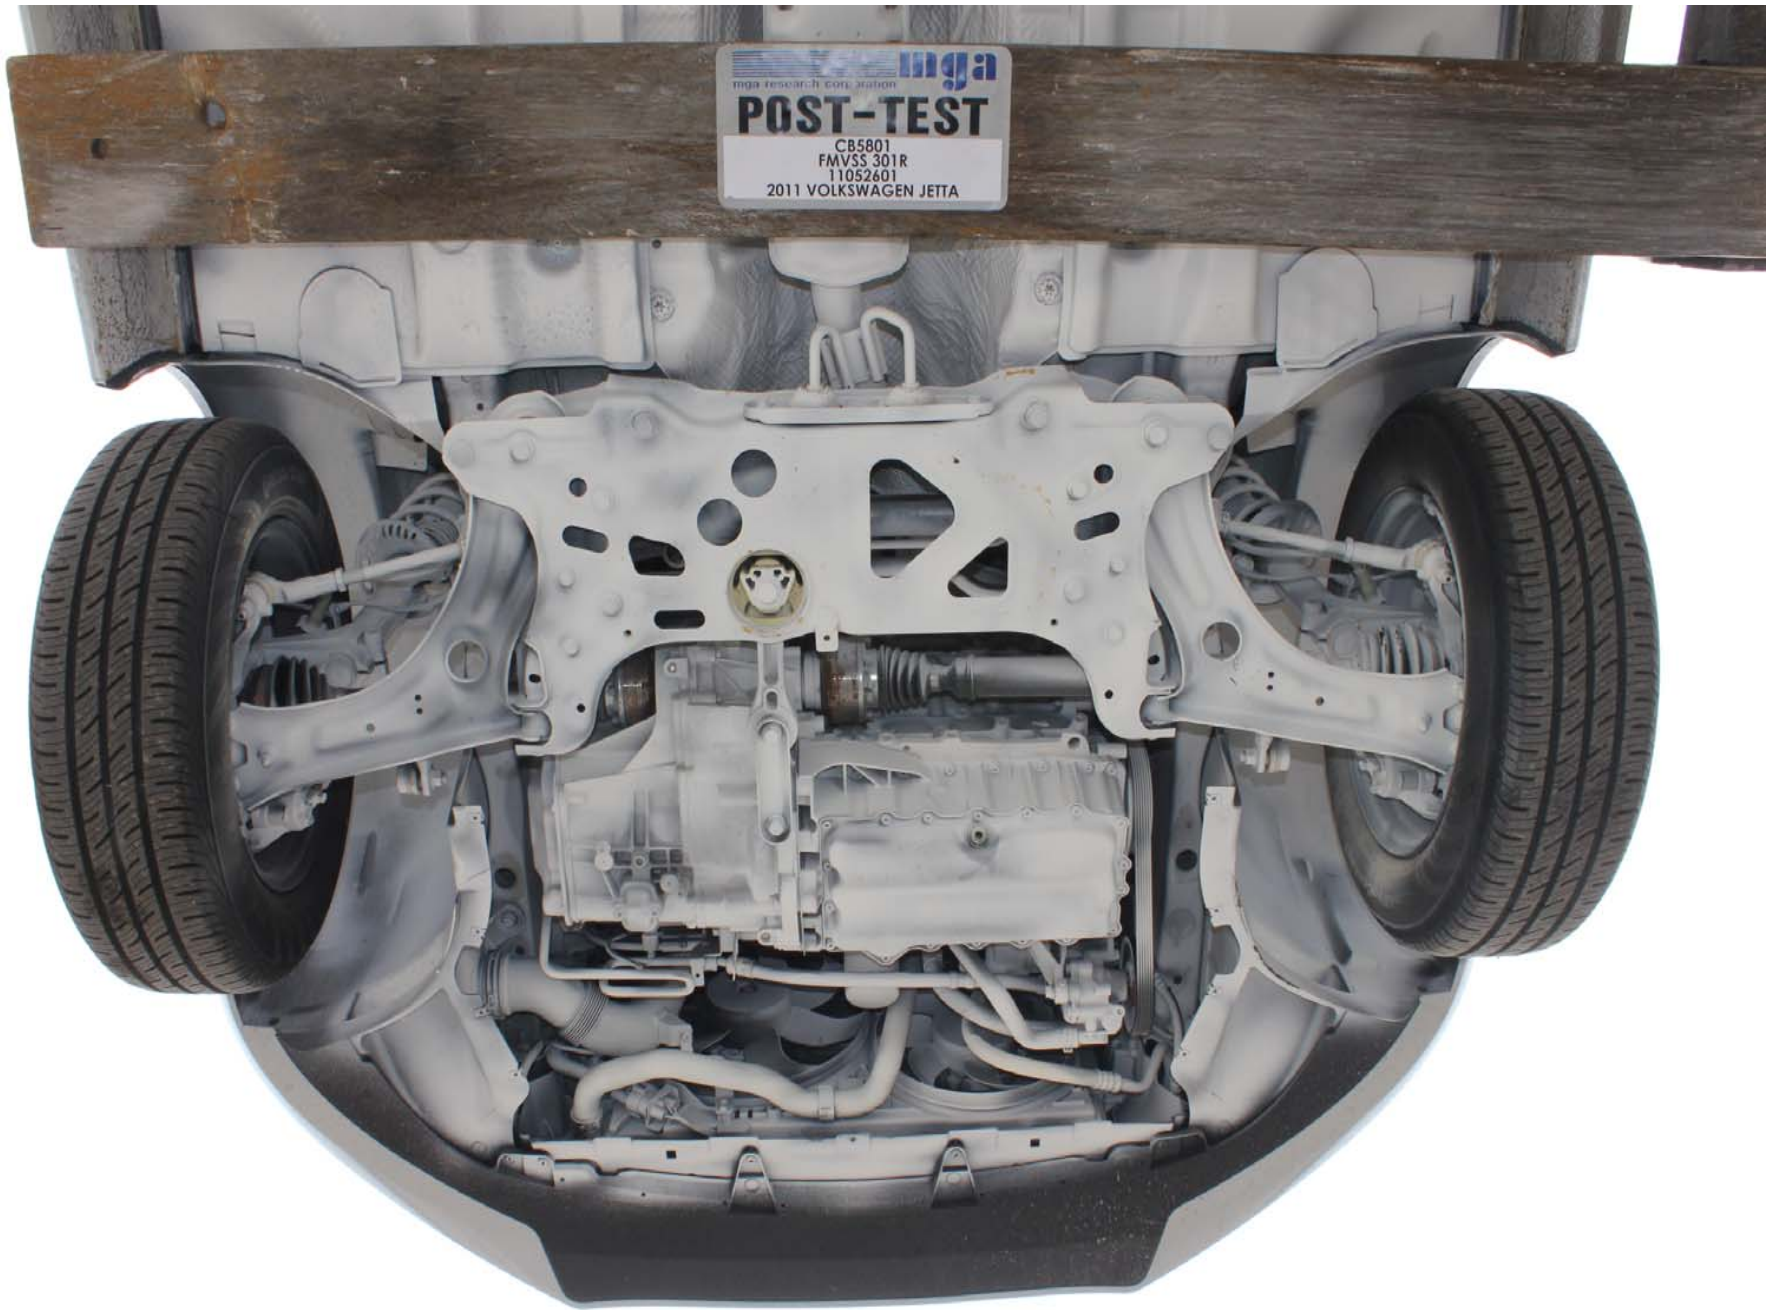

Post-Test Underbody View 1

A-25.

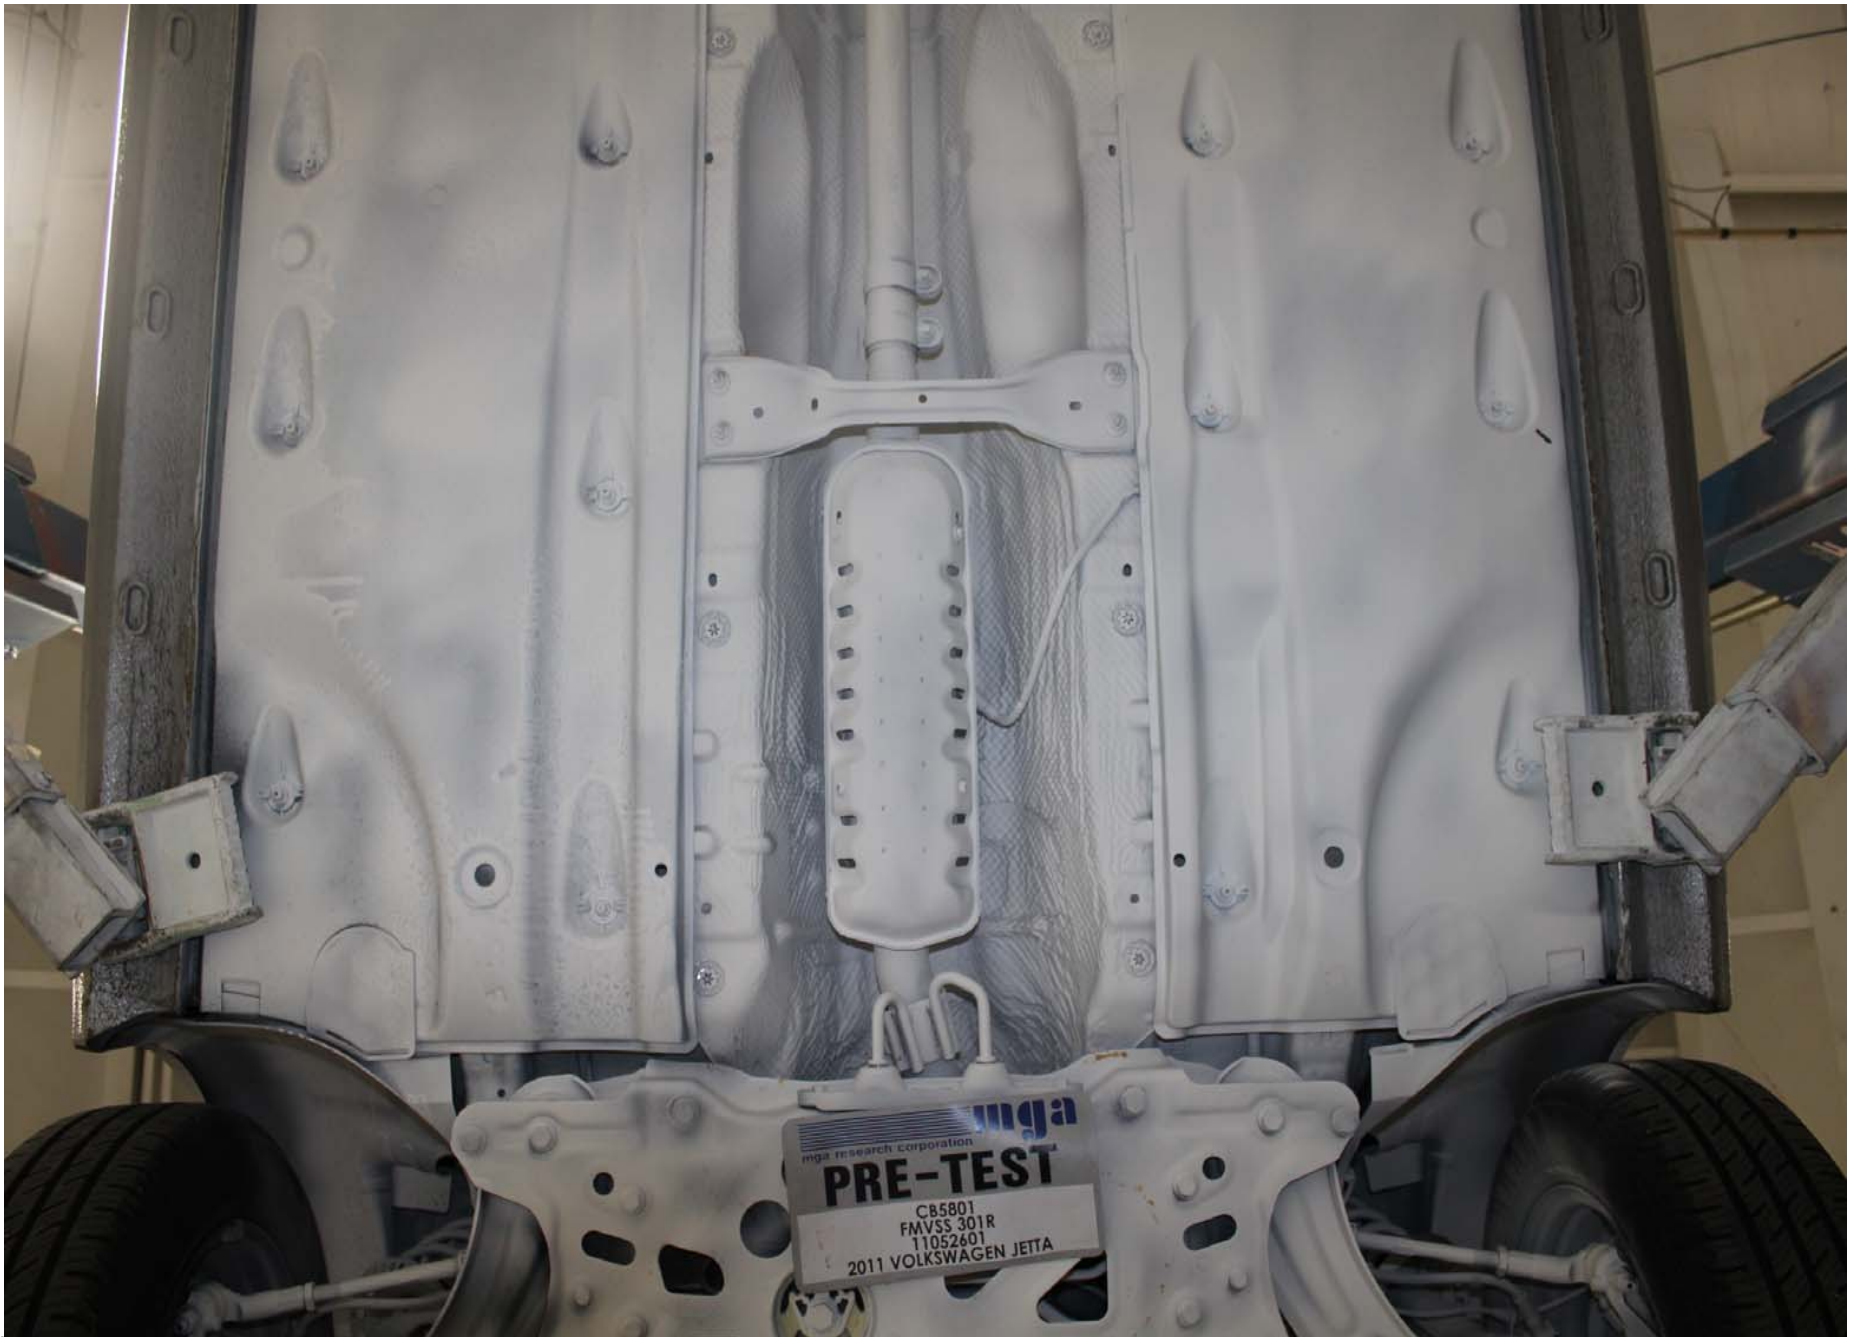

Pre-Test Underbody View 2

A-26.




Post-Test Underbody View 2

A-27.



Pre-Test Underbody View 3

A-28.

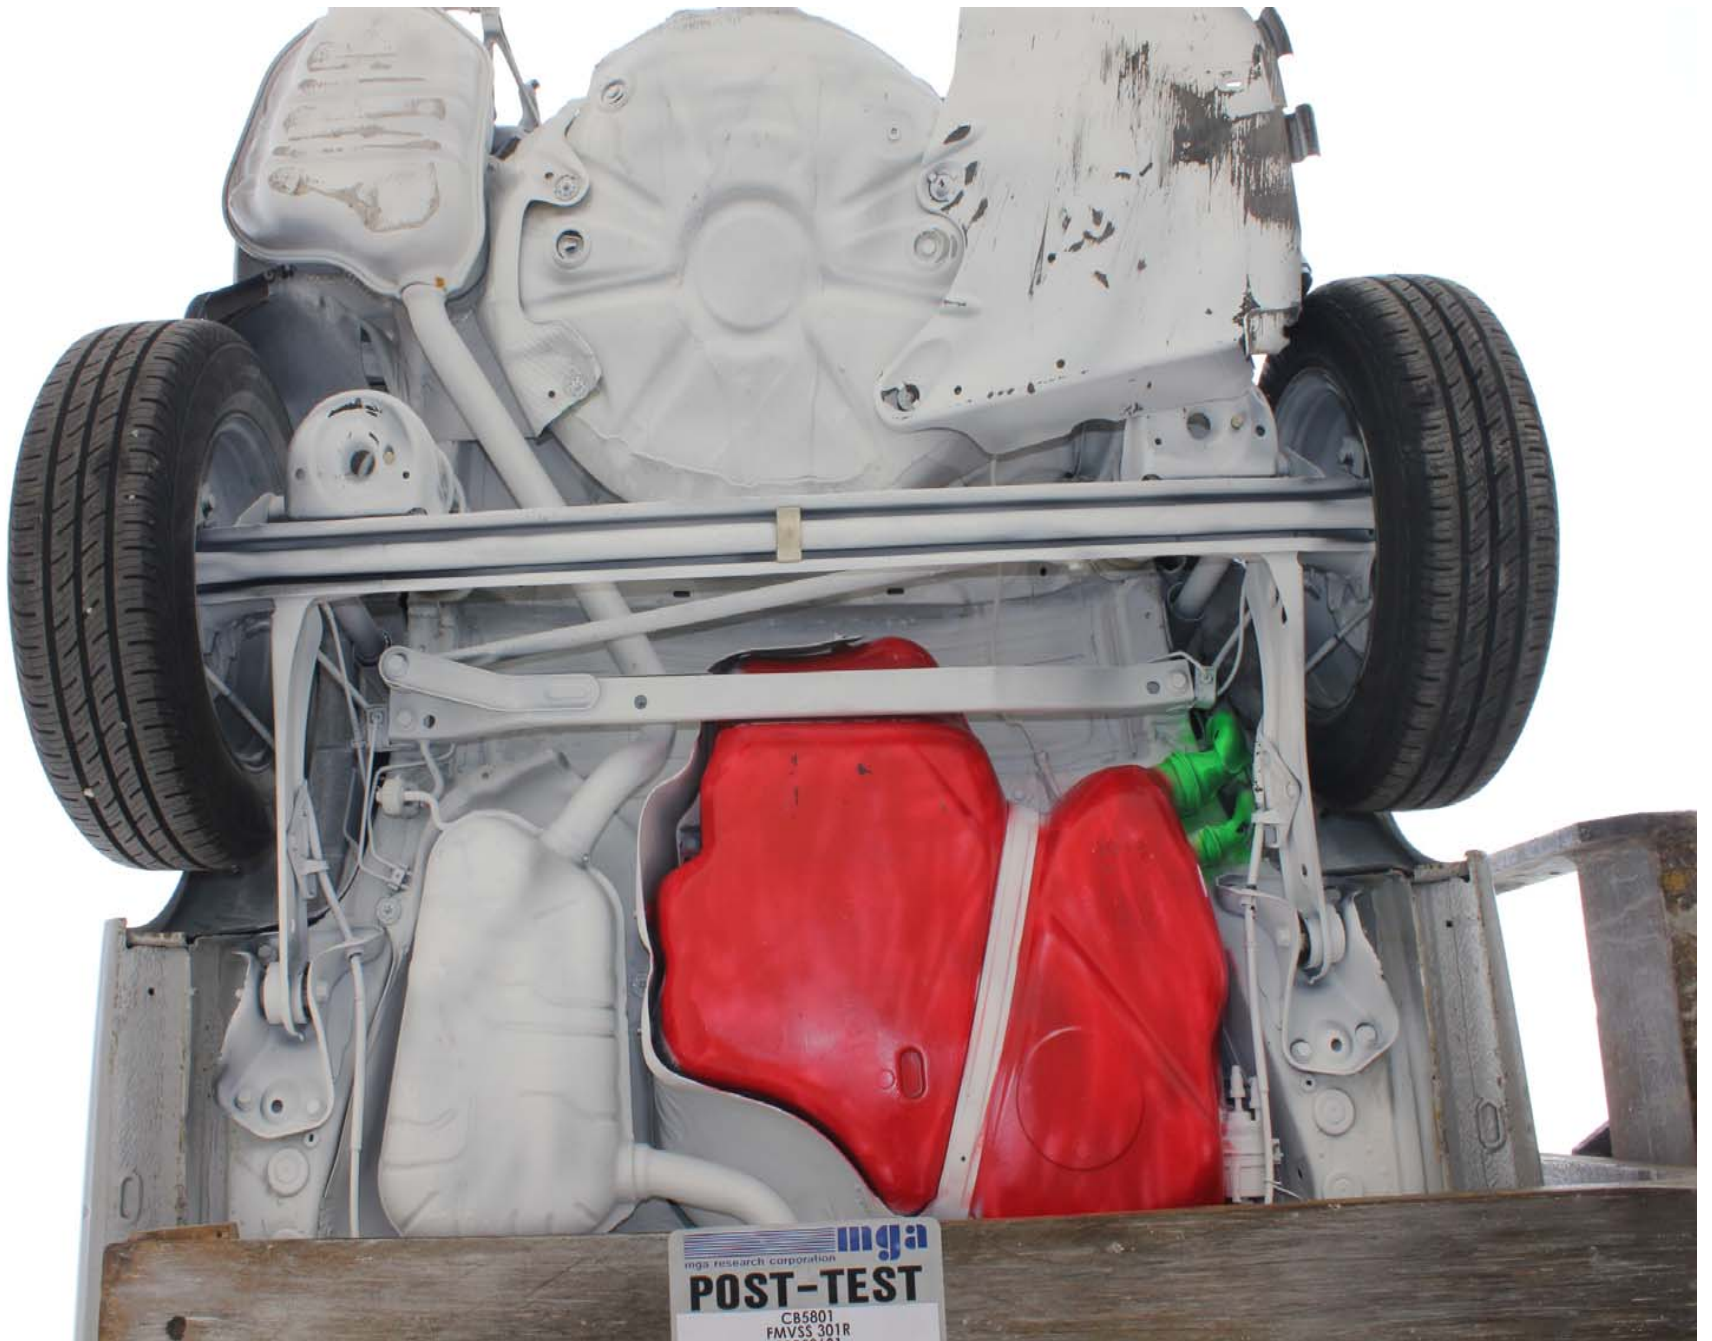

Post-Test Underbody View 3

A-29.



Pre-Test Front View of MDB

A-30.



Post-Test Front View of MDB

A-31.



Pre-Test $\frac{3}{4}$ Right Side View of MDB

A-32.



Post-Test ¾ Right Side View of MDB

A-33.




Pre-Test $\frac{3}{4}$ Left Side View of MDB

A-34.



Post-Test $\frac{3}{4}$ Left Side View of MDB

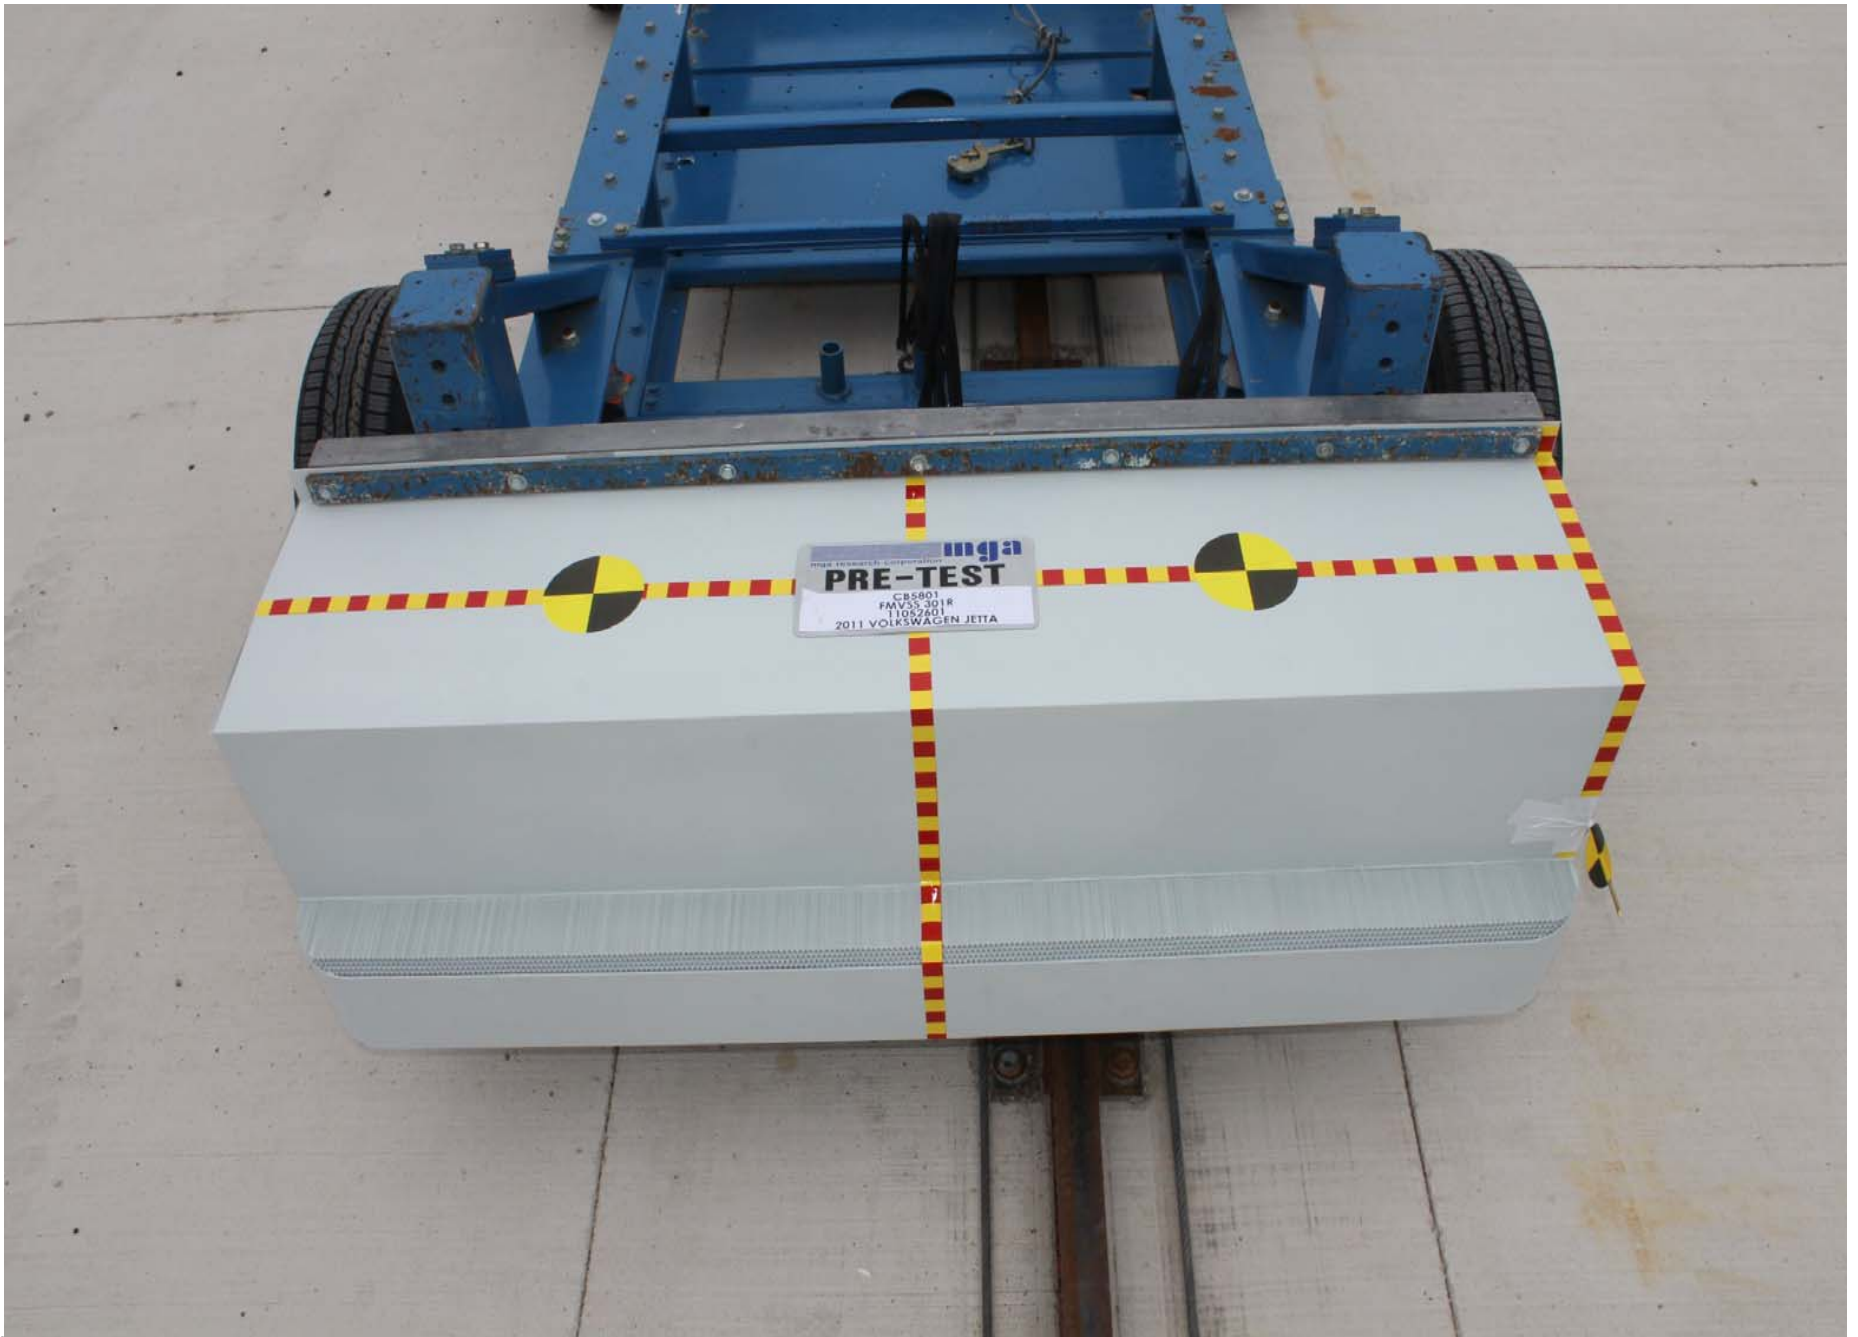


Pre-Test Top View of MDB

A-36.



Post-Test Top View of MDB

A-37.

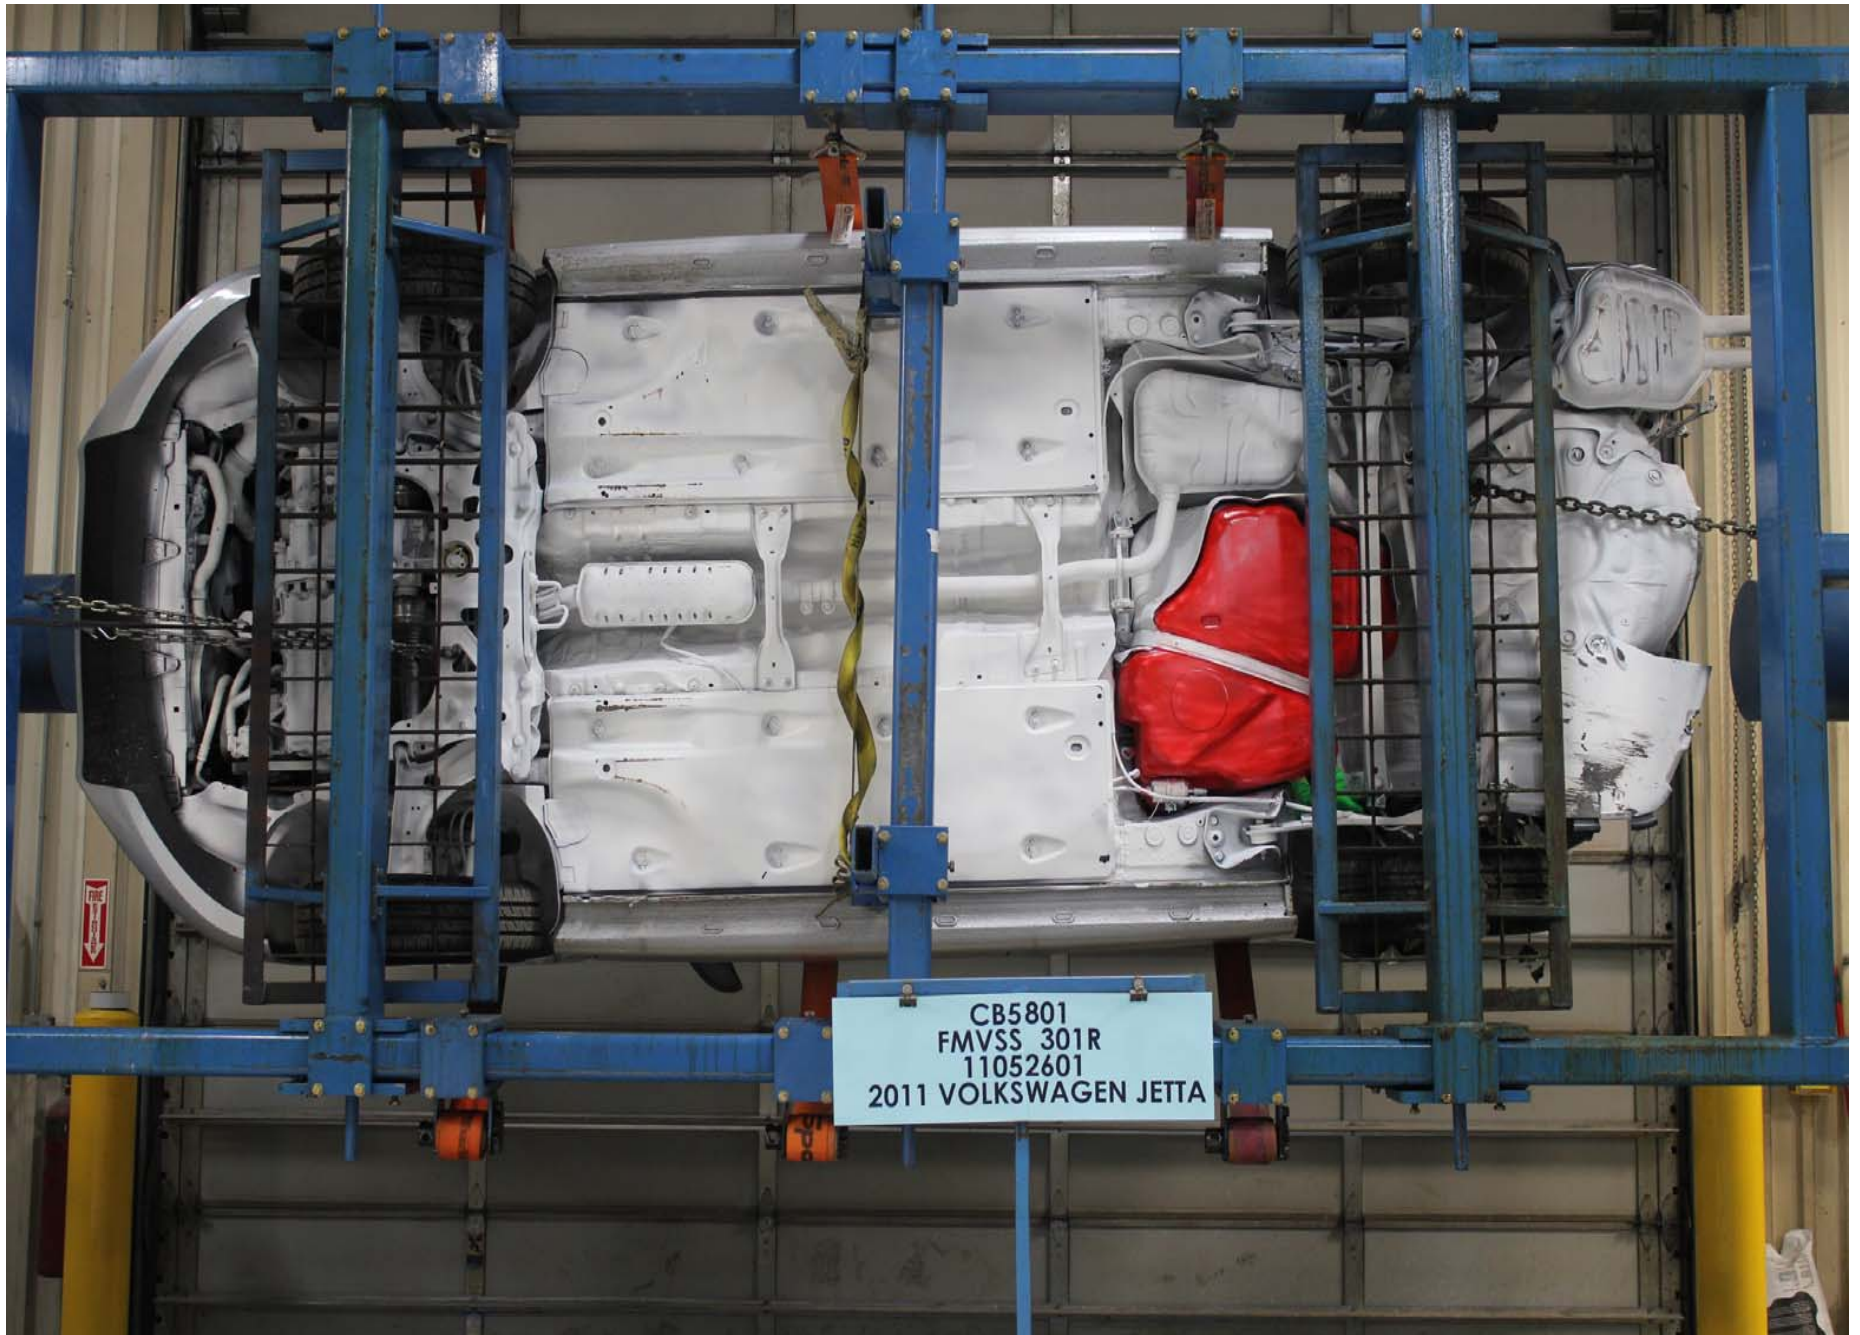

Static Rollover at 90 Degrees



A-38.

Static Rollover at 180 Degrees



A-39.

Static Rollover at 270 Degrees

A-40.



Static Rollover at 360 Degrees